

LANDA SOLENOID

H2015 SPECIFICATION Holding solenoid

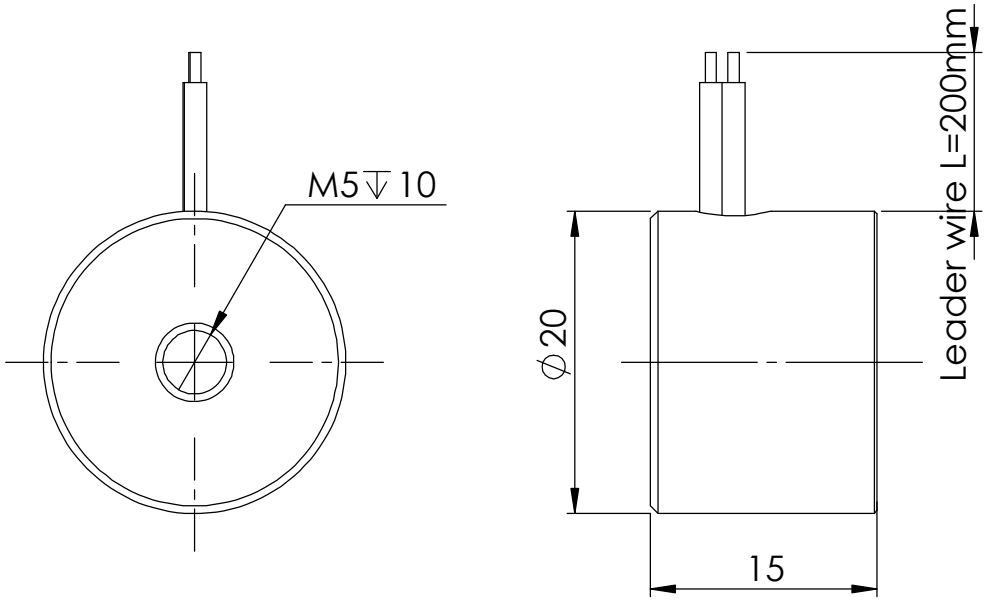

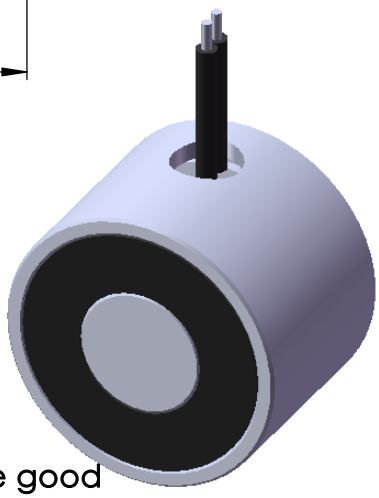

- Total weight：25g
- Unit：mm
- Leader wire：UL1007 26AWG
- Insulation：B（130℃）
- Hi-pot Test：AC1000V 50/60Hz 2S

Notice about holding solenoid：
- .The magnetic conductivity of the holding material should be good
- .The holding surface should be flat and clean
- .It would be better if the thickness over 3mm
- .The contact area should be larger than the holding surface of magnet

Solenoid Data

Duty cycle（%）$=\frac{\text{ON time}}{\text{ON time +OFF time}}\times 100\%$		100%	50%
		continuous	or less
MAX “on” time （S）		∞	50
Watts at @25℃ （W）		2.2	4.4
Holding Force @25℃ (N)		35	45
Type no.	Resistance(25℃)(Ω)	volts DC	
H2015-12A65	65	12	18
H2015-24A260	260	24	34