

LANDA SOLENOID

H1625 SPECIFICATION

Holding solenoid

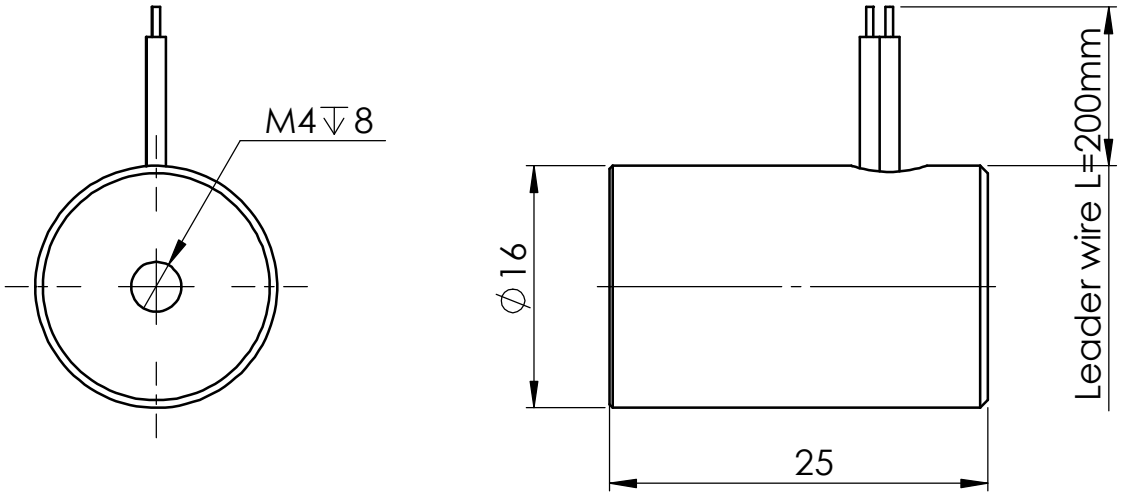

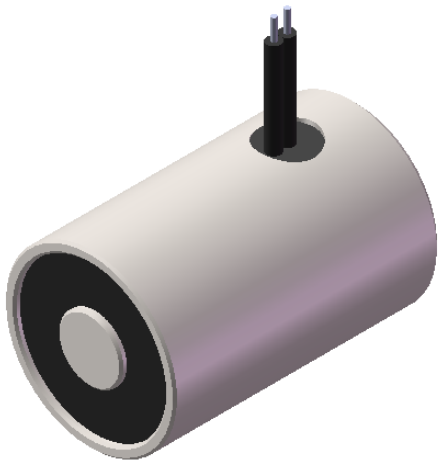

- Total weight：25g
- Unit：mm
- Leader wire:UL1007 26AWG
- Insulation：B（130℃）
- Hi-pot Test：AC1000V 50/60Hz 2S

Notice about holding solenoid：

- The magnetic conductivity of the holding material should be good
- The holding surface should be flat and clean
- It would be better if the thickness over 3mm
- The contact area should be larger than the holding surface of magnet

Solenoid Data

Duty cycle（%）$=\frac{\text{ON time}}{\text{ON time +OFF time}}\times 100\%$		100%	50%
		continuous	or less
MAX “on” time （S）		∞	50
Watts at @25℃ （W）		1.6	3.2
Holding Force @25℃ (N)		10	12
Type no.	Resistance(25℃)(Ω)	volts DC	
H1625-12A90	90	12	17
H1625-24A360	360	24	34