



ROOF VENTILATOR





IP32 CE -20 +80 °C



Installation conditions

- Small size and light weight
- Not occupying excess space
- Adopting high-performance, industrial grade ball bearing fans
- Completely reduce the internal temperature of the cabinet in a short period of time

SPECIFICATION

Fan model	F2E190-230-DP (115V,400V Customizable)	F2E220-230-DP (115V,400V Customizable)	F2E225-230-DP (115V,400V Customizable)
Rated working voltage V/Hz	230V AC 50/60Hz	230V AC 50/60Hz	230V AC 50/60Hz
Air flow rate, free blowing	570/620m ³ /h	860/1000m ³ /h	1200/1340m ³ /h
Air flow rate, Equipped with standard filter mat	1xLK6626.300: 456/496m ³ /h	1xLK6626.300: 688/720m ³ /h	1xLK6626.300: 960/1072m ³ /h
Rated current	0.28/0.31A	0.38/0.40A	0.60/0.88A
Power	58/75W	85/90W	120/180W
Noise level	59/61dBA	67/70dBA	68/71dBA
Temperature range	-10°C~60°C	-10°C~60°C	-10°C~60°C

DIMENSION (mm)

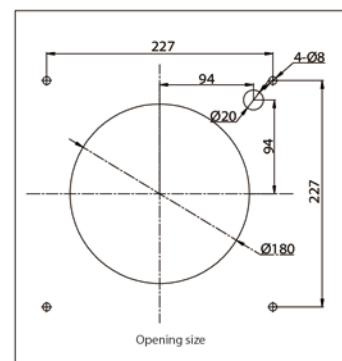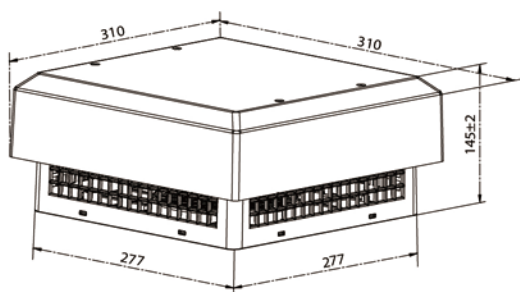


IP43
CE

-10 +60
°C




Installation conditions

- Quick installation: simply snap it into place without screws
- Adjustable buckle fits cabinets with thicknesses ranging from 1.5~3.5mm
- Rated IP43; includes standard G3-grade filter cotton
- Filter cotton can be replaced quickly without tools-just turn the top knob
- AC voltage is standard; DC voltage is available upon request

SPECIFICATION

Fan model	REF600.230	REF600.115	REF600.024
Rated working voltage V/Hz	230V AC 50/60Hz	230V AC 50/60Hz	24V DC
Air flow rate, free blowing	480/520m ³ /h	480/520m ³ /h	500m ³ /h
Air flow rate, Equipped with standard filter mat	1xLK6626.300: 384/416m ³ /h	1xLK6626.300: 384/416m ³ /h	1xLK6626.300: 544m ³ /h
Rated current	0.44/0.48A	0.88/0.96A	0.80A
Power	64/76W	64/76W	19.2W
Noise level	48/52dBA	48/52dBA	48/52dBA
Temperature range	-10°C~60°C	-10°C~60°C	-10°C~60°C

DIMENSION (mm)





IP32




CE

-20 +80
°C**Characteristic**

- Quick installation, can be directly buckled without the need for screws to fix
- Adjustable buckle, suitable for cabinets with different thicknesses of 1.5-3.5mm
- IP32, standard g3 grade filter cotton
- Quickly replace the filter cotton without the need for tools, directly open the top knob
- AC voltage is standard as a standard configuration

SPECIFICATION

Fan model	REF700.230 (115V,400V Customizable)	REF1400.230 (115V,400V Customizable)
Rated working voltage V/Hz	230V AC 50/60Hz	230V AC 50/60Hz
Air flow rate, free blowing	550/600m ³ /h	1150/1350m ³ /h
Air flow rate, Equipped with standard filter mat	1xLK6626.300: 380/410m ³ /h	1xLK6626.300: 750/950m ³ /h
Rated current	0.30/0.35A	0.55/0.65A
Power	55/65W	110/150W
Noise level	62/65dBA	68/71dBA
Temperature range	-20°C~80°C	-20°C~80°C

DIMENSION (mm)



Customizable stainless steel material

IP32

CE

-10 ~ +65
°C


Installation Conditions

- The ambient temperature should be lower than the required temperature inside the control cabinet, when there is insufficient space in the cabinet to install a side mounted filter fan, top mounted fans can be considered
- The cabinet top mounted fan extracts the hot air from the top of the control cabinet while dissipating the heat inside the cabinet outside,
- The use of centrifugal fans can not only avoid the formation of vortex like whirlwinds in the discharge of ordinary shielded magnetic pole fans, but also reduce the
- The noise generated by low air friction with each other


SPECIFICATION

Fan model	PTF60260 (115V,400V Customizable)	PTF60290 (115V,400V Customizable)
Rated working voltage V/Hz	230V AC 50/60Hz	230V AC 50/60Hz
Air flow rate, free blowing	2500/2900m ³ /h	3500m ³ /h
Air flow rate, Equipped with standard filter mat	4xLK6626.300: 2000m ³ /h	1xLK6626.300: 2800m ³ /h
Rated current	0.78/1.0A	1.2A
Power	170/230W	280W
Noise level	66/69dBA	70dBA
Temperature range	-10°C~65°C	-10°C~65°C

DIMENSION (mm)

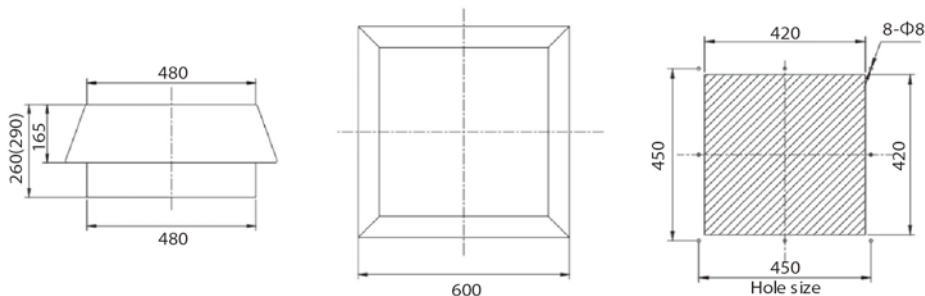

Electrical wiring diagram








Installation conditions

- The ambient temperature should be lower than the required temperature inside the control cabinet
When there is insufficient space in the cabinet to install a side mounted filter fan Consider using a top mounted fan
- The cabinet mounted fan extracts the hot air from the top of the control cabinet while dissipating the heat inside the cabinet outside, protecting the electrical components
inside the control cabinet from operating within a controllable temperature range. And it does not occupy internal space
- Centrifugal fans are mainly capable of discharging high heat loads with maximum efficiency. The use of centrifugal fans can not only avoid the formation of eddy currents
in the discharge of ordinary shielded magnetic pole fans, but also reduce the noise generated by air friction

SPECIFICATION

Fan model	KRF670 (115V,400V Customizable)	KRF1410 (115V,400V Customizable)
Rated working voltage V/Hz	230V AC 50/60Hz	230V AC 50/60Hz
Air flow rate, free blowing	570/620m ³ /h	1200/1340m ³ /h
Air flow rate, Equipped with standard filter mat	1xLK6626.300: 456/496m ³ /h	1xLK6626.300: 960/1072m ³ /h
Rated current	0.28/0.31A	0.60/0.88A
Power	58/75W	120/180W
Noise level	59/61dBA	68/71dBA
Temperature range	-10°C~60°C	-10°C~60°C

DIMENSION (mm)

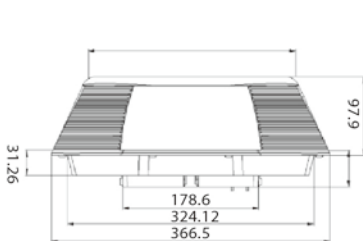


Characteristic


- Compact 1U design with low noise; can be installed anywhere on a standard 482.6mm (19-inch) plane
- Can be used with a front exhaust outlet filter to create a chimney effect for optimal airflow

IP33
CE

-20 +55
°C


SPECIFICATION

Model No.	RCF480-230	RCF480-115	RCF480-024
Dimensions (WxHxD)	484 x 44.5 x 205.5mm		
Air flow parameters			
Non resistance air volume	408/450m³/h		650m³/h
Noise level (DIN 45 635)	48/52dB(A)	48/52dB(A)	48dB(A)
Duty cycle	100%		
Electrical data:			
Fan motor	Capacitor motor		Dcmotor
Rated voltage	230VAC	115VAC	24VDC
Range of operation	220-240V	100-125V	20-26VDC
Frequency	50Hz/60 Hz	50Hz/60 Hz	-
Powerconsumption	57/54W	57/54W	14.4W
Rated current	0.36/0.33 A	0.72/0.66 A	0.60 A

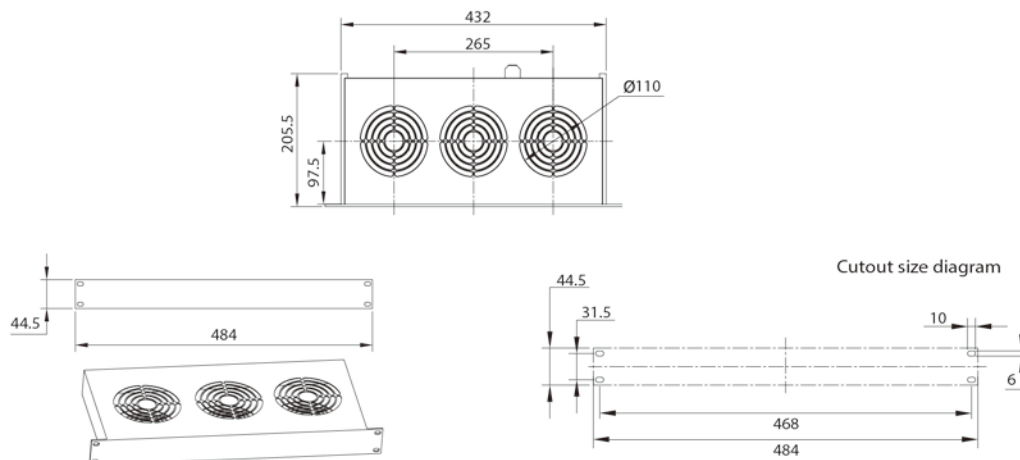DIMENSION (mm)


DA 084

DIMENSION (mm)



IP55

CE



UL94 V-0

-45 +70 °C

Model	Overall dimension	Installation mode	Ventilation interface	Assembly position	Operation/storage temperature	Weight
DA 084	65.5x30.5mm	PG 29 threaded with nuts	~7cm ²	Vertical	-45°C~+70°C	31g

DA 284

DIMENSION (mm)



IP66

CE


UL94 V-0

-35 +70 °C

Model	Overall dimension	Installation mode	Torque	Shell depth	Air permeability	Operation/storage temperature	Weight
DA 284	60x37mm	M40x1.5 threaded with nuts	5Nm (Max.10Nm)	~16mm	1200L/h, 70mbar per minute	-45°C~+70°C	45g

LK 705

DIMENSION (mm)

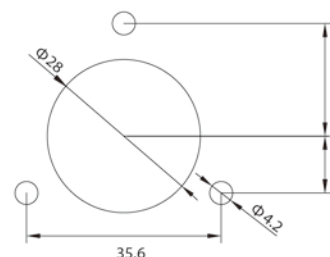

IP54

CE

UL94 V-0

-45 +70 °C

Feature	Unit	Feature
Material	-	Self extinguishing abs
Color	-	Grey (ral7035), black (ral9005)
Fixed	-	Screw with sealing ring
Size	mm	70x50x21
Weight	kg	Zero point zero three