



LKE6025 60x60x25mm

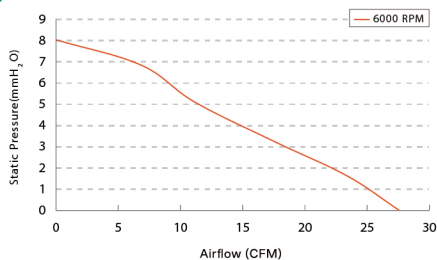

Impeller & Frame: Thermoplastic PBT (UL94 V-0)
Bearing system: Ball or sleeve
Weight: 61.2g


Operation temperature: -30°C~70°C(Ball)
 -10°C~55°C(Sleeve)
Service life: 70000 hours @40°C(Ball)
 30000 hours @40°C(Sleeve)

DIMENSION (mm)

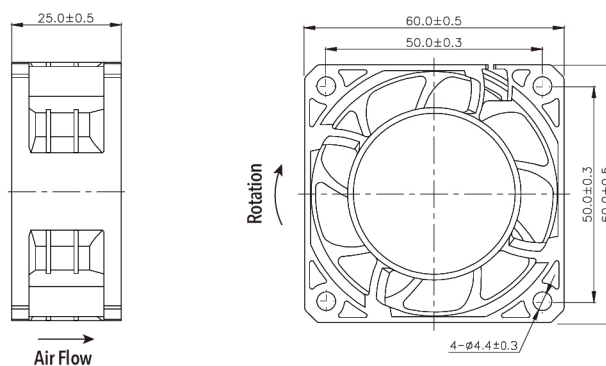

Model	Voltage	Operation Voltage	Frequency	Power	Speed	Maximm Air Flow		Maximum Air Pressure		Noise
	(V)	(VAC)	(Hz)	(W)	(RPM)	(m³/min)	(CFM)	(mmH2O)	(IN H2O)	(dB)
LKE6025M 1/2	110/220	110-240	50/60	4.2	6000	0.78	27.60	8.04	0.32	43.1


LKE8025 80x80x25mm

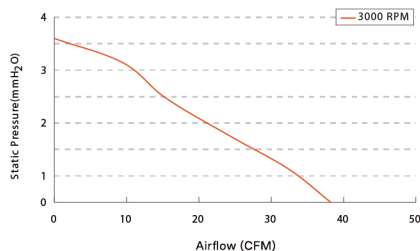

Impeller & Frame: Thermoplastic PBT (UL94 V-0)
Bearing system: Ball or sleeve
Weight: 72g

Operation temperature: -30°C~70°C(Ball)
 -10°C~55°C(Sleeve)
Service life: 70000 hours @40°C(Ball)
 30000 hours @40°C(Sleeve)

DIMENSION (mm)

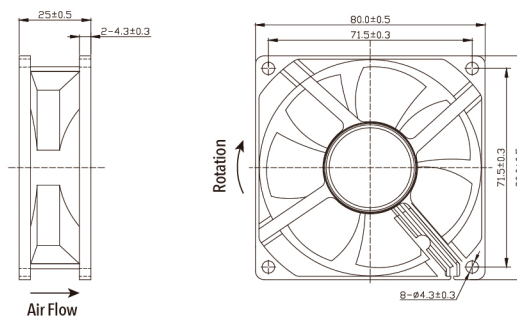

Model	Voltage	Operation Voltage	Frequency	Power	Speed	Maximm Air Flow		Maximum Air Pressure		Noise
	(V)	(VAC)	(Hz)	(W)	(RPM)	(m³/min)	(CFM)	(mmH2O)	(IN H2O)	(dB)
LKE8025M 1/2	110/220	110-240	50/60	4.8	3000	1.08	38.23	3.10	0.12	35.7


80x80x38mm LKE8038
Impeller & Frame: Thermoplastic PBT (UL94 V-0)

Bearing system: Ball bearing


Weight: 177.6g

Operation temperature: -30°C~70°C

Service life: 70000 hours @40°C

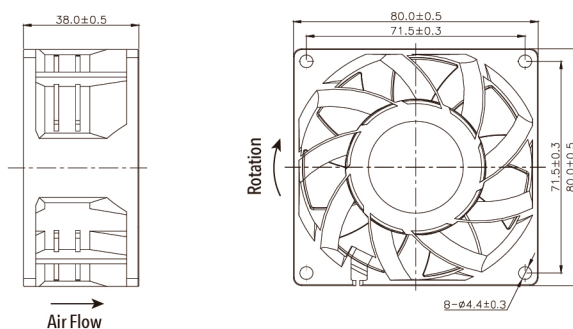DIMENSION (mm)


Model	Voltage	Operation Voltage	Frequency	Power	Speed	Maximm Air Flow		Maximum Air Pressure		Noise
	(V)	(VAC)	(Hz)	(W)	(RPM)	(m³/min)	(CFM)	(mmH₂O)	(IN H₂O)	(dB)
LKE8038M 1/2	110/220	110-240	50/60	12	6000	2.00	70.73	18.04	0.71	56.9

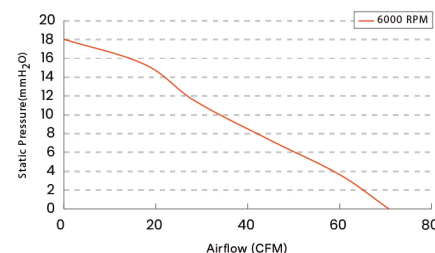
92x92x25mm LKE9225
Impeller & Frame: Thermoplastic PBT (UL94 V-0)

Bearing system: Ball or sleeve


Weight: 102g

Operation temperature: -30°C~70°C(Ball)


-10°C~55°C(Sleeve)

Service life: 70000 hours @40°C(Ball)


30000 hours @40°C(Sleeve)

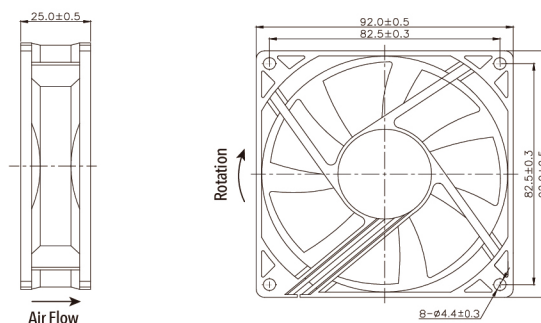DIMENSION (mm)


Model	Voltage	Operation Voltage	Frequency	Power	Speed	Maximm Air Flow		Maximum Air Pressure		Noise
	(V)	(VAC)	(Hz)	(W)	(RPM)	(m³/min)	(CFM)	(mmH₂O)	(IN H₂O)	(dB)
LKE9225M 1/2	110/220	110-240	50/60	4.00	3500	1.51	53.3	4.42	0.17	38.5

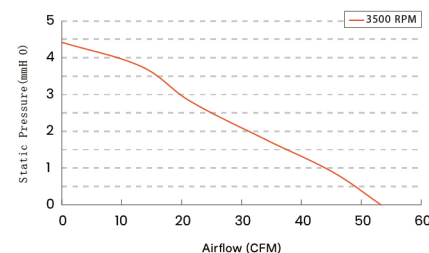


LKE9238 92x92x38mm

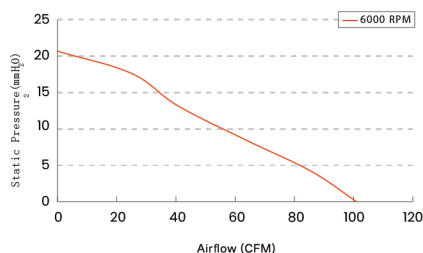

Impeller & Frame: Thermoplastic PBT (UL94 V-0)
Bearing system: Ball bearing
Weight: 202g


Operation temperature: -30°C~70°C
Service life: 70000 hours @40°C

DIMENSION (mm)

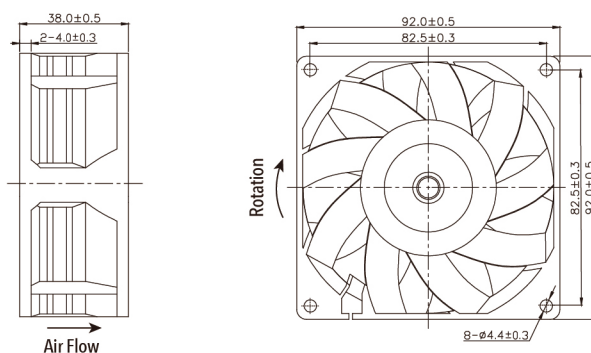

Model	Voltage	Operation Voltage	Frequency	Power	Speed	Maximm Air Flow		Maximum Air Pressure		Noise
	(V)	(VAC)	(Hz)	(W)	(RPM)	(m³/min)	(CFM)	(mmH₂O)	(IN.H₂O)	(dB)
LKE9238M 1/2	110/220	110-240	50/60	12.00	6000	2.86	100.98	20.69	0.81	56.6


LKE12025 120x120x25mm

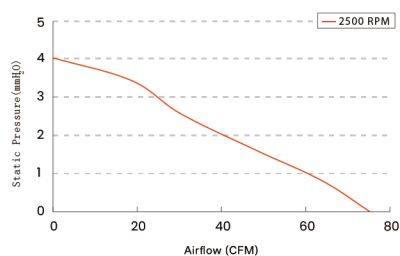

Impeller & Frame: Thermoplastic PBT (UL94 V-0)
Bearing system: Ball or sleeve
Weight: 1213g

Operation temperature: -30°C~70°C(Ball)
-10°C~55°C(Sleeve)
Service life: 70000 hours @40°C(Ball)
30000 hours @40°C(Sleeve)

DIMENSION (mm)

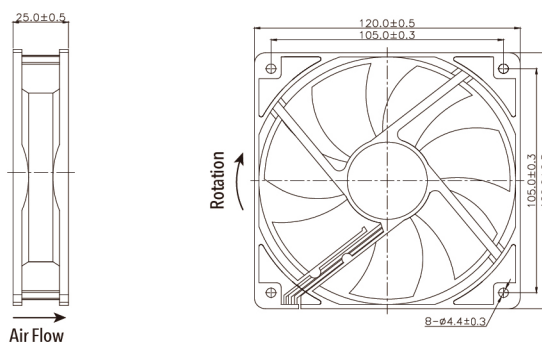

Model	Voltage	Operation Voltage	Frequency	Power	Speed	Maximm Air Flow		Maximum Air Pressure		Noise
	(V)	(VAC)	(Hz)	(W)	(RPM)	(m³/min)	(CFM)	(mmH₂O)	(IN.H₂O)	(dB)
LKE12025M 1/2	110/220	110-240	50/60	4.00	2500	2.13	75.29	4.02	0.16	42.4

120x120x38mm LKE12038-7
Impeller & Frame: Thermoplastic PBT (UL94 V-0)

Bearing system: Ball or sleeve


Weight: 3015g

Operation temperature: -30°C~70°C(Ball)


-10°C~55°C(Sleeve)

Service life: 70000 hours @40°C(Ball)

30000 hours @40°C(Sleeve)

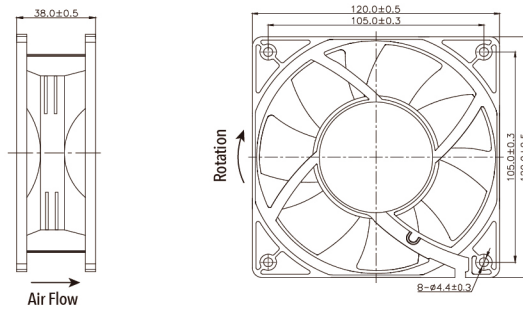DIMENSION (mm)


Model	Voltage	Operation Voltage	Frequency	Power	Speed	Maximm Air Flow		Maximum Air Pressure		Noise
	(V)	(VAC)	(Hz)	(W)	(RPM)	(m³/min)	(CFM)	(mmH₂O)	(IN H₂O)	(dB)
LKE12038L 1/2	110/220	110-240	50/60	5.00	2000	2.16	76.31	3.39	0.13	37.0
LKE12038M 1/2	110/220	110-240	50/60	8.00	3000	3.24	114.47	7.62	0.30	46.7
LKE12038H 1/2	110/220	110-240	50/60	13.00	4000	4.32	152.62	13.54	0.53	53.7

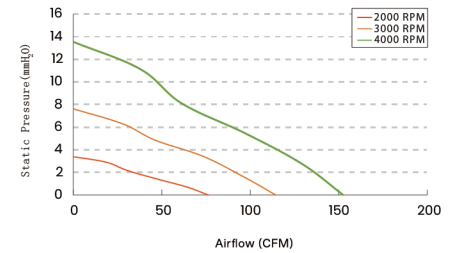
150x150x50mm LKE15050
Bearing system: Ball bearing


Frame: Aluminum ADC-12

Impeller: Thermoplastic PBT (UL94 V-0)


Operation temperature: -30°C~70°C

Service life: 70000 hours @40°C

Weight: 700g

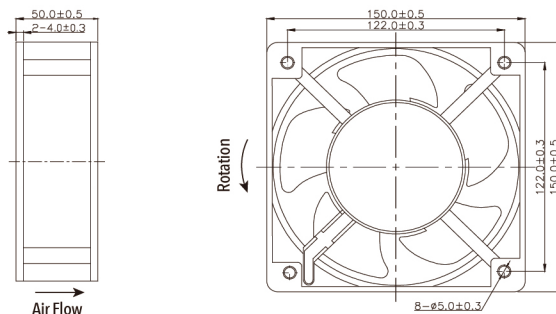DIMENSION (mm)


Model	Voltage	Operation Voltage	Frequency	Power	Speed	Maximm Air Flow		Maximum Air Pressure		Noise
	(V)	(VAC)	(Hz)	(W)	(RPM)	(m³/min)	(CFM)	(mmH₂O)	(IN H₂O)	(dB)
LKE15050M110	110	110-120	50/60	25.00	3500	7.29	257.52	19.60	0.77	60.4
LKE15050M220	220	220-240								

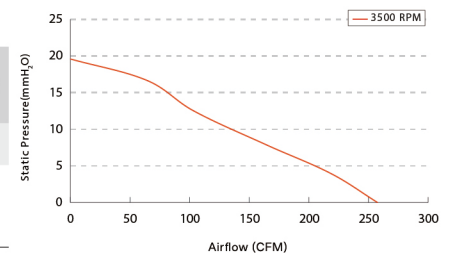




LKE17251-A 172x150x51mm



Bearing system: Ball bearing
Frame: Aluminum ADC-12
Impeller :Thermoplastic PBT (UL94 V-0)

Operation temperature: -30°C~70°C
Service life: 70000 hours @40°C
Weight: 655g

DIMENSION (mm)

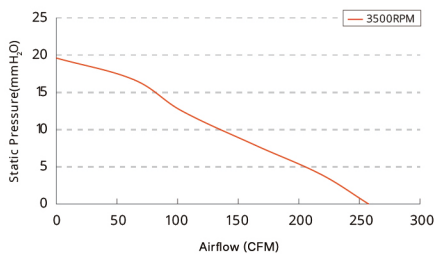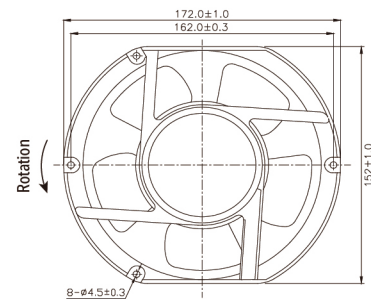

Model	Voltage	Operation Voltage	Frequency	Power	Speed	Maximm Air Flow		Maximum Air Pressure		Noise
	(V)	(VAC)	(Hz)	(W)	(RPM)	(m³/min)	(CFM)	(mmH2O)	(INH ₂ O)	(dB)
LKE17251-A	110	110-120	50/60	25	3500	7.29	257.52	19.60	0.77	60.4
	220	220-240								



LKE20060 200x200x60mm



Bearing system: Ball bearing
Frame: Aluminum ADC-12
Impeller :Thermoplastic PBT (UL94 V-0)

Operation temperature: -30°C~70°C
Service life: 70000 hours @40°C
Weight: 1038g

DIMENSION (mm)

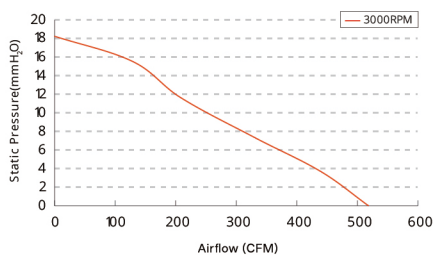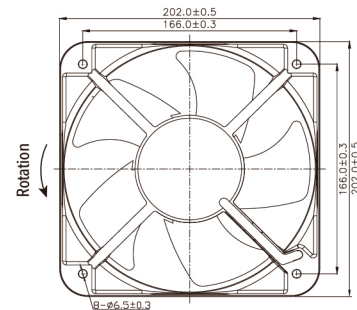

Model	Voltage	Operation Voltage	Frequency	Power	Speed	Maximm Air Flow		Maximum Air Pressure		Noise
	(V)	(VAC)	(Hz)	(W)	(RPM)	(m³/min)	(CFM)	(mmH2O)	(INH ₂ O)	(dB)
LKE20060M110	110	110-120	50/60	40	3000	14.67	518.41	18.24	0.72	62.9
LKE20060M220	220	220-240								

205x205x72mm LKE20572
Bearing system: Ball bearing



Impeller & Frame: Thermoplastic PBT (UL94 V-0)

Insulation level: Class B

Operation temperature: -20°C~85°C

Service life: 40000 hours @40°C

Weight: 1880g

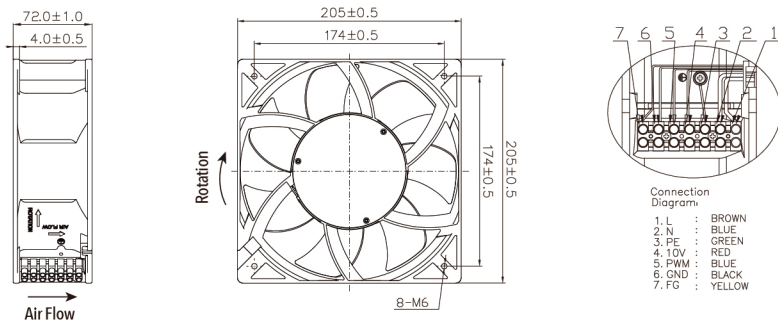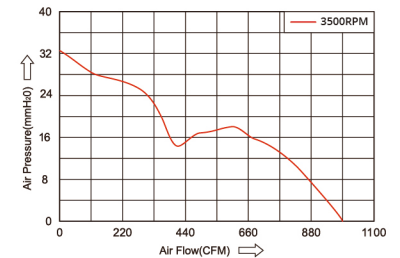DIMENSION (mm)

IP54
CE
RoHS
COMPLIANT


Model	Rated Voltage	Rated Current	Frequency	Operation Voltage	Power	Speed	Air Pressure	Air Volume	Noise
	(V)	(A)	(Hz)	(VAC)	(W)	(RPM)	(mmH ₂ O)	(CFM)	(dB)
LKE20572HB	220	1.10	50/60	165-265	150	3500	32.5	985	73.2

220x220x60mm LKE22060
Bearing system: Ball bearing



Frame: Aluminum ADC-12

Impeller : Thermoplastic PBT (UL94 V-0)

Operation temperature: -30°C~70°C

Service life: 70000 hours @40°C

Weight: 1038g

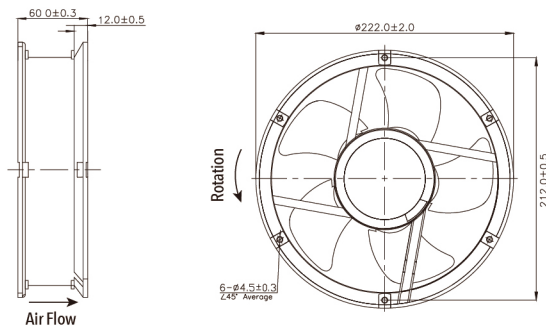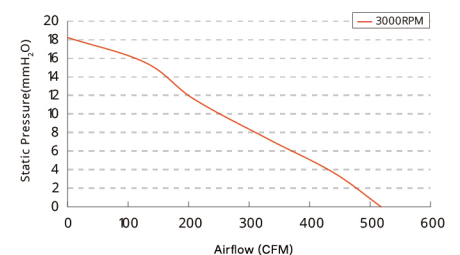DIMENSION (mm)

CE
RoHS
COMPLIANT


Model	Voltage	Operation Voltage	Frequency	Power	Speed	Maximm Air Flow	Maximum Air Pressure	Noise
	(V)	(VAC)	(Hz)	(W)	(RPM)	(m ³ /min) (CFM)	(mmH ₂ O) (INH ₂ O)	(dB)
LKE22060M110	110	110-120	50/60	40	3000	14.67 518.41	18.24 0.72	62.9
LKE22060M220	220	220-240						

LKE22580 225x225x80mm







IP44



Bearing system: Ball bearing
Impeller : Thermoplastic PBT (UL94 V-0)
Fname: Aluminum alloy

Operation temperature: -20°C~85°C
Service life: 40000 hours @40°C
Weight: 2000g

DIMENSION (mm)

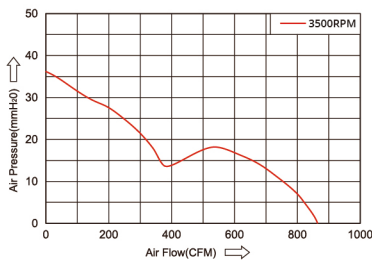

Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE22580HB	220	0.7	50/60	165-265	108	3500	36	863	68

LKE28080 280x280x80mm







IP54



Bearing system: Ball bearing
Impeller : Thermoplastic PBT (UL94 V-0)
Fname: Aluminum alloy

Operation temperature: -10°C~65°C
Service life: 40000 hours @40°C
Weight: 2400g

DIMENSION (mm)

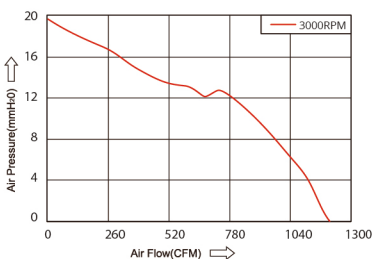

Model	Rated Voltage (V)	Rated Current (A)	Frequency (Hz)	Operation Voltage (VAC)	Power (W)	Speed (RPM)	Air Pressure (mmH ₂ O)	Air Volume (CFM)	Noise (dB)
LKE28080HB	220	0.82	50/60	165-265	116	3000	19.6	1214	70