


# VF752

## Quick start Guid


---



# 1. Appearance introduction

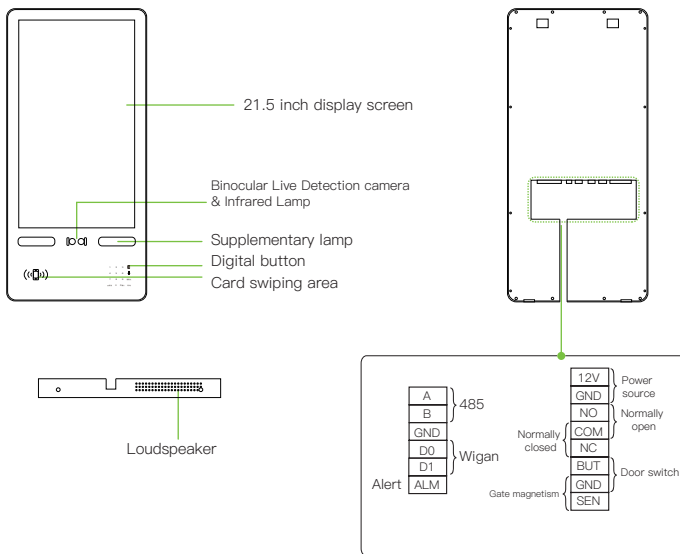


# 2. Equipment installation

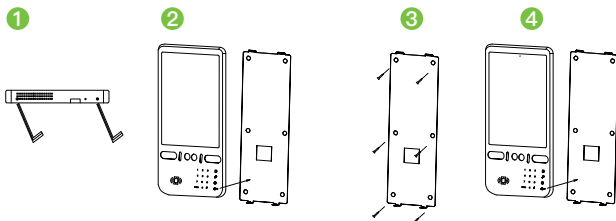


Please insert the cable into the terminal before installation.

- 1) remove the anti-disassembly screw with the four-corner screw and remove the hanging plate.
- 2) attach the hanging board to the wall and drill holes, and fix the hanging board to the wall with screws.
- 3) hang the equipment on the installed hanging board and insert the anti-disassembly screw.

### 3. Schematic diagram of access control system

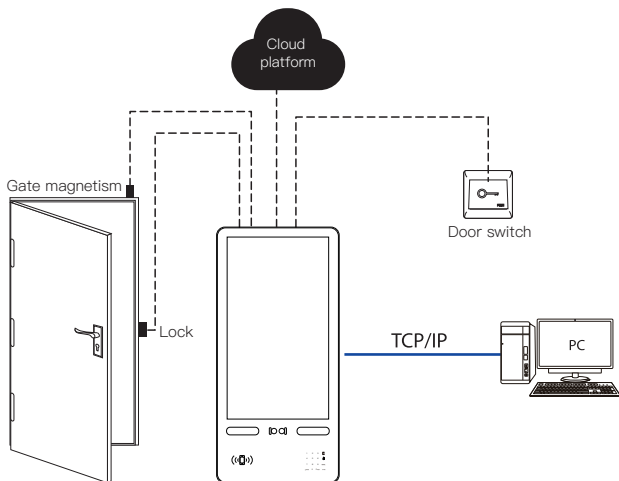


### 4. Connect door magnetic, door switch

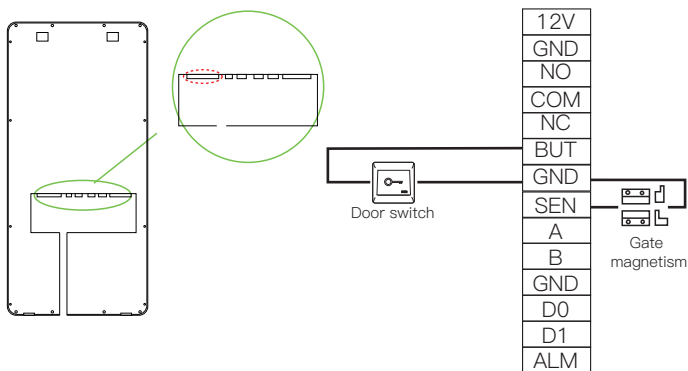


## 5. Connecting door lock

This equipment can support normally open and normally closed locks. NO terminals should be used for locks that are opened when power is on and closed when power is off, and NC terminals should be used for locks that are closed when power is on or opened when power is off.

### 1) Power-on lock

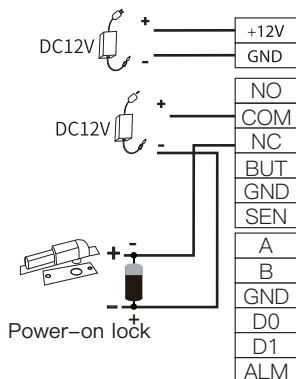

### 2) The lock is often unlocked when electrified.

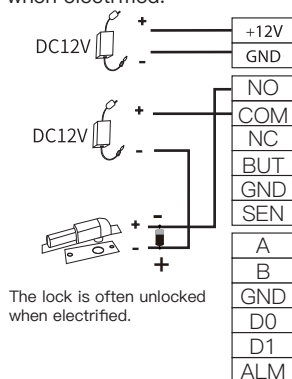


## 6. View system information


Press the “#” key, enter the administrative password “115200”, press “#” to confirm, enter the device management interface, and press “1 #” to view the system information.




## 7.Add device (background)

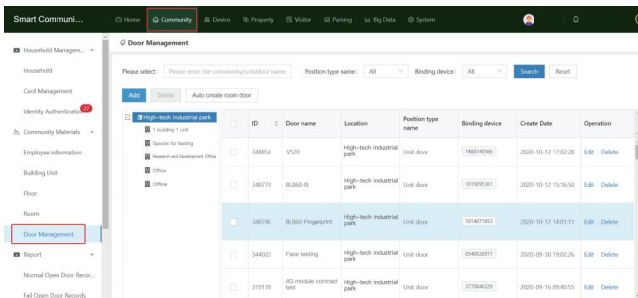

(1)

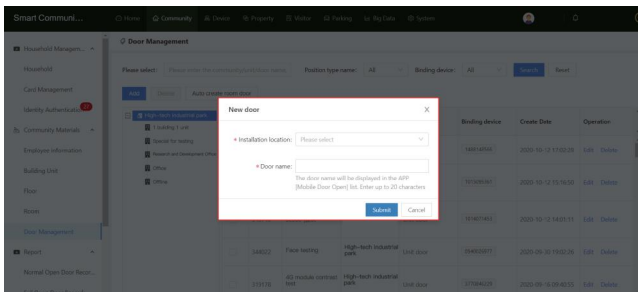

(2)

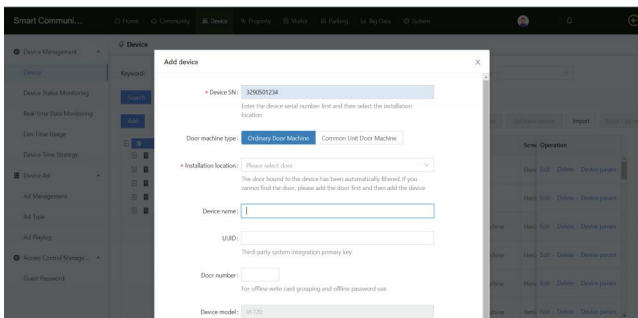

(3)

1. Click "Community"—"door Management", as shown in figure (1).
2. Click "add" to fill in the relevant information about the door. "installation location" can select "Community, Unit, Room" to create the door. The door number is used to write the card, and click "submit", as shown in figure (2).
3. Click "equipment"—"add" to fill in the equipment-related information, and click "submit", as shown in figure (3).

Note: two door machines are not allowed to be installed at the same door (installation location). When adding a door machine, the corresponding user information, user face, card, management machine, indoor machine, house, property, advertisement, announcement, visitors and other data will be added to the device.

## 8. Online, offline (background)

Click "Equipment"—"Equipment Status Monitoring" to view the online and offline status of the equipment.

Smart Communi... Home Community **Device** Property Visitor Parking Big Data System

Device Management

Device

Device Status Monitoring

Real-time Data Monitoring

Dev Time Usage

Device Time Strategy

Device Add

Ad Management

Ad Type

Ad Playlog

Access Control Manage...

Guest Password

Device Status Monitoring

Total devices 66 Online device 11 Offline device 51 No Internet 4

| Device name                    | Device model                   | Installation location                  | Status  | Version               | IP Address     | Last connection time | Commands Count | Commands Result | Operation                |
|--------------------------------|--------------------------------|----------------------------------------|---------|-----------------------|----------------|----------------------|----------------|-----------------|--------------------------|
| 17(281531294)                  | 17(281531294)                  | Open for testing/17(17)                | Offline |                       | 192.168.22.17  |                      | 455            | Add Command     | Cancel Command   Details |
| 194186053789194186053789       | 194186053789194186053789       | Open for testing/Access control device | Offline |                       |                |                      | 1490           | Add Command     | Cancel Command   Details |
| 1941862629919418626299         | 1941862629919418626299         | Unit 1 / open door / building          | Offline |                       |                |                      | 1300           | Add Command     | Cancel Command   Details |
| 19493340401949334040           | 19493340401949334040           | Open for testing/1949334040            | Offline |                       | 192.168.10.89  |                      | 233            | Add Command     | Cancel Command   Details |
| 19578311961957831196           | 19578311961957831196           | Open for testing/1957831196            | Offline |                       | 192.168.16.107 |                      | 290            | Add Command     | Cancel Command   Details |
| 219329406219329406219329406    | 219329406219329406219329406    | 1 building 1 unit/door main entrance   | Offline | 2.19.23.20041516(100) | 192.168.10.57  | 2020/11/18 18:17:42  | 1135           | OK              | Cancel Command   Details |
| 219331700721933170072193317007 | 219331700721933170072193317007 | 1 building 1 unit/door main entrance   | Offline |                       |                |                      | 232            | Add Command     | Cancel Command   Details |

### Offline status

Smart Communi... Home Community **Device** Property Visitor Parking Big Data System

Device Management

Device

Device Status Monitoring

Real-time Data Monitoring

Dev Time Usage

Device Time Strategy

Device Add

Ad Management

Ad Type

Ad Playlog

Access Control Manage...

Guest Password


Device Status Monitoring

Total devices 66 Online device 11 Offline device 51 No Internet 4

| Device name                      | Device model                     | Installation location                                                                                                | Status  | Version               | IP Address    | Last connection time | Commands Count | Commands Result | Operation                |
|----------------------------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------|---------|-----------------------|---------------|----------------------|----------------|-----------------|--------------------------|
| Personal office/2205210584       | Personal office/2205210584       | Personal office                                                                                                      | Offline | 101                   | 121.35.2.186  | 2020/10/20 17:02:38  | 0              |                 | Cancel Command   Details |
| Guru 15521488148800              | Guru 15521488148800              | Guru 15521488148800                                                                                                  | Offline | WOL 4.0               | 167.3.110.171 | 2020/10/20 17:05:11  | 0              | OK              | Cancel Command   Details |
| Conference Room 1 (2205210714)   | Conference Room 1 (2205210714)   | Conference Room 1                                                                                                    | Offline | 104                   | 121.35.2.186  | 2020/10/20 17:05:54  | 0              |                 | Cancel Command   Details |
| Conference Room 2 (1949334040)   | Conference Room 2 (1949334040)   | Conference Room 2                                                                                                    | Offline | 110                   | 121.35.2.186  | 2020/10/20 17:02:40  | 462            |                 | Cancel Command   Details |
| Customer equipment/2205205920    | Customer equipment/2205205920    | Unit 1 / 2205205920                                                                                                  | Offline |                       |               |                      | 419            | Add Command     | Cancel Command   Details |
| Unit 1/2205205920                | Unit 1/2205205920                | Offline device 1                                                                                                     | Offline |                       |               |                      | 0              | OK              | Cancel Command   Details |
| Access control 1193194186053789  | Access control 1193194186053789  | 1 building 1 unit / 1193194186053789<br>1 building 1 unit / 1193194186053789<br>1 building 1 unit / 1193194186053789 | Offline |                       |               |                      | 1535           | Add Command     | Cancel Command   Details |
| Gate gate-out/219329406219329406 | Gate gate-out/219329406219329406 | Gate gate-out                                                                                                        | Offline |                       | 192.168.2.13  |                      | 436            | Add Command     | Cancel Command   Details |
| Entrance gate-entry/2200514050   | Entrance gate-entry/2200514050   | Entrance gate-entry                                                                                                  | Offline | 2.19.23.20072713(100) | 192.168.22.7  | 2020/10/20 17:05:59  | 0              | OK              | Cancel Command   Details |

### Online status

## 9. Online, offline (device side)

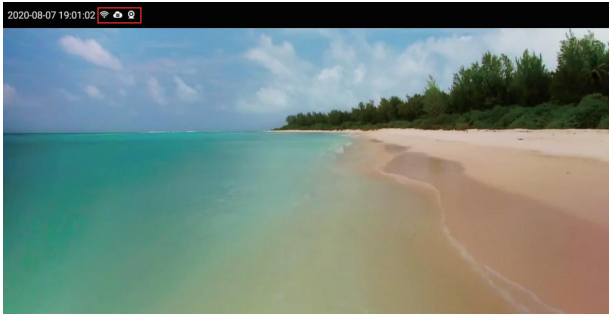

Online statu

When the WIFI icon or 4G icon is displayed in the upper left corner and the icon is white, the device is online



Offline state

When the "prohibit" icon appears in the upper left corner and the icon is red, the device is offline.

## 10. Check the opening record

Smart Community Cloud... Home Community Device Property Visitor Parking Le. Bg Data System

Household Management

- Household
- Card Management
- Identity Authentication
- Community Materials
- Employee information
- Building Unit
- Floor
- Room
- Door Management
- Report
  - Normal Open Door Records
  - Fail Open Door Records
  - Call Room Records

Normal Open Door Records

Keyword: Device SN: Name: All Open door type: All

Identity type: All Recent Time: One Week One Month Time: Start Time End Time

Search Reset

Delete Export exportCaptureImage

| Open door time      | Name           | Device name                         | Event Points           | Open Door Type                 | Face Recognition Data                     | Capture |
|---------------------|----------------|-------------------------------------|------------------------|--------------------------------|-------------------------------------------|---------|
| 2020-10-20 17:05:25 | Ouqing Yongji  | Entrance gate-access (2205051400)   | Entrance gate-access   | Face recognition open door     | Match score: 92   Body temperature: 36.40 |         |
| 2020-10-20 16:57:32 | Zhang Hongqian | Chief Manager's Office (2205051400) | Chief Manager's Office | Open the door remotely(A PP)   | None                                      |         |
| 2020-10-20 16:56:19 | Zhang Hongqian | Entrance gate-access (2205051400)   | Entrance gate-access   | Face recognition open door     | Match score: 93   Body temperature: 36.40 |         |
| 2020-10-20 16:20:17 | Wu Gengwei     | Gate1 (60148050)                    | Gate V120              | Normal card opening(799162883) | None                                      |         |
| 2020-10-20 16:19:56 | Wu Gengwei     | Gate1 (60148050)                    | Gate V120              | Normal card opening(799162883) | None                                      |         |

- Click "Community"—"normal opening record" to view the normal opening record.
- Click "Community"—"Open door failure record" to view the failed opening record.
- Click "Community"—"call Room record" to view the call room record.
- Click "Community"—"face Detection record" to view the record of opening the door through the face.

## 11. Face add (background)

Smart Community Cloud... Home Community Device Property Visitor Parking Le. Bg Data System

Household Management

- Household
- Card Management
- Identity Authentication
- Community Materials
- Employee information
- Building Unit
- Floor
- Room
- Door Management
- Access Report
  - Normal Open Door Records
  - Fail Open Door Records
  - Call Room Records
  - Face Test Records
  - Face Registration Record

Household

Keyword: Please enter the household name Gender: All Is have face

Last opening time: All Search Reset Read card number

Add Import Export Import Image exportImage

| ID       | Name  | Gender |
|----------|-------|--------|
| 13028112 | Huang |        |
| 13416408 | Zhen  |        |
| 13339504 | Wang  |        |
| 13107470 | Yan   |        |
| 13034034 | Huo   |        |

New household

Card Management

- Add card number
- Support multiple cards for one person
- Get card number from card reader Click the Add card number button, and then put the physical card on the card reader device, it will automatically get the card number into the list
- Reminder: If there is an offline device, please save the personal information before performing the offline card writing operation in the list

Fingerprint Management

- Add Fingerprint

Room Management


- No data
- Support for one person with multiple rooms
- After adding a house, the occupants will automatically have all access rights to all the gates of the community and the building unit where the current house is located, without the need for independent authorization

Access authority

- No data
- Disable access control


Save Cancel

1. Click "Community"—"Household"—"add", fill in household information, click "Browse", you can upload local photos of your computer, and click "Snapshot" to take pictures on camera.

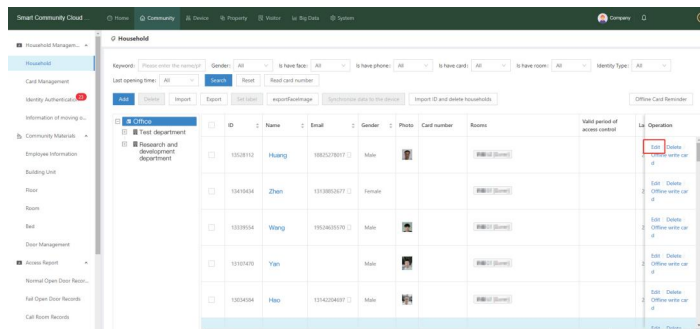


2. If you want to input information, you can click "Edit" to upload faces.

## 12.Face addition (APP)

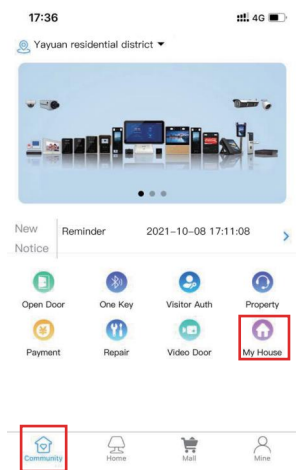

(1)

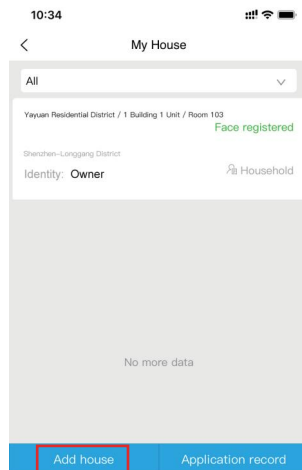

(2)

17:33 4G

< Authentication

All

|            |                             |   |
|------------|-----------------------------|---|
| *City      | Shenzhen                    | > |
| *Community | Yayuan residential district | > |
| *Building  | 1 building 1 unit           | > |
| *Room      | 103                         | > |

Next step

17:36

4G

Authentication



Register face

\*Identity

Owner

\*Full name

Han Hui

\*Gender

Female

Certificate

ID card

ID number

XXXXXXXXXXXX

Adding a house requires a property review, you can check the review status in the application record

Submit

1. Click "Community"—"my House", as shown in figure (1).
2. Click "add House", as shown in figure (2).
3. Fill in the community information, as shown in figure (3).
4. Fill in the household information and upload the face, and click "submit", as shown in figure (4). After the background examination and approval, you can open the door to the face.

10:34

My House

All

Yueyan Residential District / 1 Building 1 Unit / Room 103

Shaozhen-Langyong District

Identity: Owner

Household

Face registered

Yueyan Residential District / 2 Building 3 Unit / Room 105

Shaozhen-Langyong District

Identity: Owner

Household

Register face

No more data

Add house

Application record


**Face photo**

**Face data entry requirements**

- The background light of the photo is bright, uniform and moderate to avoid the phenomenon of too bright and too dark.
- Hair should not cover the forehead and the front of the face.
- The expression is natural and can not be distorted, so as not to affect the results.
- Photos should not have excessive beauty function.
- The best photo to allow the scanner (senior certificate photo).
- Only one person can exist in the photo, and the angle of the photo is the same as that of the person standing.


Note: if the household information has been completed, you can upload and replace face photos in "Community"—"my House"—"Register face".

## 13.Face deletion (background)

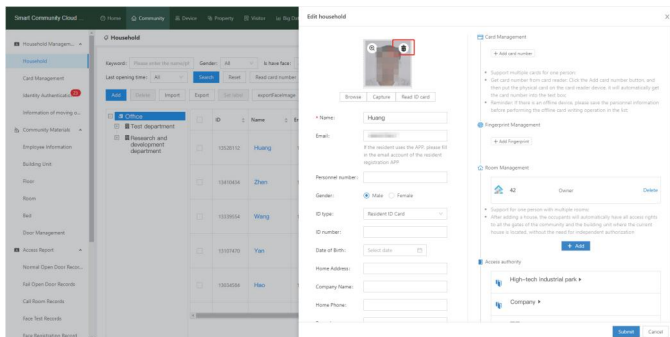

Click "Community"—"Household"—"add", click the face photo to appear the "delete" icon, click the icon to delete the face photo.


## 14.Face deletion (APP)

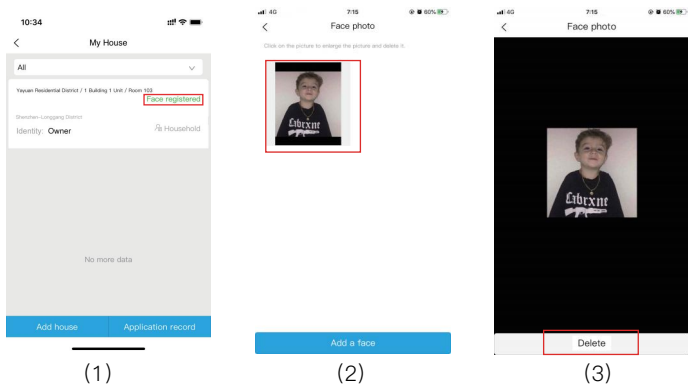


As shown in figure (1), click "my"—"my House"—"face has been registered" and the interface shown in figure (2) appears. Click on the picture to enlarge and delete the face, as shown in figure (3).

## 14.附录

### 产品外观展示

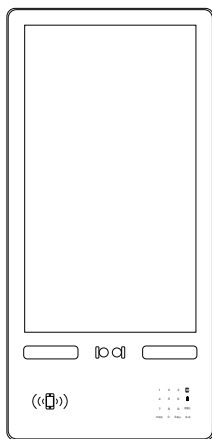

正面

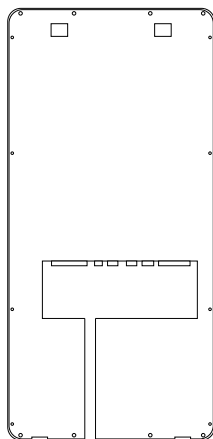

背面

\* 本公司保留最终更改权和解释权。

