


VF700–VQ


Quick Start Guid



1. Appearance Introduction

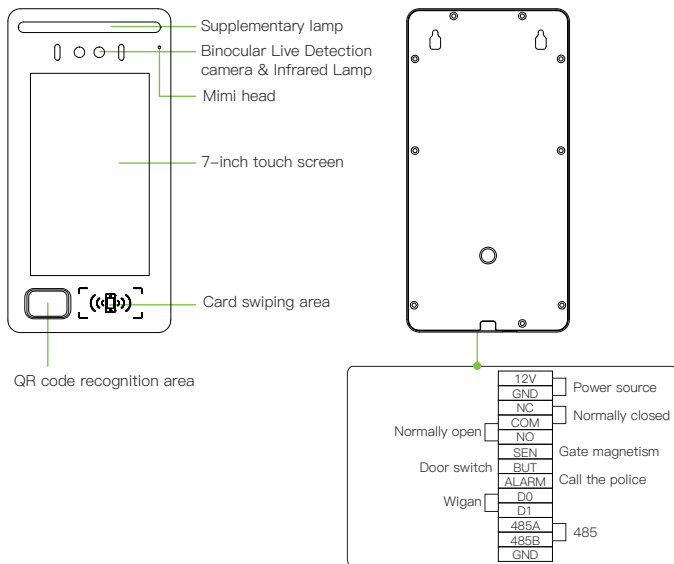


2. Equipment Installation

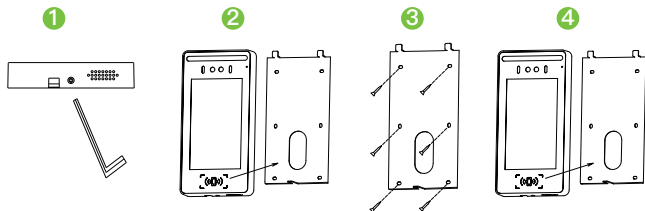


- 1) Remove the anti-disassembly screw with the four-corner screw.
- 2) Remove the hanging board, attach it to the wall and drill a hole.
- 3) Fix the hanging board to the wall with screws, and connect the power cord, network cable, etc., through the hole.
- 4) Hang the equipment on the installed hanging board and insert the anti-disassembly screw.

3. Schematic Diagram of Access Control System

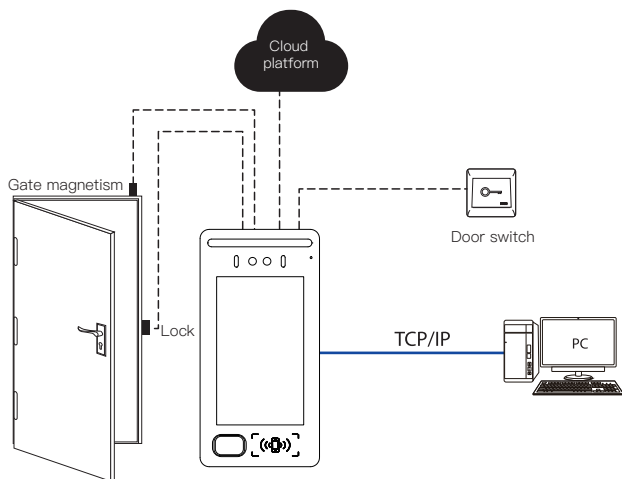


4. Connect Door Sensor and Exit Switch

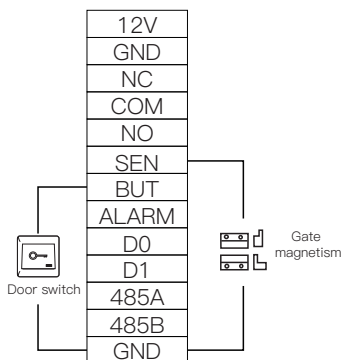


5. Connecting Door Lock

This equipment can support normally open and normally closed locks. NO terminals should be used for locks that are opened when power is on and closed when power is off, and NC terminals should be used for locks that are closed when power is on or opened when power is off.

1) Power-on lock

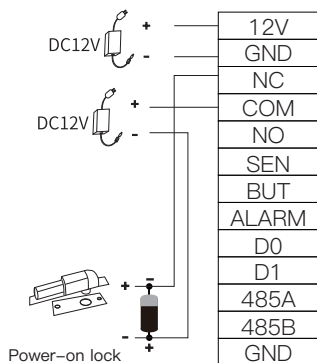

2) The lock is often unlocked when electrified.

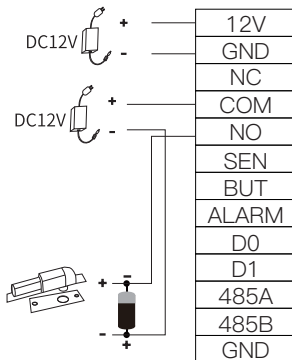

6. View System Information

After entering the device interface, press the "password" button, then press the "Settings" button, enter the administrative password "115200" and press the "confirm" button to view the system information.

 Equipment >

 Sound

 Test

 Restart

Device Typ: VF700V

Ip address: 192.168.1.132

Version number: V0.9.9.0

Serial number: V3291632662

DNS: 192.168.1.1

Gateway address: 192.168.1.1


Server address: 106.52.94.106:8169

Total number of faces: 150

Number of registered successful faces: 120

7.Call Room Number

After entering the device interface, press the "Dial" button to enter the call interface. If it is a community door, you need to enter the unit number + room number, and press the "Dial" button to make a call. After the call is over, press "Hang up". Press the button to end the call; if it is a unit door, just enter the room number and press the "Dial" button to start the call. After the call is over, press the "Hang up" button to end the call.

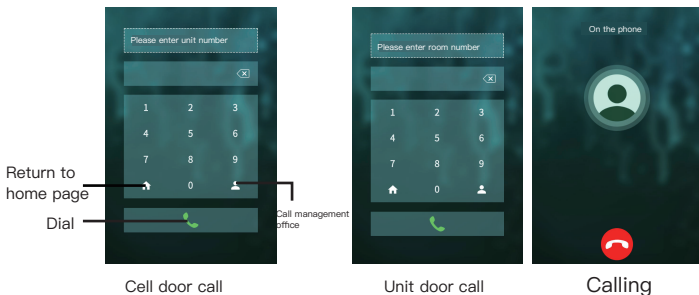

8.Check the Opening Record

Smart Communi... Home Community Device Property Visitor Parking Big Data System

Household Management

Household

Card Management

Identity Authentication

Community Materials

Employee Information

Building Unit

Floor

Room

Door Management

Report

Normal Open Door Record

Fail Open Door Records

Call Room Records

Normal Open Door Records

Keyword: Device SN: Name: All Open door type: All

Identity type: All Recent Time: One Week One Month Time: Start Time End Time

Search Reset

Delete Export exportCaptureImage

	Open door time	Name	Device name	Event Points	Open Door Type	Face Recognition Data	Capture
☐	2020-10-20 17:05:25	Quang Yongli	Entrance gate-access (2205051-405)	Entrance gate-access	Face recognition open door	Match score: 92 Body Temperature: 36.40	
☐	2020-10-20 16:57:32	Zhang Hongqian	Chair Manager's Office (2205054-005)	Chair Manager's Office	Open the door remotely(AIR)	None	
☒	2020-10-20 16:56:19	Zhang Hongqian	Entrance gate-access (2205051-405)	Entrance gate-access	Face recognition open door	Match score: 93 Body Temperature: 36.40	
☐	2020-10-20 16:20:37	Wu Qingmei	Gate(1-4881-48808)	Gate V520	Normal card opening(799162083)	None	
☐	2020-10-20 16:19:56	Wu Qingmei	Gate(1-4881-48808)	Gate V520	Normal card opening(799162083)	None	

Click "Community"—"normal opening record" to view the normal opening record.

Click "Community"—"Open door failure record" to view the failed opening record.

Click "Community"—"call Room record" to view the call room record.

Click "Community"—"face Detection record" to view the record of opening the door through the face.

9.Add Device (Background)

Smart Communi... Home Community Device Property Visitor Parking Set Up Data System

Household Management Household Card Management Identity Authentication Community Materials Employee Information Building Unit Floor Room **Door Management** Report

Normal Open Door Records Fall Open Door Records

Door Management

Please select: Please enter the community/unit/door name. Position type name: All Binding device: All Search Reset

Add Delete Auto create room door

ID	Door name	Location	Position type name	Binding device	Create Date	Operation
348854	V530	High-tech industrial park	Unit door	1488142366	2020-10-12 17:02:26	Edit Delete
348774	BL360-4	High-tech industrial park	Unit door	1015095361	2020-10-12 15:16:50	Edit Delete
348740	BL360 Fingerprint	High-tech industrial park	Unit door	1014071403	2020-10-12 14:01:11	Edit Delete
344002	Face testing	High-tech industrial park	Unit door	0540328977	2020-09-30 19:02:26	Edit Delete
319178	4G module contract test	High-tech industrial park	Unit door	3770846228	2020-09-16 09:40:55	Edit Delete

(1)

Smart Communi... Home Community Device Property Visitor Parking Set Up Data System

Household Management Household Card Management Identity Authentication Community Materials Employee Information Building Unit Floor Room **Door Management** Report

Normal Open Door Records Fall Open Door Records

Door Management

Please select: Please enter the community/unit/door name. Position type name: All Binding device: All Search Reset

Add Delete Auto create room door

New door


Installation location: Please select

Door name: The door name will be displayed in the APP (Mobile Door Open) list. Enter up to 20 characters

Submit Cancel

ID	Door name	Location	Position type name	Binding device	Create Date	Operation
348854	V530	High-tech industrial park	Unit door	1488142366	2020-10-12 17:02:26	Edit Delete
348774	BL360-4	High-tech industrial park	Unit door	1015095361	2020-10-12 15:16:50	Edit Delete
348740	BL360 Fingerprint	High-tech industrial park	Unit door	1014071403	2020-10-12 14:01:11	Edit Delete
344002	Face testing	High-tech industrial park	Unit door	0540328977	2020-09-30 19:02:26	Edit Delete
319178	4G module contract test	High-tech industrial park	Unit door	3770846228	2020-09-16 09:40:55	Edit Delete

(2)

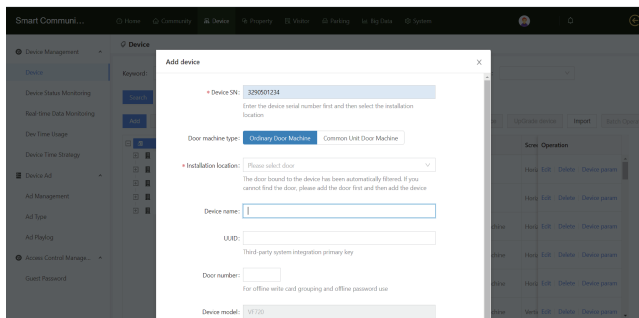

(3)

1. Click "Community"—"door Management", as shown in figure (1).
2. Click "add" to fill in the relevant information about the door. "installation location" can select "Community, Unit, Room" to create the door. The door number is used to write the card, and click "submit", as shown in figure (2).
3. Click "equipment"—"add" to fill in the equipment—related information, and click "submit", as shown in figure (3).

Note: two door machines are not allowed to be installed at the same door (installation location). When adding a door machine, the corresponding user information, user face, card, management machine, indoor machine, house, property, advertisement, announcement, visitors and other data will be added to the device.

10.Online, Offline (Background)

Click "Equipment"—"Equipment Status Monitoring"to view the online and offline status of the equipment.


Smart Communi...									
Home Community Device Property Visitor Parking Big Data System									
Device Status Monitoring									
Total devices 66 Online device 11 Offline device 51 No internet 4									
Device name	Device model	Installation location	Status	Version	IP Address	Last connection time	Commands Count	Commands Result	Operation
173251531294	V8100	Special for testing/1717	Offline		192.168.22.17		485	Add Command	Cancel Command Details
194186653739(194186653739)	The access controller	Special for testing/Access controller	Offline				1490	Add Command	Cancel Command Details
194186526299(194186526299)	The access controller	Unit 1 / 2nd floor of 1 building	Offline				1300	Add Command	Cancel Command Details
1949384849(1949384849)	V500	Special for testing/500	Offline		192.168.10.89		253	Add Command	Cancel Command Details
1957841116(1957841116)	VF720	Special for testing/VF720-1	Offline		192.168.14.107		290	Add Command	Cancel Command Details
2358329404(2358329404)	VF720	1 building / 1 unit/floor room VF720	Offline	2.19.23.20041516(108)	192.168.10.57	20200419183742	1335	OK	Cancel Command Details
2358357002(2358357002)	M362	1 building / 1 unit/floor room M362	Offline				252	Add Command	Cancel Command Details

Offline status

Smart Communi...									
Home Community Device Property Visitor Parking Big Data System									
Device Status Monitoring									
Total devices 66 Online device 11 Offline device 51 No internet 4									
Device name	Device model	Installation location	Status	Version	IP Address	Last connection time	Commands Count	Commands Result	Operation
Financial office(2358310484)	M300	Financial office	Offline		121.35.2.186	20201020170238	0		Cancel Command Details
Gate V502(148144566)	A520	Gate V502	Offline	V0.7.4.0	10.73.110.171	20201020170511	0	OK	Cancel Command Details
Conference Room1(2358370718)	M300	Conference Room1	Offline		104	121.35.2.186	20201020170554	0	Cancel Command Details
Conference Room2(1949388912)	C300	Conference Room2	Offline		110	121.35.2.186	20201020170340	462	Cancel Command Details
Customer equipment(2358355970)	M500	Unit 1 / M500-1	Offline				419	Add Command	Cancel Command Details
Bole L441(23591984)	C100	Offline device L1	No internet				0	OK	Cancel Command Details
Access control 119(19438108119)	Access control	1 building / 1 unit / 119 floor 1 1 building / 1 unit / 119 floor 2 1 building / 1 unit / 119 floor 3 1 building / 1 unit / 119 floor 4	Offline				1535	Add Command	Cancel Command Details
Gate gate-e48(2358308170)	VF618-T	Gate gate-e48	Offline		192.168.2.13		436	Add Command	Cancel Command Details
Entrance gate-e49(235831408)	VF618-T	Entrance gate-e49	Offline	2.19.23.20072715(108)	192.168.22.7	20201020170559	0	OK	Cancel Command Details


Online status

11.Online, Offline (Device Side)

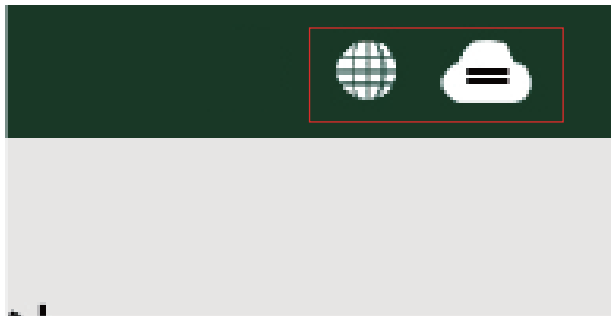

Online statu


When an Ethernet icon and a cloud platform are displayed in the upper left corner and the icon is white, the device is online

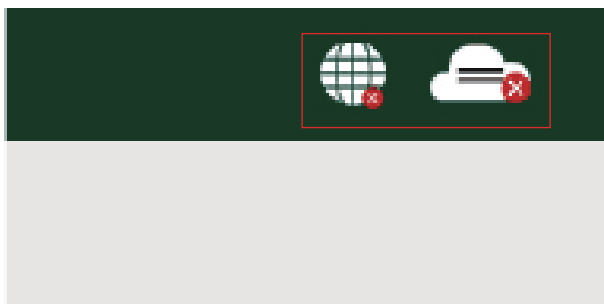


Offline state

When the "prohibit" icon appears in the upper left corner, the device is offline.

12.Face Add (Background)

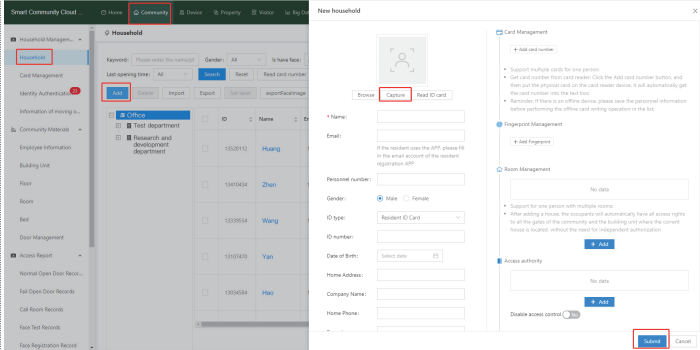


1. Click "Community"—"Household"—"add", fill in household information, click "Browse", you can upload local photos of your computer, and click "Snapshot" to take pictures on camera.


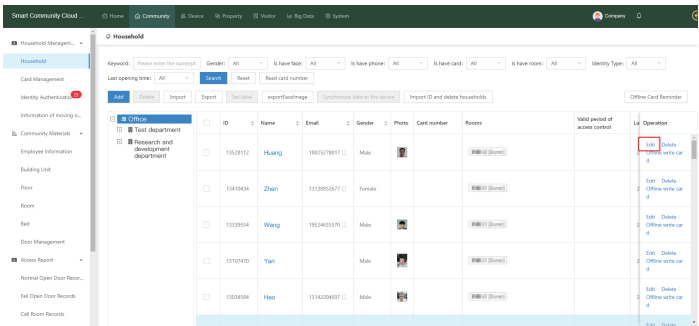


2. If you want to input information, you can click "Edit" to upload faces.


13.Face Addition (APP)

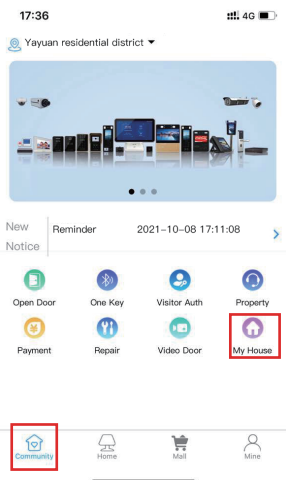


(1)

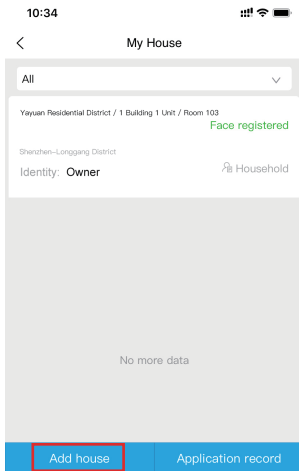

(2)

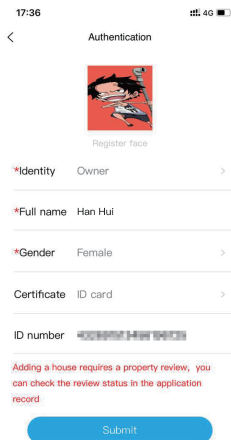


1. Click "Community"—"my House", as shown in figure (1).
2. Click "add House", as shown in figure (2).
3. Fill in the community information, as shown in figure (3).
4. Fill in the household information and upload the face, and click "submit", as shown in figure (4). After the background examination and approval, you can open the door to the face.

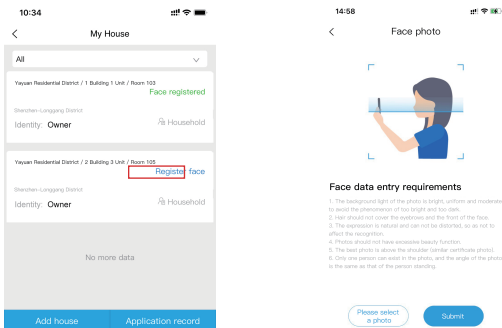


Note: if the household information has been completed, you can upload and replace face photos in "Community"—"my House"—"Register face".

13.Face Deletion (Background)

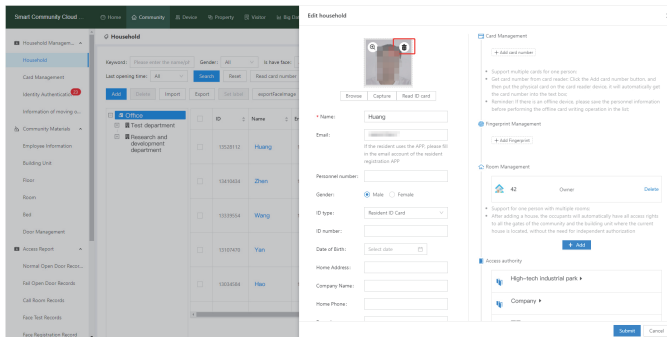

Click "Community"—"Household"—"add", click the face photo to appear the "delete" icon, click the icon to delete the face photo.


15.Face Deletion (APP)

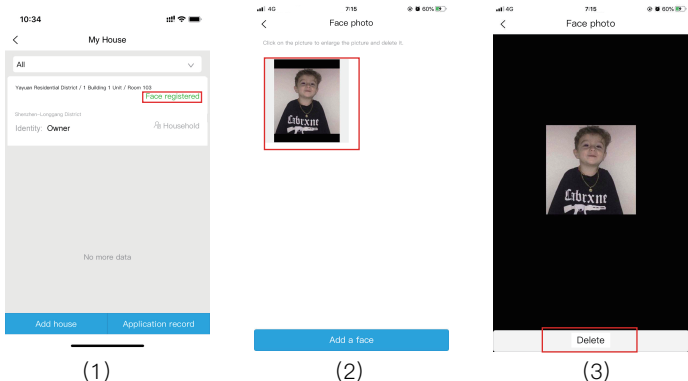


As shown in figure (1), click "my"—"my House"—"face has been registered" and the interface shown in figure (2) appears. Click on the picture to enlarge and delete the face, as shown in figure (3).

16.Appendix

Product appearance display



Front



Back

