




M237-WF

Quick Installation Guide

1.Appearance

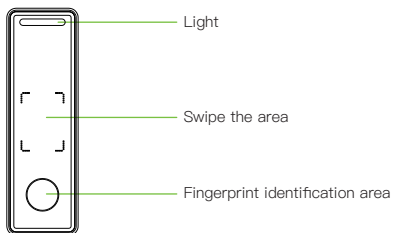


2.Equipment installation


1




2



3




4




- 1) Use a screwdriver to remove the anti-disassembly screw and remove the hanging plate;
- 2) Attach the hanging plate and rain cover to the wall and drill holes, and fix the hanging plate and rain cover to the wall with screws;
- 3) Hang the device on the installed hanging plate and punch in the tamper-evident screws.

3. Schematic diagram of access control system

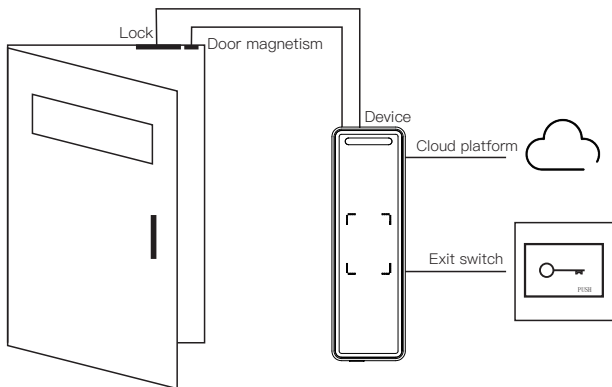


4. Connect door magnetic, door switch

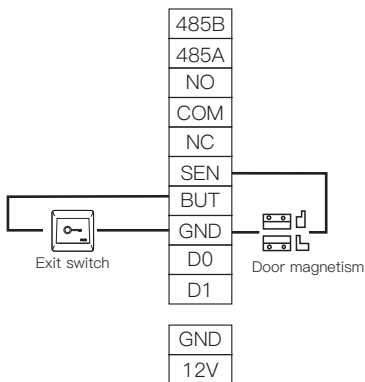


5.Connecting door lock

This equipment can support normally open and normally closed locks. NO terminals should be used for locks that are opened when power is on and closed when power is off. NC terminals should be used for locks that are closed when power is on and open when power is off.


1)Power-on lock

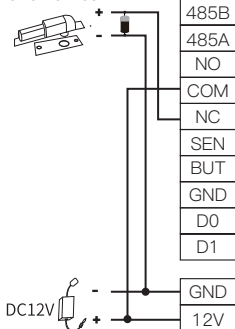


2)The lock is often unlocked when electrified

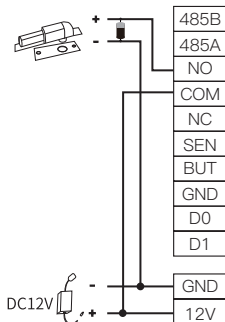


6.Local fingerprint registration

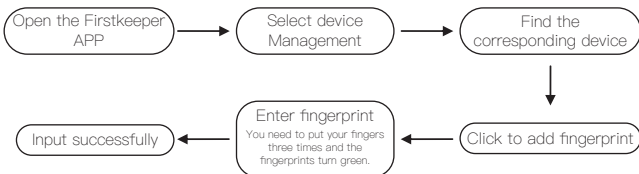


7.Add device (background)

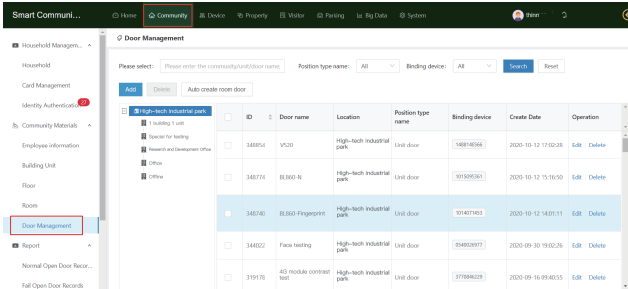

(1)

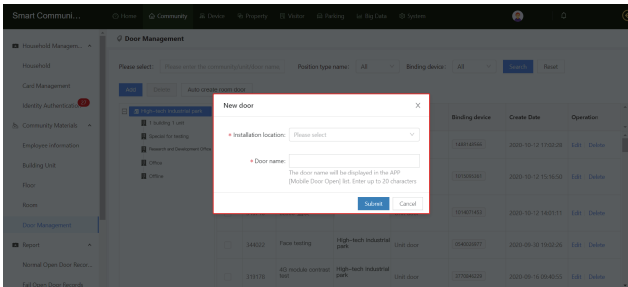

(2)

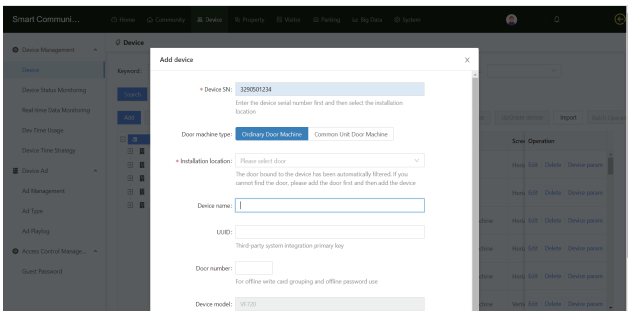

(3)

1. Click "Community"—"door Management", as shown in figure (1).
2. Click "add" to fill in the relevant information about the door. "installation location" can select "Community, Unit, Room" to create the door. The door number is used to write the card, and click "submit", as shown in figure (2).
3. Click "equipment"—"add" to fill in the equipment—related information, and click "submit", as shown in figure (3).

Note: two door machines are not allowed to be installed at the same door (installation location). When adding a door machine, the corresponding user information, user face, card, management machine, indoor machine, house, property, advertisement, announcement, visitors and other data will be added to the device.

8. Online, offline (background)

Click "Device"—"Device Status Monitoring" to view the online and offline status of the equipment.

Smart Communi... Home Community **Device** Property Visitor Parking IoT Big Data System

Device Management Device

Device Status Monitoring

Total devices 66 Online device 11 Offline device 51 No internet 4

Device name	Device model	Installation location	Status	Version	IP Address	Last connection time	Commands Count	Commands Result	Operation
17(3291531294)	V8100	Special for testing/1717	Offline		152.168.22.17		465	Add Command	Cancel Command and Details
194186053739(194186053739)	The access controller	Special for testing/Access controller	Offline				1490	Add Command	Cancel Command and Details
194186526299(194186526299)	The access controller	Unit 1 / 2nd floor of 1 building	Offline				1300	Add Command	Cancel Command and Details
1940384940(1940384940)	V500	Special for testing/1000	Offline		152.168.10.89		253	Add Command	Cancel Command and Details
1957843116(1957843116)	VF720	Special for testing/VF720-1	Offline		152.168.14.107		290	Add Command	Cancel Command and Details
23583294040(2358329404)	VF720	1 building 1 unit/first room VF720	Offline	2.19.23.200741596(100)	152.168.10.57	20200419183742	1335	OK	Cancel Command and Details
2358337007(2358337007)	M362	1 building 1 unit/first room M362	Offline				252	Add Command	Cancel Command and Details

Offline status

Smart Communi... Home Community **Device** Property Visitor Parking IoT Big Data System

Device Management Device

Device Status Monitoring

Total devices 66 Online device 11 Offline device 51 No internet 4

Device name	Device model	Installation location	Status	Version	IP Address	Last connection time	Commands Count	Commands Result	Operation
Financial office(2303210484)	M300	1 office	Online	101	121.35.2.186	20201020170238	0		Cancel Command and Details
Base V001-489148860	AS20	100	Online	V0.74.0	10.73.110.171	20201020170511	0	OK	Cancel Command and Details
Conference Room(1230579716)	M300	100 Room 1	Online	104	121.35.2.186	20201020170554	0		Cancel Command and Details
Conference Room(1940388912)	Q200	100 Room 1	Online	110	121.35.2.186	20201020170240	462		Cancel Command and Details
Customer equipment(2305052870)	M300	Unit 1 / 1000-1	Offline				419	Add Command	Cancel Command and Details
Base U001120819640	Q100	100	Not connected				0	OK	Cancel Command and Details
Access control 110(194186105110)	Access control	1 building 1 unit / 110 Room 1 1 building 1 unit / 110 Room 2 1 building 1 unit / 110 Room 3 1 building 1 unit / 110 Room 4	Offline				1535	Add Command	Cancel Command and Details
Gate gate-wifi(230505301701)	V610-T	1 unit	Offline		192.168.2.13		436	Add Command	Cancel Command and Details
Entrance gate-wifi(2305051400)	V610-T	1 gate-wifi	Online	2.19.23.20072715(100)	152.168.22.7	20201020170559	0	OK	Cancel Command and Details

Online status

9. Check the opening record

Smart Communi... Home Community Device Property Visitor Parking Lot Big Data System

Household Management

- Household
- Card Management
- Identity Authentication
- Community Materials
- Employee Information
- Building Unit
- Floor
- Room
- Door Management
- Report
 - Normal Open Door Records
 - Fail Open Door Records
 - Call Room Records

Normal Open Door Records

Keyword: Device SN: Name: All Open door type: All

Identity type: All Recent Time: One Week One Month Time: Start Time End Time

Search Reset

Delete Export exportCaptureImage

	Open door time	Name	Device name	Event Points	Open Door Type	Face Recognition Data	Capture
☐	2020-10-20 17:55:25	Guang Yang	Entrance gate-access (3300051-430)	Entrance gate-access	Face recognition open door	Match score 92 Body Temperature 36.40	
☐	2020-10-20 16:57:32	Zhang Mengqiang	Chief Manager's Office (3300051-40005)	Chief Manager's Office	Open the door remotely(A PP)	None	
☒	2020-10-20 16:56:19	Zhang Mengqiang	Entrance gate-access (3300051-430)	Entrance gate-access	Face recognition open door	Match score 91 Body Temperature 36.40	
☐	2020-10-20 16:20:37	Wu Jingwei	Gate1-4001-400005	Gate V320	Normal card opening/799162005	None	
☐	2020-10-20 16:19:56	Wu Jingwei	Gate1-4001-400005	Gate V320	Normal card opening/799162005	None	

Click "Community"—"Normal open door records" to view the normal opening record.

Click "Community"—"Fail open door records" to view the failed opening record.

10. View device information

1. Background operation

Smart Communi... Home Community Device Property Visitor Parking Lot Big Data System

Household Management

- Household
- Card Management
- Identity Authentication
- Community Materials
- Employee Information
- Building Unit
- Floor
- Room
- Door Management
- Report
 - Normal Open Door Records
 - Fail Open Door Records


Employee Information

Keyword: Please enter (name/mobile phone/ID card) Gender: All Switch Reset Read card number


Add department Add staff Import staff Export employees Department activity Delete Synchronize data to the device

	ID	Name	Gender	Email	Card number	Photo	Department	Create Date	Operation
☐	20141634		Male	1520519857				2020-10-16 15:20:04	Edit Delete Offline write card
☐	20002043		Male	1722782712				2020-05-16 15:14:57	Edit Delete Offline write card
☐	200010742		Female	13416840327				2020-04-17 1:10:04	Edit Delete Offline write card
☐	200016314		Male	13333754837				2020-04-14 2:18:02	Edit Delete Offline write card


(1)

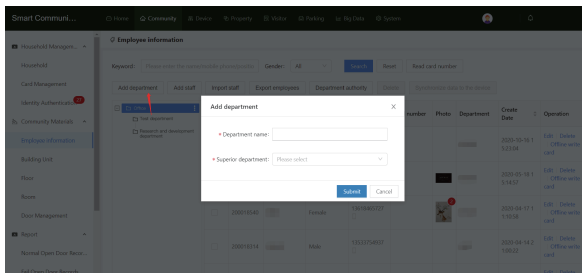


(2)

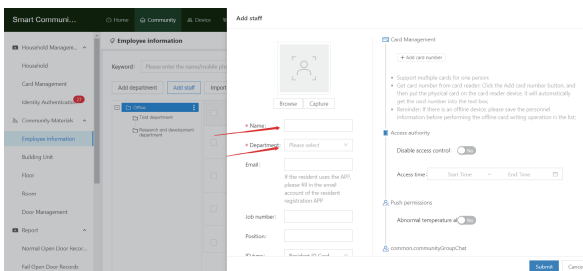

(3)

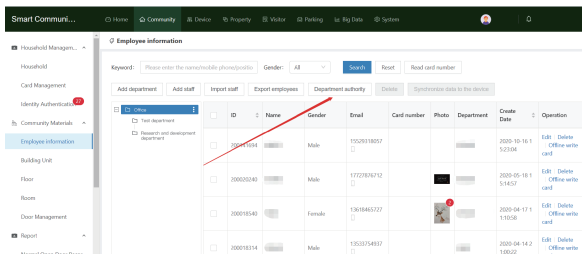


(4)

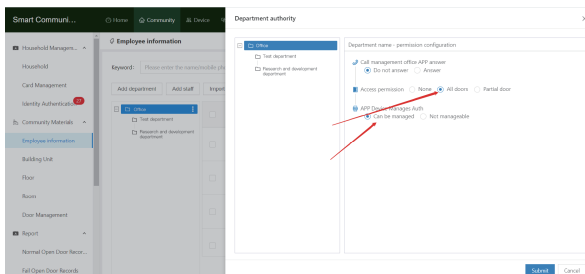


(5)

1. Click "Community"—"employee Information", as shown in figure (1).
2. Click "Add Department" in "employee Information", fill in the department name and superior department, and click "submit", as shown in figure (2).
3. Click "Add employee", fill in the employee's name, mobile phone number, department and job title, and click "submit", as shown in figure (3).
4. Click "Department authority", as shown in figure (4).
5. To configure the department permissions, click "submit", as shown in figure (5).

2.APP operation

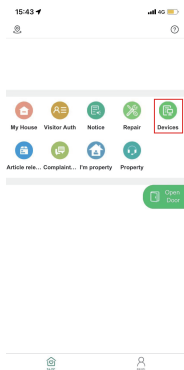

(1)

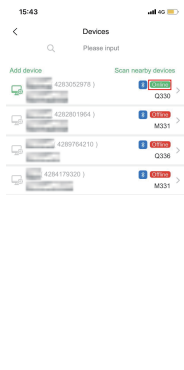

(2)

15:44	
< Device Information	
Device SN	4283052978
Device Model	Q330
Device type	Access control machine
Device name	会议室1
Device installation position	西廳/会议室1
Get device information >	
Configure key for card reading sector >	
Configure unlocking time >	
Configure Params >	
Configure APN >	
Configure Device IP >	
Sync device time >	
Read door opening record >	

(3)

15:44	
< Get system information	
Open-door-time	5
Card Registration Number	0
Phone Registration Number	0
Maximum User Capacity	1000
Device switch control signal	Manual Control
Device version information	1
Get device information	


(4)

1. Click "Community"—"Management", as shown in figure (1).
2. Click on the online device, as shown in figure (2), the page shown in figure (3) will appear, open the Bluetooth of the mobile phone, click "get device information", and the page shown in figure (4) will appear. Click "Get device information" to get the device information.


Note: before obtaining the device information, you need to turn on Bluetooth and the device is online; you need to be close to the device to get the information, but you can't get the device information offline.

11.Appendix

Product appearance display



Front



Back

The Company reserves the right of final change and interpretation.

