


VF618PRO


Quick start Guid



1. Appearance introduction

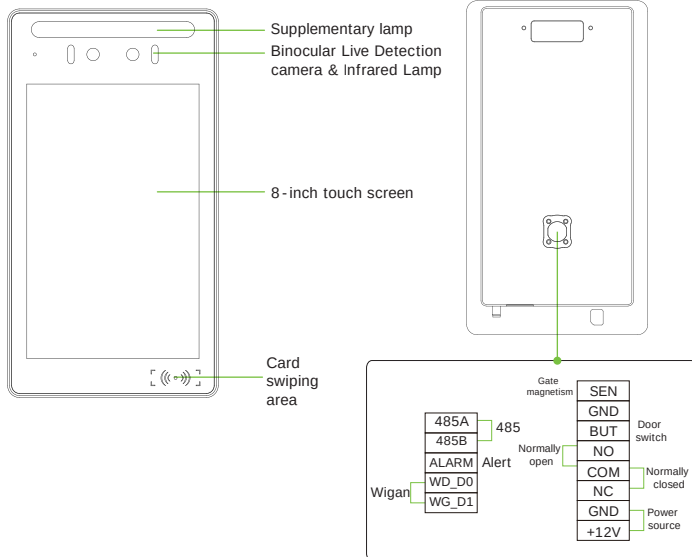


2. Equipment installation

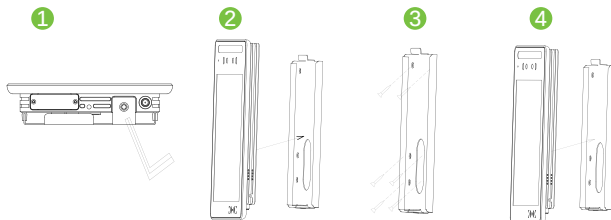


Please insert the cable into the terminal before installation.

- 1) remove the anti-disassembly screw with the four-corner screw and remove the hanging plate.
- 2) attach the hanging board to the wall and drill holes, and fix the hanging board to the wall with screws.
- 3) hang the equipment on the installed hanging board and insert the anti-disassembly screw.

3. Schematic diagram of access control system

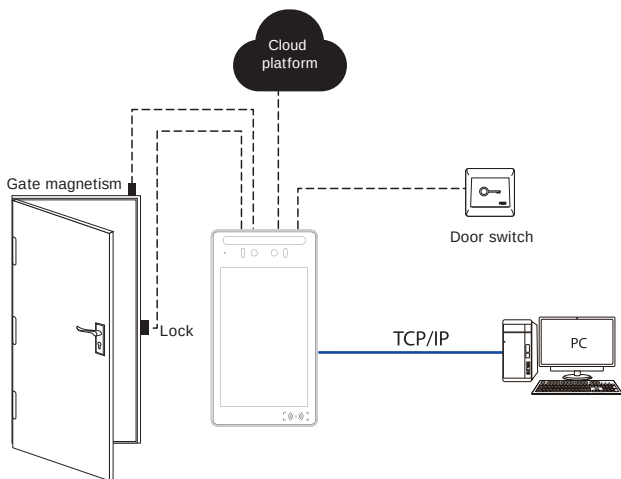


4. Connect door magnetic, door switch

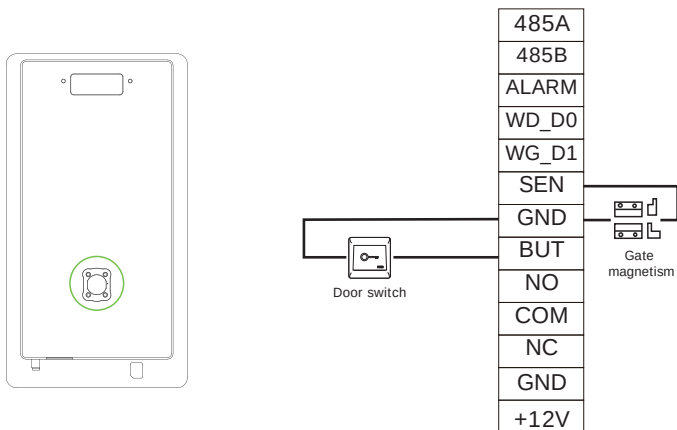


5. Connecting door lock

This equipment can support normally open and normally closed locks. NO terminals should be used for locks that are opened when power is on and closed when power is off, and NC terminals should be used for locks that are closed when power is on or opened when power is off.

1) Power-on lock

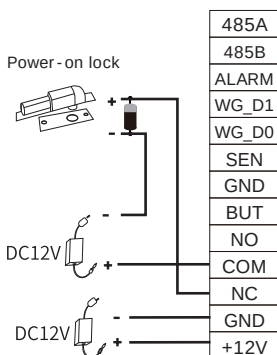

2) The lock is often unlocked when electrified.

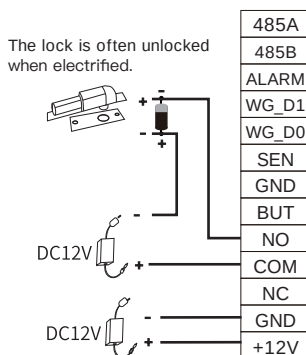

6. View system information


Press the "#" key, enter the administrative password "115200", press "#" to confirm, enter the device management interface, and press "0 #" to view the system information.




Current Device: 618pro-1
Device SN: 2497760516
Registered face count: 8
Face threshold: 75 75.0 Human identification threshold: 50
Version: 2.19.23.21111820(4)
Status/GND Mode: Door sensor mode
Current Network: ETHERNET, IP Address: 192.168.10.83
Face recognition algorithm version: 2.2H
System Version: full_aiot8365p1_64_bsp-userdebug
9 PPR1.180610.011 eng.zhang.20210902.154432
test-keys
Current Time: 2021-11-27 10:28:59 (Asia/Shanghai)

Command:
0 Look System Information
1 Volume Setting
2 Language Setting
3 Card Format Setting
4 Switch/Sensor Setting
5 View access control information
6 Test mode


7.Add device (background)

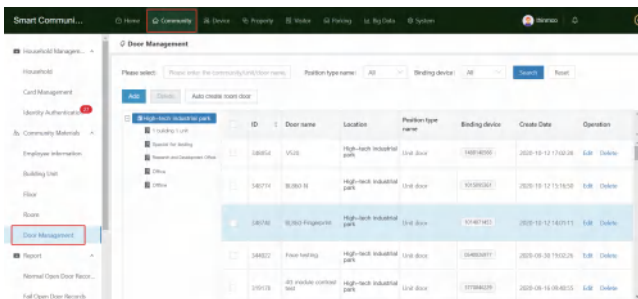

(1)

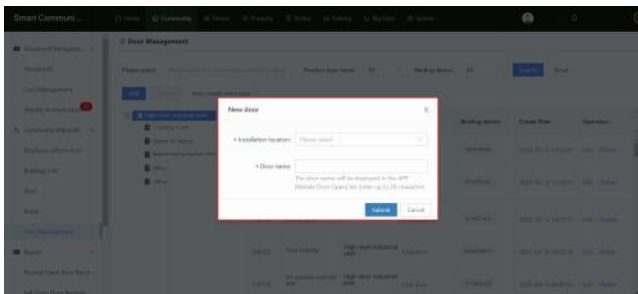

(2)

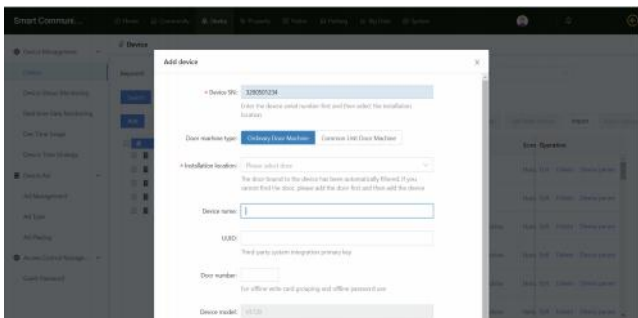

(3)

1. Click "Community"—"door Management", as shown in figure (1).
2. Click "add" to fill in the relevant information about the door. "installation location" can select "Community, Unit, Room" to create the door. The door number is used to write the card, and click "submit", as shown in figure (2).
3. Click "equipment"—"add" to fill in the equipment-related information, and click "submit", as shown in figure (3).

Note: two door machines are not allowed to be installed at the same door (installation location). When adding a door machine, the corresponding user information, user face, card, management machine, indoor machine, house, property, advertisement, announcement, visitors and other data will be added to the device.

8. Online, offline (background)

Click "Equipment"—"Equipment Status Monitoring"to view the online and offline status of the equipment.

Smart Communi...

- Home
- Community
- Device**
- Property
- Vehicle
- Parking
- Bg Data
- System

Device Management

- Device
- Device Status Monitoring**

Total devices: 96 Online device: 11 Offline device: 51 No internet: 4

Device name	Device model	Installation location	Status	Version	IP Address	Last connection time	Commands Count	Commands Result	Operation
131281512046	V8100	Globe for testing1111	Offline		152.160.22.17		465	Add Commands (Details)	Cancel Commands (Details)
10419463773304106852	The second generation	Globe for testingthe second generation	Offline				1400	Add Commands (Details)	Cancel Commands (Details)
10419463773304106856	The second generation	Lane 1 - End Row of 1 building	Offline				1300	Add Commands (Details)	Cancel Commands (Details)
10419463773304106862	V7006	Globe for testing1000	Offline		152.160.13.89		261	Add Commands (Details)	Cancel Commands (Details)
105194317015917041176	V7200	Globe for testingV7200+	Offline		152.160.54.10	7	290	Add Commands (Details)	Cancel Commands (Details)
235437043623346234646	V7200	1 building - internet access 100%	Offline	2.39.23.20(41516100)	152.160.83.57	20200419103047	1335	OK	Cancel Commands (Details)
235437001733012330017	M362	1 building - internet access failed	Offline				257	Add Commands (Details)	Cancel Commands (Details)

Real-time Data Monitoring

Dev Time Usage

Device Time Strategy

Device Act

Act Management

Act Type

Act Picking

Access Control Manage...

Guest Record

Offline status

Smart Communi...
[Home](#)
[Community](#)
[Device](#)
[Property](#)
[Vehicle](#)
[Parking](#)
[Big Data](#)
[System](#)

Device Status Monitoring

Device	Total devices 66	Online device 11	Offline device 51	No Internet 4
Devices/Status Monitoring				
Real-time Data Monitoring				
Dev Time Usage				
Device Time Strategy				
Device Add				
Ad Management				
Ad Type				
Access Control Manage...				
Guest Password				

Online status

9.Online, offline (device side)



Online statu


When the WIFI icon or 4G icon is displayed in the upper left corner and the icon is white, the device is online



Offline state


When the "prohibit" icon appears in the upper left corner and the icon is red, the device is offline.

10. Check the opening record

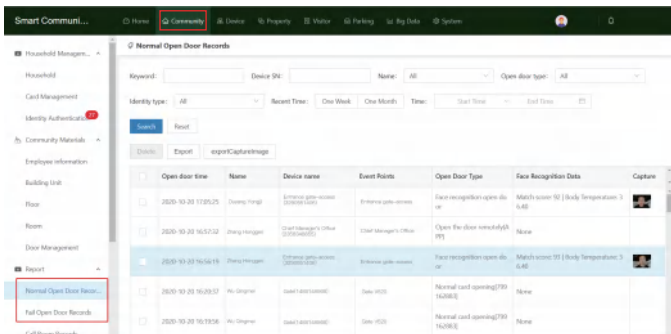

- Click "Community" - "normal opening record" to view the normal opening record.
- Click "Community" - "Open door failure record" to view the failed opening record.
- Click "Community" - "call Room record" to view the call room record.
- Click "Community" - "face Detection record" to view the record of opening the door through the face.


11. Face add (background)

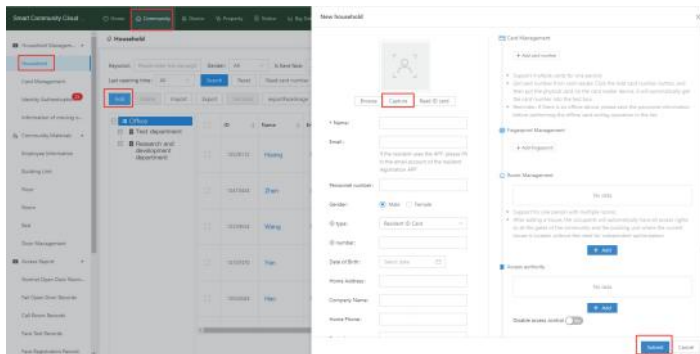

1. Click "Community" - "Household" - "add", fill in household information, click "Browse", you can upload local photos of your computer, and click "Snapshot" to take pictures on camera.





(3)

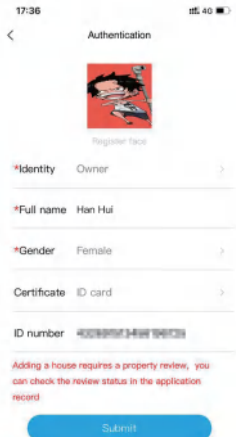


(4)

1. Click "Community"—"my House", as shown in figure (1).
2. Click "add House", as shown in figure (2).
3. Fill in the community information, as shown in figure (3).
4. Fill in the household information and upload the face, and click "submit", as shown in figure (4). After the background examination and approval, you can open the door to the face.




Note: if the household information has been completed, you can upload and replace face photos in "Community" - "my House" - "Register face".

13.Face deletion (background)

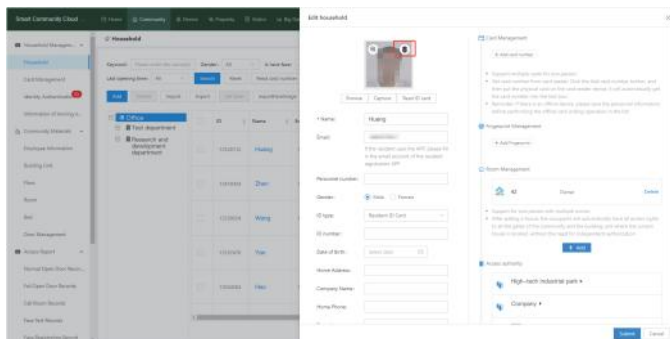


Click "Community" - "Household" - "add", click the face photo to appear the "delete" icon, click the icon to delete the face photo.

14.Face deletion (APP)



(1)

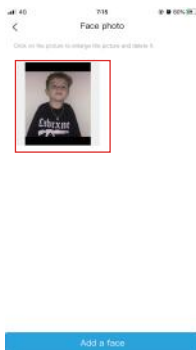

(2)




(3)


As shown in figure (1), click "my"-"my House"-"face has been registered" and the interface shown in figure (2) appears. Click on the picture to enlarge and delete the face, as shown in figure (3).

15.Appendix

Product appearance display

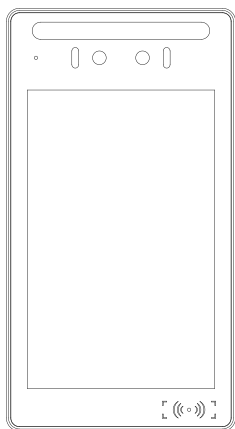

Front

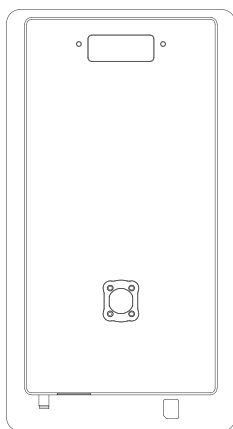

Back

