





VF720


Quick start Guide



1. Appearance Introduction

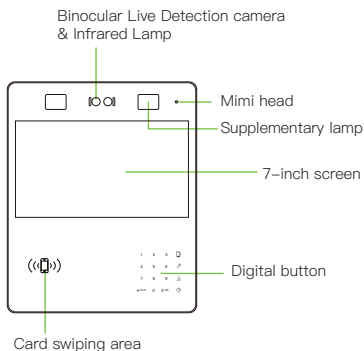


2. Equipment Installation

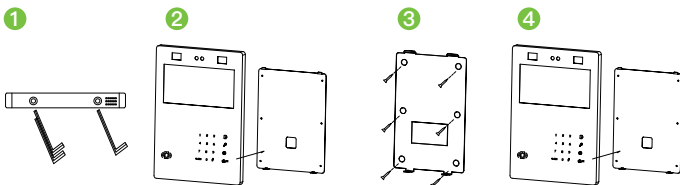


Please insert the cable into the terminal before installation.

- 1) remove the anti-disassembly screw with the four-corner screw and remove the hanging plate.
- 2) attach the hanging board to the wall and drill holes, and fix the hanging board to the wall with screws.
- 3) hang the equipment on the installed hanging board and insert the anti-disassembly screw.

3. Schematic diagram of access control system

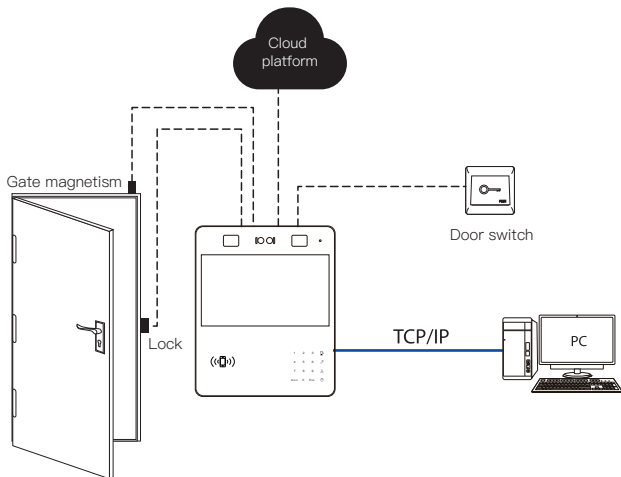


4. Connect door magnetic, door switch

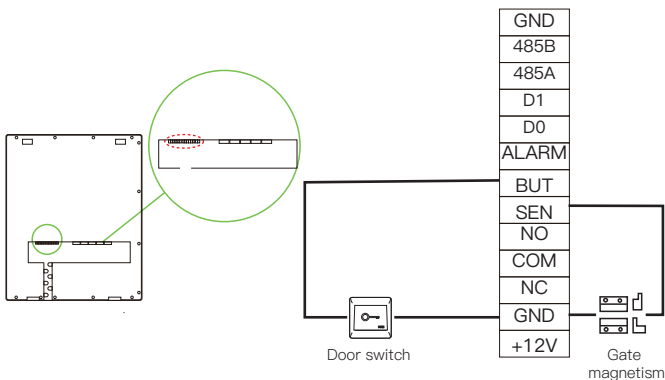


5. Connecting door lock

This equipment can support normally open and normally closed locks. NO terminals should be used for locks that are opened when power is on and closed when power is off, and NC terminals should be used for locks that are closed when power is on or opened when power is off.

1) Power-on lock

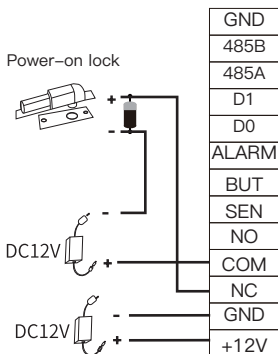

2) The lock is often unlocked when electrified.

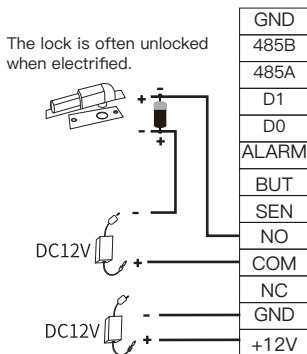


6. View system information


Press the "#" key, enter the administrative password "115200", press "#" to confirm, enter the device management interface, and press "1 #" to view the system information.




7.Add device (background)

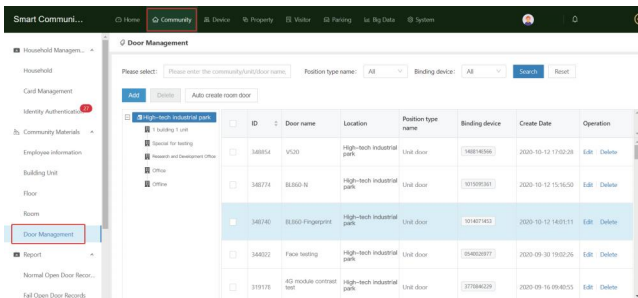

(1)

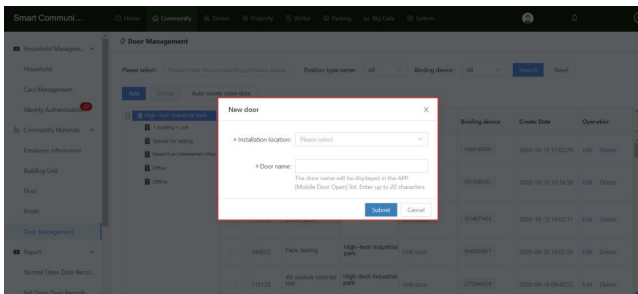

(2)

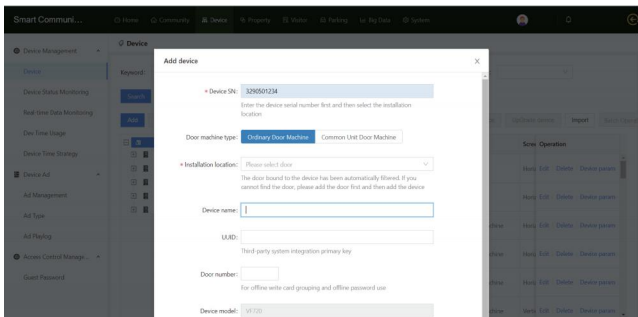

(3)

1. Click "Community"—"door Management", as shown in figure (1).
2. Click "add" to fill in the relevant information about the door. "installation location" can select "Community, Unit, Room" to create the door. The door number is used to write the card, and click "submit", as shown in figure (2).
3. Click "equipment"—"add" to fill in the equipment-related information, and click "submit", as shown in figure (3).

Note: two door machines are not allowed to be installed at the same door (installation location). When adding a door machine, the corresponding user information, user face, card, management machine, indoor machine, house, property, advertisement, announcement, visitors and other data will be added to the device.

8. Online, offline (background)

Click "Equipment"—"Equipment Status Monitoring" to view the online and offline status of the equipment.

Smart Communi... Home Community **Device** Property Visitor Parking Big Data System

Device Management

Device

Device Status Monitoring

Real-time Data Monitoring

Dev Time Usage

Device Time Strategy

Device Add

Ad Management

Ad Type

Ad Playlog

Access Control Manage...

Guest Password

Device Status Monitoring

Total devices 66 Online device 11 Offline device 51 No internet 4

Device name	Device model	Installation location	Status	Version	IP Address	Last connection time	Commands Count	Commands Result	Operation
17(251531294)	...	Operator for testing(1319)	Offline		192.168.22.17		405	Add Command	Cancel Command Details
194186053739194186053739	...	Operator for testing(Provision card only)	Offline				1690	Add Command	Cancel Command Details
194186052629919418605299	...	Unit 1 (2nd floor) of 1 building	Offline				1300	Add Command	Cancel Command Details
1949394640X1949394640X	...	Operator for testing(Provision)	Offline		192.168.10.69		253	Add Command	Cancel Command Details
19578031161957803116	...	Operator for testing(Provision)	Offline		192.168.16.107		230	Add Command	Cancel Command Details
2358329404(2358329404)	...	1 building - unit floor room 40108	Offline	2.19.23.20041516(100)	192.168.10.57	20200419180742	1335	OK	Cancel Command Details
2358337007(2358337007)	...	1 building - unit floor room 40108	Offline				252	Add Command	Cancel Command Details

Offline status

Smart Communi... Home Community **Device** Property Visitor Parking Big Data System

Device Management

Device

Device Status Monitoring

Real-time Data Monitoring

Dev Time Usage

Device Time Strategy

Device Add

Ad Management

Ad Type

Ad Playlog

Access Control Manage...

Guest Password


Device Status Monitoring

Total devices 66 Online device 11 Offline device 51 No internet 4

Device name	Device model	Installation location	Status	Version	IP Address	Last connection time	Commands Count	Commands Result	Operation
Provision office(2201210484)	...	Provision office	Online	101	121.35.2.186	2020/10/20 17:02:38	0		Cancel Command Details
Gate 155211489148950	...	Gate 15521	Online	192.168.0	192.168.110.171	2020/10/20 17:05:11	0	OK	Cancel Command Details
Conference Room1 (2203737140)	...	Conference Room1	Online	104	121.35.2.186	2020/10/20 17:05:54	0		Cancel Command Details
Conference Room2 (1949394640)	...	Conference Room2	Online	110	121.35.2.186	2020/10/20 17:02:40	462		Cancel Command Details
Customer equipment(2201210484)	...	Unit 1 (2nd floor) of 1 building	Offline				419	Add Command	Cancel Command Details
Unit 1(24110591894)	...	Office Room 1	No internet				0	OK	Cancel Command Details
Access control 1103194186053739	...	1 building - unit 7 (13th floor) 1 1 building - unit 7 (13th floor) 2 1 building - unit 7 (13th floor) 3 1 building - unit 7 (13th floor) 4	Offline				1535	Add Command	Cancel Command Details
Gate gate-unit(2300833179)	...	Gate gate-unit	Offline		192.168.2.11		436	Add Command	Cancel Command Details
Entrance gate-unit(2300833179)	...	Entrance gate-unit	Online	2.19.23.20072715(100)	192.168.22.7	2020/10/20 17:05:59	0	OK	Cancel Command Details

Online status

9. Online, offline (device side)

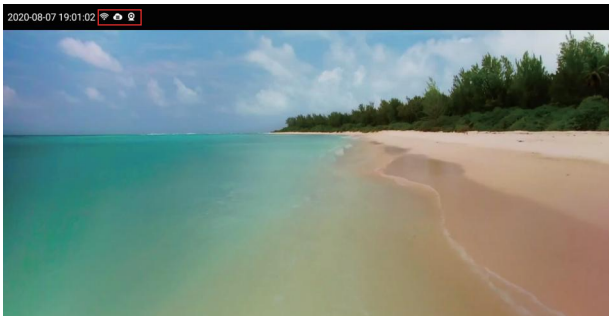

Online statu

When the WIFI icon or 4G icon is displayed in the upper left corner and the icon is white, the device is online



Offline state

When the "prohibit" icon appears in the upper left corner and the icon is red, the device is offline.

10. Check the opening record

Smart Community Cloud

Home Community Device Property Visitor Parking Ut. Big Data System

Household Management

Household

Card Management

Identity Authentication

Community Materials

Employee Information

Building Unit

Floor

Room

Door Management

Report

Normal Open Door Records

Full Open Door Records

Call Room Records

Normal Open Door Records

Keyword: Device SN: Name: All Open door type: All

Identity type: All Recent Time: One Week One Month Time: Start Time End Time

Search Reset

Delete Export exportCaptureImage

Open door time	Name	Device name	Event Points	Open Door Type	Face Recognition Data	Capture
2020-10-20 17:05:25	Quang Yongli	Entrance gate-access (220000-100)	Entrance gate-access	Face recognition open door	Match score: 92 Body temperature: 36.40	
2020-10-20 16:57:32	Zhang Honggen	Chief Manager's Office (220000-0002)	Chief Manager's Office	Open the door remotely(A PP)	None	
2020-10-20 16:56:19	Zhang Honggen	Entrance gate-access (220000-100)	Entrance gate-access	Face recognition open door	Match score: 93 Body temperature: 36.40	
2020-10-20 16:20:37	Wu Gengwei	Gate#1001-000001	Gate #1020	Normal card opening/799162883	None	
2020-10-20 16:19:56	Wu Gengwei	Gate#1001-000001	Gate #1020	Normal card opening/799162883	None	

Click "Community"—"normal opening record" to view the normal opening record.
 Click "Community"—"Open door failure record" to view the failed opening record.
 Click "Community"—"call Room record" to view the call room record.
 Click "Community"—"face Detection record" to view the record of opening the door through the face.

11. Face add (background)

Smart Community Cloud

Home Community Device Property Visitor Parking Ut. Big Data System

Household Management

Household

Card Management

Identity Authentication

Community Materials

Employee Information

Building Unit

Floor

Room

Bed

Door Management

Access Report

Normal Open Door Records

Full Open Door Records

Call Room Records

Face Test Records

Face Registration Record

New household

Household

Keyword: Please enter the name of the household Last opening time: All Search Reset Read card number

Add Delete Import Export Test Record exportFaceImage

Office

Test department

Research and development department

15238112 Huang

13470424 Zhen

13339504 Wang

13107470 Yan

13038054 Hao

Card Management

Add card number

- Support multiple cards for one person.
- Get card number from card reader. Click the Add card number button, and then put the physical card on the card reader device. It will automatically get the card number into the list box.
- Reminder: If there is an offline device, please save the personal information before performing the offline card writing operation in the list.

Fingerprint Management

Add Fingerprint

Room Management

No data

- Support for one person with multiple rooms.
- After adding a house, the occupants will automatically have all access rights to all the gates of the community and the building and where the current house is located, without the need for independent authorization.

Access authority


No data

Disable access control

Add


Delete Cancel

1. Click "Community"—"Household"—"add", fill in household information, click "Browse", you can upload local photos of your computer, and click "Snapshot" to take pictures on camera.

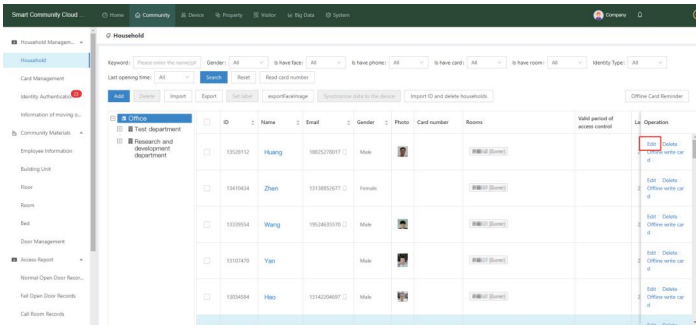

2. If you want to input information, you can click "Edit" to upload faces.

12.Face deletion (background)

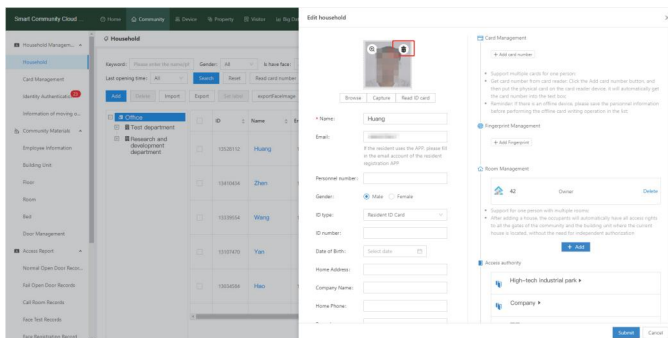

Click "Community"—"Household"—"add", click the face photo to appear the "delete" icon, click the icon to delete the face photo.

13.Appendix

Product appearance display

