TalentCell LF8011

Universal instruction manual



Thank you for applying our portable power bank. Please read the user manual carefully and properly keep it for reference.

Specification:

Model:LF8011
Capacity: 25.6V 6000mAh 153.6Wh.
Build-in battery: High Quality LiFePO4 battery cells.

Input:

29.2V/4A Max.
(our package only include a low current charger)

Output:

Nominal: 25.6V (29.2-18V) /10A Max.
More than 90% of the time, the output voltage is about from 24V to 26V in one of discharge cycle.

Size: 152*65*97mm

Weight: 1.4kg / 3.09 lb


In order to prevent over-discharging, the cell shall be charged periodically to maintain between 28V and 29.4V. Over-discharging may causes loss of cell performance, characteristics, or battery functions.



How to charge the battery

1.The **Red** clip clamps the **Red** positive terminal,
The **Black** clip clamps the **Black** negative terminal.

2.The led indicator of AC/DC charger will change from **Red** to **Green** while the power bank be 95% of full charged.

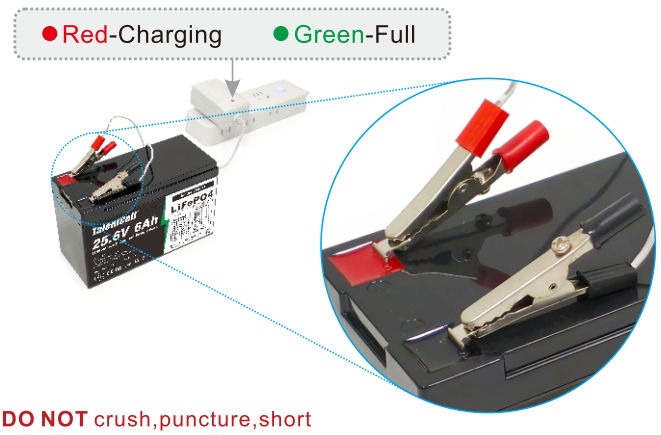

DO NOT crush,puncture,short or incinerate extemal cantact

Contact us

For any inquiries or comments concerning our product or any quality-rdated issue with our product, or you want to customize any other battery packs, please feel free to contact us, we will respond to you as soon as possible and do our best to help you.

Email us: **service@talentcell.com**
Website: **www.talentcell.com**

Cautions

1.The appliance should be taken to avoid exposure, percussion, water, and rain in the transport process, and make the battery positive and negative pole Insulation.
2.The appliance should be stored in a cool dry indoor storage, avoid flooding, rain.
3.No long-term placement in a low voltage state. Appliances do not use the electricity charge to more than 50% of storage, can be stored for more than 6 months, but in order to extend the service life, suggest charging every three months.
4.Do not immerse the appliance in water or become wet.
5.Do not modify or disassemble the appliance.
6.Do not reverse connect the input or output.
7.Be careful not to let the children touch appliance.
8.Do not put the appliance into the fire.
9.Please use qualified charger to charge the appliance.
10.Do not impact heavy and throw the appliance.
11.If the liquid of the appliance gets into your eyes, do not rub your eyes, rinse with water and consult doctors immediately.
12.If there is any abnormal or malfunction when charging please contact your dealer.

Application

Compatible with 24V battery-powered electric vehicles, children's cars, lawn mowers, emergency lights, motorhomes, feeders, cameras and more

ASIN: B0CNLKKL9C
Package content-1

1 x 24V LiFePO4 Battery Pack
1 x 28.8V 1A Battery Charger
1 x DC5521 Female to Alligator Clip Cable
2 x Female Spade Connector Wire 18AWG



ASIN: B0FF1T4YP7
Package content-2

2 x 24V LiFePO4 Battery Pack
4 x Female Spade Connector Wire 18AWG

