TalentCell

PV030109-26/PV030202-26/ PC040102-60

Universal instruction manual



Thank you for applying our portable power bank. Please read the user manual carefully and properly keep it for reference.

Specification

Model	PV030109-26		
Capacity	10.8V/2.6Ah 28.08Wh		
Input	DC 5521: 12.6V/0.5A (3A Max.)		
Output	DC 5521: 12V(9V-12.6V)/3A Max.		
Weight	Approx.163g	Size	72x55.8x19.2mm





PV030109-26 Package Contents

1x 12V Lithium ion battery pack
1x 12.6V 0.5A charger
1x DC 5521 female plug to bare wire open end power wire
1x Cable connector

Specification

Model	PV030202-26		
Capacity	10.8V/5.2Ah 56.16Wh		
Input	DC 5521: 12.6V/1A (3A Max.)		
Output	DC 5521: 12V(9V-12.6V)/3A Max.		
Weight	Approx.306g	Size	74.6x58.7x37.9mm





PV030202-26 Package Contents

1x 12V Lithium ion battery pack
1x 12.6V 1A charger
1x DC 5521 female plug to bare wire open end power wire
1x Cable connector

Specification

Model	PC040102-60		
Capacity	12.8V/6000mAh 76.8Wh		
Input	DC 5521 female: 14.4V/1.5A		
Output	DC 5521 female port: 12.8V(10V-14.6V)/5A Max. DC 5521 male port: 12.8V(10V-14.6V)/5A Max.		
Weight	Approx.600g	Size	132x75.8x37.3mm




PC040102-60 Package Contents

1x 12V LiFePO4 battery pack
1x 14.4V 1.5A charger
1x DC 5521 female plug to bare wire open end power wire
1x Cable connector

Warning: Please confirm your device voltage before you use this battery. Low voltage devices can't be plugged into the high voltage output port, otherwise, it might damage your equipment.

Capacity display

Capacity light	1 light on	2 light on	3 light on	4 light on	5 light on
Capacity	0-15%	15-40%	40-70%	70-85%	85-100%

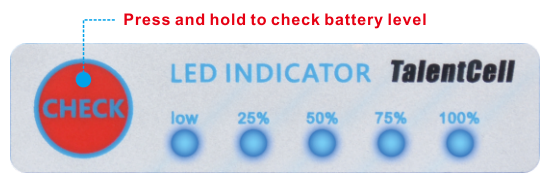

How to charge the power bank?

PC040102-60 :

It can be charged via the DC port using the 14.4V LiFePO4 battery wall charger.

PV030109-26 / PV030202-26

It can be charged via the DC port using the 12.6V Lithium ion battery wall charger.

The led indicator of AC-DC charger show RED means charging process going.
The led indicator of AC-DC charger show GREEN means charging process completed.
After the unit is fully charged, please remove the AC wall charger in time.

Cautions

1.The appliance should be taken to avoid exposure, percussion, water, and rain in the transport process, and make the battery positive and negative pole Insulation.
2.The appliance should be stored in a cool dry indoor storage, avoid flooding, rain.
3.No long-term placement in a low voltage state. Appliances do not use the electricity charge to more than 50% of storage, can be stored for more than 6 months, but in order to extend the service life, suggest charging every three months.
4.Do not immerse the appliance in water or become wet.
5.Do not modify or disassemble the appliance.
6.Do not reverse connect the input or output.
7.Be careful not to let the children touch appliance.
8.Do not put the appliance into the fire.
9.Please use qualified charger to charge the appliance.
10.Do not impact heavy and throw the appliance.
11.If the liquid of the appliance gets into your eyes, do not rub your eyes, rinse with water and consult doctors immediately.
12.If there is any abnormal or malfunction when charging please contact your dealer.

Contact us

For any inquiries or comments concerning our product or any quality-related issue with our product, or you want to customize any other battery packs, please feel free to contact us, we will respond to you as soon as possible and do our best to help you.

Email us: service@talentcell.com
Website: www.talentcell.com