




M230

Quick Installation Guide

1.Appearance




2.Equipment installation


1




2



3




4




- 1) Use a screwdriver to remove the anti-disassembly screw and remove the hanging plate;
- 2) Attach the hanging plate and rain cover to the wall and drill holes, and fix the hanging plate and rain cover to the wall with screws;
- 3) Hang the device on the installed hanging plate and punch in the tamper-evident screws.

3.Schematic diagram of access control system

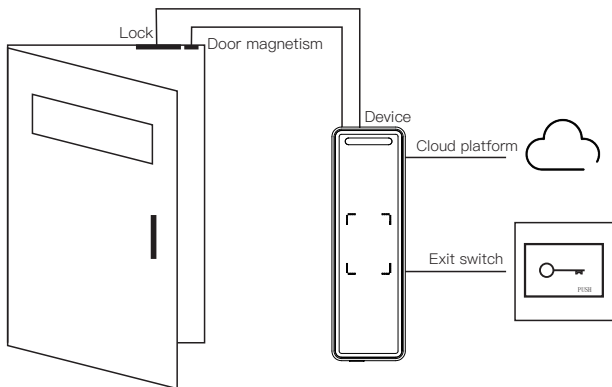


4.Connect door magnetic, door switch

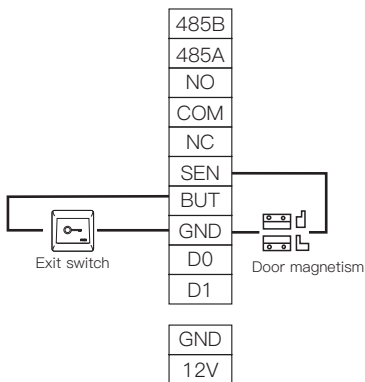


5.Connecting door lock

This equipment can support normally open and normally closed locks. NO terminals should be used for locks that are opened when power is on and closed when power is off. NC terminals should be used for locks that are closed when power is on and open when power is off.

1)Power-on lock



2)The lock is often unlocked when electrified



6.Add device (background)

Smart Communi...

Home Community Device Property Visitor Parking Lot Big Data System

Household Management

Household

Card Management

Identity Authentication

Community Materials

Employee Information

Building Unit

Floor

Room

Door Management

Report

Normal Open Door Record

Fail Open Door Records


Door Management

Please select: Please enter the community/unit/door name. Position type name: All Binding device: All Search Reset


Add Delete Auto create room door

ID	Door name	Location	Position type name	Binding device	Create Date	Operation
348854	V520	High-tech industrial park	Unit door	1488146366	2020-10-12 17:02:28	Edit Delete
348774	BL860-N	High-tech industrial park	Unit door	107509381	2020-10-12 15:16:50	Edit Delete
348740	BL860-Fingerprint	High-tech industrial park	Unit door	1014071453	2020-10-12 14:01:11	Edit Delete
348022	Face testing	High-tech industrial park	Unit door	0540320877	2020-09-30 19:02:26	Edit Delete
319176	43 module contrast test	High-tech industrial park	Unit door	3770846229	2020-09-16 09:40:55	Edit Delete

(1)

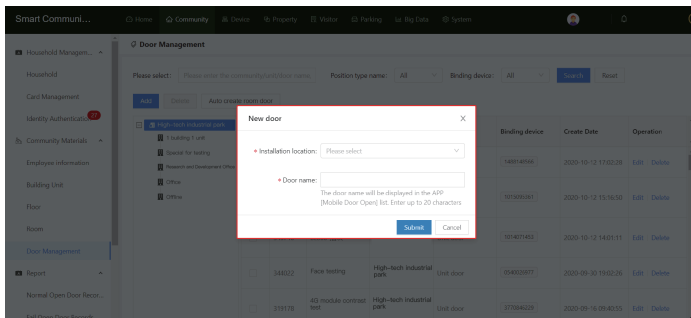

(2)

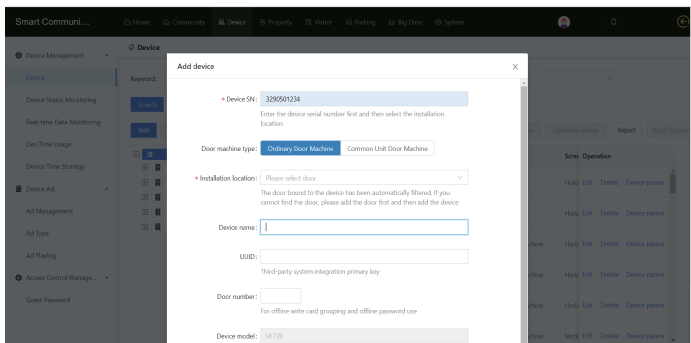

(3)

1. Click "Community"—"door Management", as shown in figure (1).
2. Click "add" to fill in the relevant information about the door. "installation location" can select "Community, Unit, Room" to create the door. The door number is used to write the card, and click "submit", as shown in figure (2).
3. Click "equipment"—"add" to fill in the equipment-related information, and click "submit", as shown in figure (3).

Note: two door machines are not allowed to be installed at the same door (installation location). When adding a door machine, the corresponding user information, user face, card, management machine, indoor machine, house, property, advertisement, announcement, visitors and other data will be added to the device.

7.Online, offline (background)

Click "Equipment"—"Equipment Status Monitoring"to view the online and offline status of the equipment.

Smart Communi...	Home	Community	Device	Property	Visitor	Parking	Req Data	System		
Device Management	Device Status Monitoring									
Device	Total devices 66 Online device 11 Offline device 51 No internet 4									
Device Status Monitoring	Device name	Device model	Installation location	Status	Version	IP Address	Last connection time	Commands Count	Commands Result	Operation
Real-time Data Monitoring	1713251531294	V8100	Special for testing13117	Offline		152.168.22.17		465	Add Command	Cancel Command and Details
Dev Time Usage	194186053739194186053739	The access controller	Special for testing-access controller	Offline				1490	Add Command	Cancel Command and Details
Dev Time Strategy	19418605262991941860526299	The access controller	Unit 1 / 2nd floor of 1 building	Offline				1300	Add Command	Cancel Command and Details
Device Ad	19493846401949384640	V500	Special for testing1600	Offline		152.168.10.89		253	Add Command	Cancel Command and Details
Ad Management	19578431161957843116	VF720	Special for testingVF720-1	Offline		152.168.14.107		290	Add Command	Cancel Command and Details
Ad Type	23581294042358129404	VF720	1 building 1 unit/first room VF720	Offline	2.19.23.20041516108	152.168.10.57	20200419183742	1335	OK	Cancel Command and Details
Access Control Manage...	23581570072358157007	M362	1 building 1 unit/first room M362	Offline				252	Add Command	Cancel Command and Details
Guest Password										

Offline status

Smart Communi...	Home	Community	Device	Property	Visitor	Parking	Req Data	System		
Device Management	Device Status Monitoring									
Device	Total devices 66 Online device 11 Offline device 51 No internet 4									
Device Status Monitoring	Device name	Device model	Installation location	Status	Version	IP Address	Last connection time	Commands Count	Commands Result	Operation
Real-time Data Monitoring	Frontdoor-eth02200010484	M200	1	Offline	101	121.35.2.186	20201020170238	0		Cancel Command and Details
Dev Time Usage	Gate-V5001-4801480680	A520	100	Online	V5.7.4.0	10.73.110.171	20201020170511	0	OK	Cancel Command and Details
Dev Time Strategy	Conference Room1 22000379168	M200	1	Online	104	121.35.2.186	20201020170554	0		Cancel Command and Details
Device Ad	Conference Room2 19400800153	Q2000	1	Online	110	121.35.2.186	20201020170240	462		Cancel Command and Details
Ad Management	Customer equipment32000526151	M500	Unit 1 / V500-1	Offline				419	Add Command	Cancel Command and Details
Ad Type	Room-L00115590960	Q100	1	Offline				0	OK	Cancel Command and Details
Access Control Manage...	Access control 1192104100105119	Access control	1 building 1 unit / 119 floor 1 1 building 1 unit / 119 floor 2 1 building 1 unit / 119 floor 3 1 building 1 unit / 119 floor 4	Offline				1535	Add Command	Cancel Command and Details
Guest Password	Gate-gate-wifi320005301715	VF618-T	1	Offline		192.168.2.13		436	Add Command	Cancel Command and Details
	Entrance-gate-wifi32000514061	VF618-T	1	Online	2.19.23.20072715106	192.168.22.7	20201020170509	0	OK	Cancel Command and Details

Online status

8. Check the opening record

Smart Communi... Home Community Device Property Visitor Parking Lot Big Data System

Household Management

- Household
- Card Management
- Identity Authentication
- Community Materials
- Employee Information
- Building Unit
- Floor
- Room
- Door Management
- Report
 - Normal Open Door Records
 - Fail Open Door Records
 - Call Room Records

Normal Open Door Records

Keyword: Device SN: Name: All Open door type: All

Identity type: All Recent Time: One Week One Month Time: Start Time End Time

Search Reset

Delete Export exportCaptureImage

	Open door time	Name	Device name	Event Points	Open Door Type	Face Recognition Data	Capture
☐	2020-10-20 17:55:25	Gaoqiang Yang	Entrance gate-access (33000511-430)	Entrance gate-access	Face recognition open door	Match score 92 Body Temperature 36.40	
☐	2020-10-20 16:57:32	Zhang Mengqiang	Chief Manager's Office (33000511-4005)	Chief Manager's Office	Open the door remotely(A PP)	None	
☒	2020-10-20 16:56:19	Zhang Mengqiang	Entrance gate-access (33000511-430)	Entrance gate-access	Face recognition open door	Match score 91 Body Temperature 36.40	
☐	2020-10-20 16:20:37	Wu Jingwei	Gate#14081408005	Gate V520	Normal card opening/799162885	None	
☐	2020-10-20 16:19:56	Wu Jingwei	Gate#14081408005	Gate V520	Normal card opening/799162885	None	

Click "Community"—"Normal open door records" to view the normal opening record.

Click "Community"—"Fail open door records" to view the failed opening record.

9. View device information

1. Background operation

Smart Communi... Home Community Device Property Visitor Parking Lot Big Data System

Household Management

- Household
- Card Management
- Identity Authentication
- Community Materials
- Employee Information
- Building Unit
- Floor
- Room
- Door Management
- Report
 - Normal Open Door Records
 - Fail Open Door Records


Employee Information

Keyword: Please enter (name/mobile phone/ID card) Gender: All Switch Reset Read card number


Add department Add staff Import staff Export employees Department activity Delete Synchronize data to the device

	ID	Name	Gender	Email	Card number	Photo	Department	Create Date	Operation
☐	203141634		Male	1520519857				2020-10-16 15:20:04	Edit Delete Offline write card
☐	20002043		Male	1722782712				2020-05-16 15:14:57	Edit Delete Offline write card
☐	200010743		Female	13616840327				2020-06-17 11:00:06	Edit Delete Offline write card
☐	200010714		Male	13333754837				2020-04-14 2:00:02	Edit Delete Offline write card


(1)

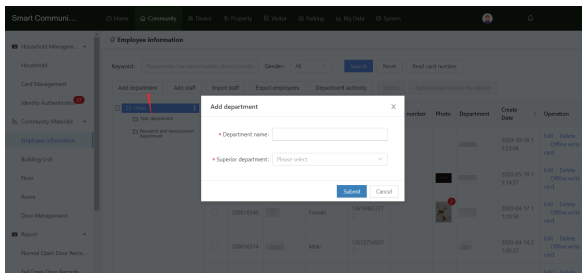


(2)

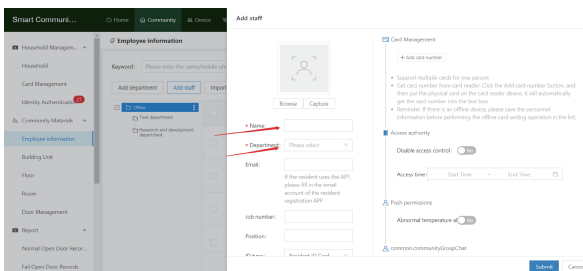

(3)

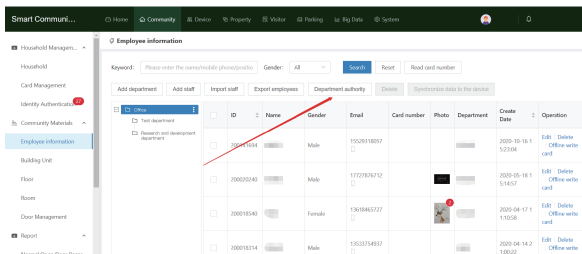


(4)

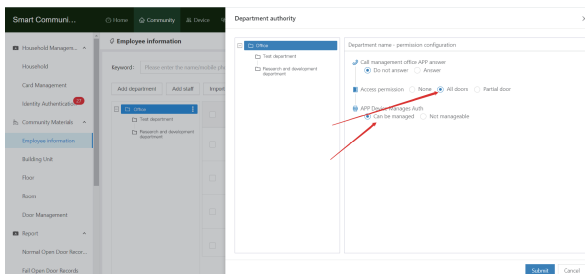


(5)

1. Click "Community"—"employee Information", as shown in figure (1).
2. Click "Add Department" in "employee Information", fill in the department name and superior department, and click "submit", as shown in figure (2).
3. Click "Add employee", fill in the employee's name, mobile phone number, department and job title, and click "submit", as shown in figure (3).
4. Click "Department authority", as shown in figure (4).
5. To configure the department permissions, click "submit", as shown in figure (5).

2.APP operation

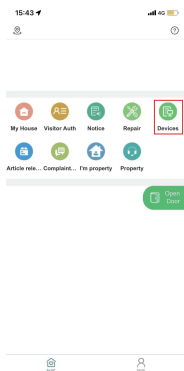

(1)

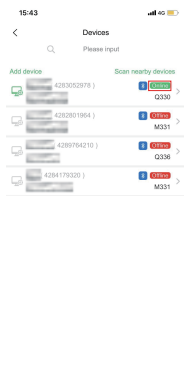

(2)

15:44	4G
<	Device Information
Device SN	4283052978
Device Model	Q330
Device type	Access control machine
Device name	会议室1
Device installation position	西廳/会议室1
Get device information	>
Configure key for card reading sector	>
Configure unlocking time	>
Configure Params	>
Configure APN	>
Configure Device IP	>
Sync device time	>
Read door opening record	>

(3)

15:44	4G
<	Get system information
Open-door-time	5
Card Registration Number	0
Phone Registration Number	0
Maximum User Capacity	1000
Device switch control signal	Manual Control
Device version information	1
Get device information	


(4)

1. Click "Community"—"Management", as shown in figure (1).
2. Click on the online device, as shown in figure (2), the page shown in figure (3) will appear, open the Bluetooth of the mobile phone, click "get device information", and the page shown in figure (4) will appear. Click "Get device information" to get the device information.


Note: before obtaining the device information, you need to turn on Bluetooth and the device is online; you need to be close to the device to get the information, but you can't get the device information offline.

10.Appendix

Product appearance display



Front



Back

The Company reserves the right of final change and interpretation.

