



Q334


Quick Installation Guide

1.Appearance

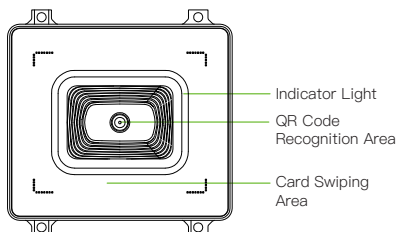


Power Source	12V	GND	Power Source
	12V	GND	
Gate Magnetism	SEN	BUT	Door Switch
LED	LED	ALARM	
Wigan	WG2D0	WG2D1	Wigan
	WG1D0	WG1D1	
485	485B	485A	485
Electric Lock	NC	NO	Electric Lock
	COM	GND	

2.Equipment Installation


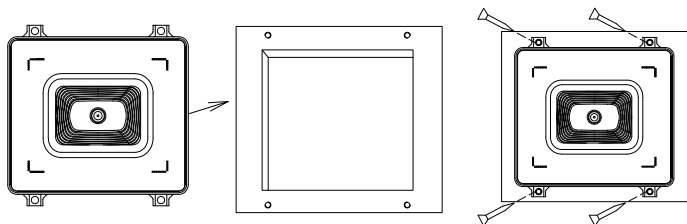


Place the equipment on the perforated wall and fix it with 4 screws.

3.Schematic Diagram of Access Control System

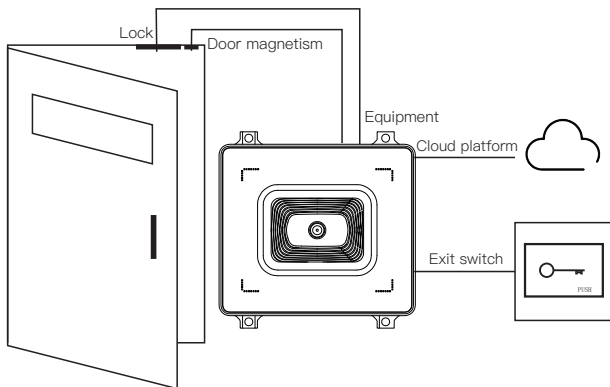


4.Connect Door Magnetic, Door Switch




5.Connecting Door Lock

This equipment can support normally open and normally closed locks. NO terminals should be used for locks that are opened when power is on and closed when power is off. NC terminals should be used for locks that are closed when power is on and open when power is off.

1)Power-on lock



2)The lock is often unlocked when electrified



6.Add Device (Background)

Smart Communi...

Home Community Device Property Visitor Parking Lot Big Data System

Household Management

Household

Card Management

Identity Authentication

Community Materials

Employee Information

Building Unit

Floor

Room

Door Management

Report

Normal Open Door Record

Fail Open Door Records


Door Management

Please select: Please enter the community/unit/door name. Position type name: All Binding device: All Search Reset


Add Delete Auto create room door

ID	Door name	Location	Position type name	Binding device	Create Date	Operation
348854	V520	High-tech industrial park	Unit door	1488146566	2020-10-12 17:02:28	Edit Delete
348774	BL860-N	High-tech industrial park	Unit door	107509381	2020-10-12 15:16:50	Edit Delete
348740	BL860-Fingerprint	High-tech industrial park	Unit door	1014071453	2020-10-12 14:01:11	Edit Delete
348032	Face testing	High-tech industrial park	Unit door	0540320877	2020-09-30 19:02:26	Edit Delete
319176	43 module contrast test	High-tech industrial park	Unit door	3770846229	2020-09-16 09:40:55	Edit Delete

(1)

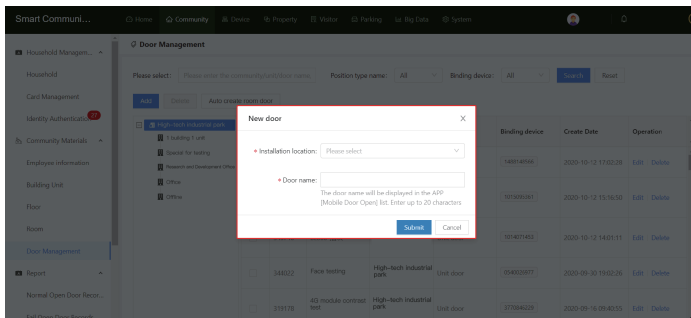

(2)

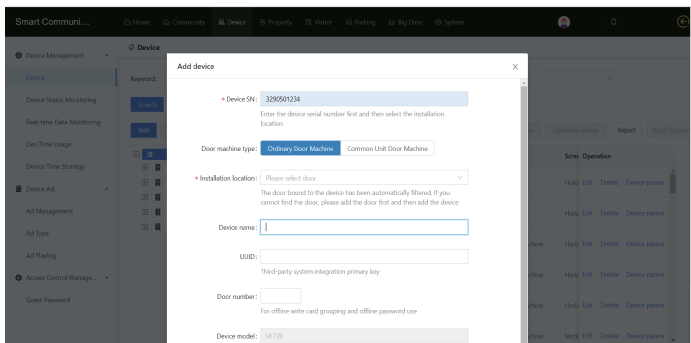

(3)

1. Click "Community"—"door Management", as shown in figure (1).
2. Click "add" to fill in the relevant information about the door. "installation location" can select "Community, Unit, Room" to create the door. The door number is used to write the card, and click "submit", as shown in figure (2).
3. Click "equipment"—"add" to fill in the equipment-related information, and click "submit", as shown in figure (3).

Note: two door machines are not allowed to be installed at the same door (installation location). When adding a door machine, the corresponding user information, user face, card, management machine, indoor machine, house, property, advertisement, announcement, visitors and other data will be added to the device.

7.Online, Offline (Background)

Click "Equipment"—"Equipment Status Monitoring"to view the online and offline status of the equipment.

Smart Communi...	Home	Community	Device	Property	Visitor	Parking	Reg Data	System		
Device Management	Device Status Monitoring									
Device	Total devices 66 Online device 11 Offline device 51 No internet 4									
Device Status Monitoring	Device name	Device model	Installation location	Status	Version	IP Address	Last connection time	Commands Count	Commands Result	Operation
Real-time Data Monitoring	1713251531294	V8100	Special for testing13117	Offline		152.168.22.17		465	Add Command	Cancel Command and Details
Dev Time Usage	194186253739194186253739	The access controller	Special for testing/access controller	Offline				1490	Add Command	Cancel Command and Details
Dev Time Strategy	194186256299194186256299	The access controller	Unit 1 / 2nd floor of 1 building	Offline				1300	Add Command	Cancel Command and Details
Device Ad	19493846401949384640	V500	Special for testing1600	Offline		152.168.10.89		253	Add Command	Cancel Command and Details
Ad Management	19578431161957843116	VF720	Special for testingVF720-1	Offline		152.168.14.107		290	Add Command	Cancel Command and Details
Ad Type	23581294042358129404	VF720	1 building 1 unit/floor room VF720	Offline	2.19.23.20041516108	152.168.10.57	20200419183742	1335	OK	Cancel Command and Details
Ad Playlog	23581570072358157007	M362	1 building 1 unit/floor room M362	Offline				252	Add Command	Cancel Command and Details
Access Control Manage...										
Guest Password										

Offline status

Smart Communi...	Home	Community	Device	Property	Visitor	Parking	Reg Data	System		
Device Management	Device Status Monitoring									
Device	Total devices 66 Online device 11 Offline device 51 No internet 4									
Device Status Monitoring	Device name	Device model	Installation location	Status	Version	IP Address	Last connection time	Commands Count	Commands Result	Operation
Real-time Data Monitoring	Frontdoor-eth012350310484	M200	1	Offline	101	121.35.2.186	20201020170238	0		Cancel Command and Details
Dev Time Usage	Gate-V5001-4801480880	A520	100	Online	V5.7.4.0	10.73.110.171	20201020170511	0	OK	Cancel Command and Details
Dev Time Strategy	Conference Room1 23500379168	M200	1	Online	104	121.35.2.186	20201020170554	0		Cancel Command and Details
Device Ad	Conference Room2 19440880053	Q2000	1	Online	110	121.35.2.186	20201020170240	462		Cancel Command and Details
Ad Management	Customer equipment3200525875	M500	Unit 1 / Floor 1	Offline				419	Add Command	Cancel Command and Details
Ad Type	Room-L00115593960	Q100	1	Offline				0	OK	Cancel Command and Details
Ad Playlog	Access control 11921941001051710	Access control	1 building 1 unit / 119 floor 1 1 building 1 unit / 119 floor 2 1 building 1 unit / 119 floor 3 1 building 1 unit / 119 floor 4	Offline				1535	Add Command	Cancel Command and Details
Access Control Manage...	Gate-gate-wifi32005030173	VF618-T	1	Offline		192.168.2.13		436	Add Command	Cancel Command and Details
Guest Password	Entrance-gate-eth032005014081	VF618-T	1	Online	2.19.23.20072715108	192.168.22.7	20201020170509	0	OK	Cancel Command and Details

Online status

8. Check the Opening Record

Smart Communi... Home Community Device Property Visitor Parking Lot Big Data System

Household Management

- Household
- Card Management
- Identity Authentication
- Community Materials
- Employee Information
- Building Unit
- Floor
- Room
- Door Management
- Report
 - Normal Open Door Records
 - Fail Open Door Records
 - Call Room Records

Normal Open Door Records

Keyword: Device SN: Name: All Open door type: All

Identity type: All Recent Time: One Week One Month Time: Start Time End Time

Search Reset

Delete Export exportCaptureImage

	Open door time	Name	Device name	Event Points	Open Door Type	Face Recognition Data	Capture
☐	2020-10-20 17:55:25	Guang Yang	Entrance gate-access (33000511430)	Entrance gate-access	Face recognition open door	Match score 92 Body Temperature 36.40	
☐	2020-10-20 16:57:30	Zhang Mengqiang	Chief Manager's Office (330005140005)	Chief Manager's Office	Open the door remotely(A PP)	None	
☒	2020-10-20 16:56:19	Zhang Mengqiang	Entrance gate-access (33000511430)	Entrance gate-access	Face recognition open door	Match score 91 Body Temperature 36.40	
☐	2020-10-20 16:20:37	Wu Jingwei	Gate#140014000001	Gate V520	Normal card opening/799162885	None	
☐	2020-10-20 16:19:56	Wu Jingwei	Gate#140014000001	Gate V520	Normal card opening/799162885	None	

Click "Community"—"Normal open door records" to view the normal opening record.

Click "Community"—"Fail open door records" to view the failed opening record.

9. View Device Information

1. Background operation

Smart Communi... Home Community Device Property Visitor Parking Lot Big Data System

Household Management

- Household
- Card Management
- Identity Authentication
- Community Materials
- Employee Information
- Building Unit
- Floor
- Room
- Door Management
- Report
 - Normal Open Door Records
 - Fail Open Door Records

Employee Information


Keyword: Please enter (household phone/ID card) Gender: All Switch Reset Read card number

Add department Add staff Import staff Export employees Department activity Delete Synchronize data to the device


Employee Information

	ID	Name	Gender	Email	Card number	Photo	Department	Create Date	Operation
☐	20141634		Male	1520519857				2020-10-16 15:20:04	Edit Delete Offline write card
☐	20002043		Male	1722782712				2020-05-16 15:14:57	Edit Delete Offline write card
☐	200010740		Female	13416840327				2020-04-17 1:10:04	Edit Delete Offline write card
☐	200016314		Male	13333754837				2020-04-14 2:18:02	Edit Delete Offline write card


(1)

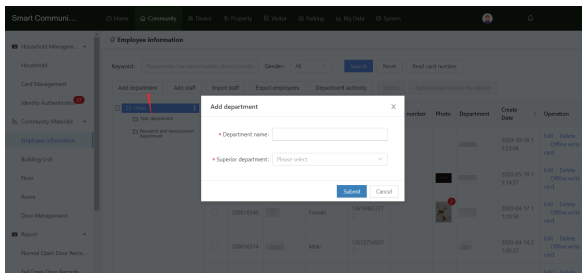


(2)

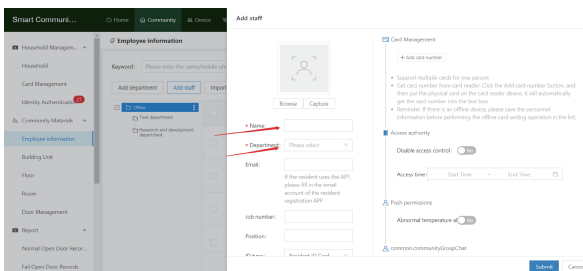

(3)

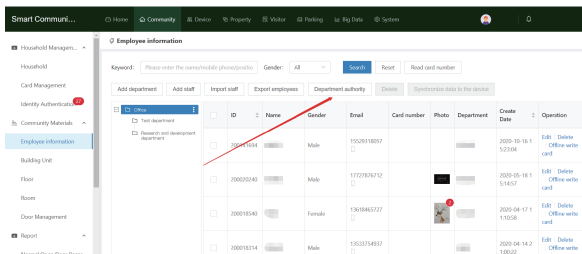


(4)

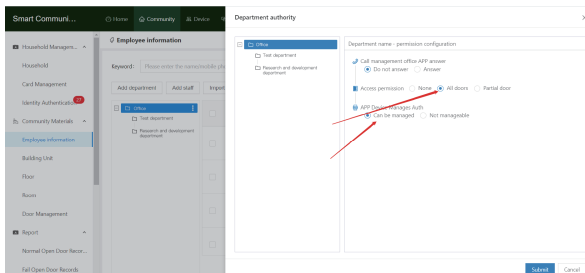


(5)

1. Click "Community"—"employee Information", as shown in figure (1).
2. Click "Add Department" in "employee Information", fill in the department name and superior department, and click "submit", as shown in figure (2).
3. Click "Add employee", fill in the employee's name, mobile phone number, department and job title, and click "submit", as shown in figure (3).
4. Click "Department authority", as shown in figure (4).
5. To configure the department permissions, click "submit", as shown in figure (5).


2.APP operation

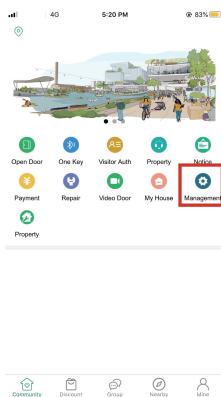


(1)

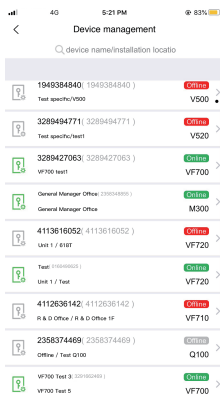

(2)

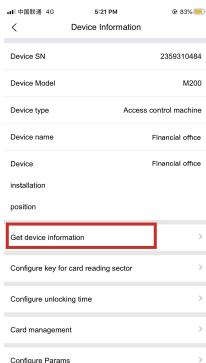

(3)




(4)

1. Click "Community"—" Management", as shown in figure (1).
2. Click on the online device, as shown in figure (2), the page shown in figure (3) will appear, open the Bluetooth of the mobile phone, click "get device information", and the page shown in figure (4) will appear. Click "re-obtain device information" to get the device information.


Note: before obtaining the device information, you need to turn on Bluetooth and the device is online; you need to be close to the device to get the information, but you can't get the device information offline.

10.Appendix

Product appearance display



Front



Back

The Company reserves the right of final change and interpretation.

