
LED 使用说明

1. 连接

1.1 布局

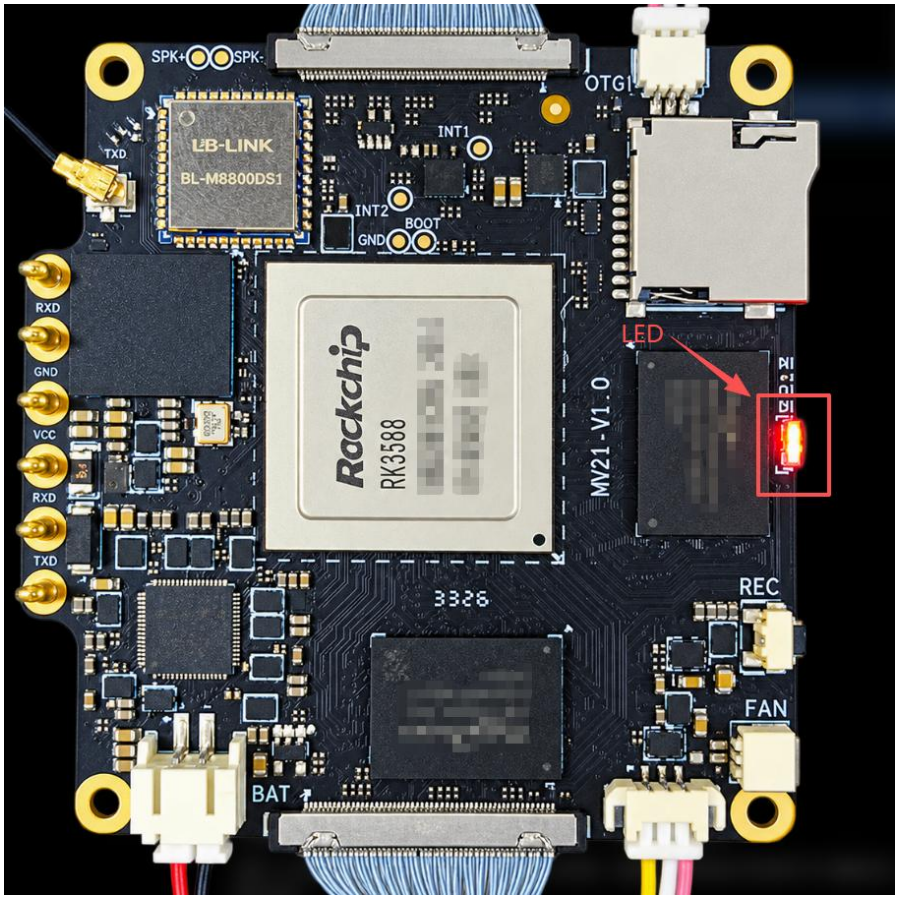

---

2. 使用 demo

2.1 测试说明

```
/sys/class/leds/user_led_r/trigger   #红灯
/sys/class/leds/user_led_g/trigger   #绿灯
/sys/class/leds/user_led_b/trigger   #蓝灯
```

亮红灯配置

```
echo none > /sys/class/leds/user_led_r/trigger
echo 1 > /sys/class/leds/user_led_r/brightness  #亮灯
echo 0 > /sys/class/leds/user_led_r/brightness  #灭灯
```

闪烁控制

```
echo timer > /sys/class/leds/user_led_r/trigger
echo 500 > /sys/class/leds/user_led_r/delay_on  #亮 500ms
echo 500 > /sys/class/leds/user_led_r/delay_off #灭 500ms
```

亮绿灯配置

```
echo none > /sys/class/leds/user_led_g/trigger
echo 1 > /sys/class/leds/user_led_g/brightness  #亮灯
echo 0 > /sys/class/leds/user_led_g/brightness  #灭灯
```

闪烁控制

```
echo timer > /sys/class/leds/user_led_g/trigger
echo 500 > /sys/class/leds/user_led_g/delay_on  #亮 500ms
echo 500 > /sys/class/leds/user_led_g/delay_off #灭 500ms
```

亮蓝灯配置

```
echo none > /sys/class/leds/user_led_b/trigger
echo 1 > /sys/class/leds/user_led_b/brightness  #亮灯
echo 0 > /sys/class/leds/user_led_b/brightness  #灭灯
```

闪烁控制

```
echo timer > /sys/class/leds/user_led_b/trigger
echo 500 > /sys/class/leds/user_led_b/delay_on  #亮 500ms
echo 500 > /sys/class/leds/user_led_b/delay_off #灭 500ms
```