

PanelView Standard 600 Terminals

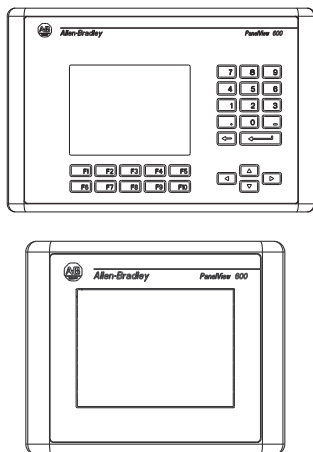


Table 5 - Technical Specifications - PanelView Standard 600 Terminals

Attribute	PanelView 600 Color 2711-K6C, 2711-B6C	PanelView 600 Color 2711-T6C
Operator input	Keypad or key/touch	Keypad
Display type	Color active matrix TFT	
Display area (WxH)	115 x 86 mm (4.54 x 3.4 in.)	115 x 87 mm (4.54 x 3.43 in.)
Resolution	320 x 234	320 x 240
Backlight	Field replaceable 50,000 hr 1/2 life at 25 °C (77 °F)	
Touch screen	Touch cells: 128 Actuation: 1 million presses	
Keypad description	Stainless steel domed membrane Keypad, navigation, function keys Actuation: 2 million presses	—
Keypad function keys	10 function keys (F1...F10)	
Real-time clock	Battery-backed clock timestamps critical data	
Battery	Field replaceable	—
Application memory	190 KB application runtime 240 KB nonvolatile memory (application objects plus text and bitmaps)	
ATA memory card	Not supported	Supported
Software	PanelBuilder32 software, runs on a personal computer	
Communication ports	EtherNet/IP, DeviceNet, ControlNet, DH+, Remote I/O, DH-485, RS-232 (DH-485), RS-232 (DF1)	
RS-232 printer port	1200, 2400, 9600, 19,200 Kbps	—
Input voltage, DC	18...32V DC (24V DC nom)	
Power consumption, DC	34 W max (1.9 A at 24V DC)	24 W max (1.0 A at 24V DC)
Input voltage, AC	85...264V AC, 47...63 Hz	—
Power consumption, AC	60VA max	—
Weight, approx.	2.0 kg (4.4 lb)	1.0 kg (2.3 lb)
Dimensions (HxWxD), approx.	192 x 290 x 116 mm 7.55 x 11.40 x 4.57 in.	152 x 185 x 96 mm 6.0 x 7.28 x 3.80 in.