



Data Highway/Data Highway Plus Asynchronous Communication Interface Module, Series D

Catalog Number 1770-KF2

Use these release notes with the Data Highway or Data Highway Plus Asynchronous (RS-232-C or RS-422-A) Interface Module User Manual, publication 1770-6.5.13, March 1989.

These release notes supersede all previous documentation updates and release notes.

Updates to the Series D

Updates to the 1770-KF2 module for Series D include the removal of UL and CSA certifications.

Applicable Standards and Certifications

The 1770-KF2 module conforms to:

- FCC Part 15, Subpart J, Class A
- DOC R.I.R. SEP, 1988
- CE

ATTENTION



Due to the removal of UL/CSA certifications, the Series D 1770-KF2 is intended to serve as a replacement for previously installed 1770-KF2 modules. For new DH+ installations that require UL/CSA, the 1785-KE would be a more appropriate substitute.

WARNING



With any complex communication system you need to identify potential application-related communication problems and make provisions in the system design to prevent hazardous or undesired consequences, if a problem occurs. These problems include, but are not limited to, the possibility of unexpected loss of communication, and erroneous or incomplete data being supplied to the network and passed on to your application.

Cabling

Series D includes additional circuit protection on the computer (asynchronous) connector, and lower power consumption. To get the full benefit of the additional circuit protection, your RS-232-C cable must conform to these requirements:


- signal ground (pin 7) must be isolated from protective ground (pin 1)
- the cable shield must be connected to protective ground (pin 1) at only one end of the cable; leave the other end unconnected

IMPORTANT

Cables using protected ground (pin 1) rather than signal ground (pin 7) may have worked with earlier revisions of the 1770-KF2 module, but will not work reliably with Series D.

The standard 25-pin RS-232-C cable connections shown on the configuration label indicate the minimum cabling requirements for RS-232-C communication between the 1770-KF2 module and a computer. They are an alternative to the connections shown in Figure 3.6b of the user manual, reproduced here as Figure 1.

Figure 1 Wiring Diagram for RS-232-C Cable

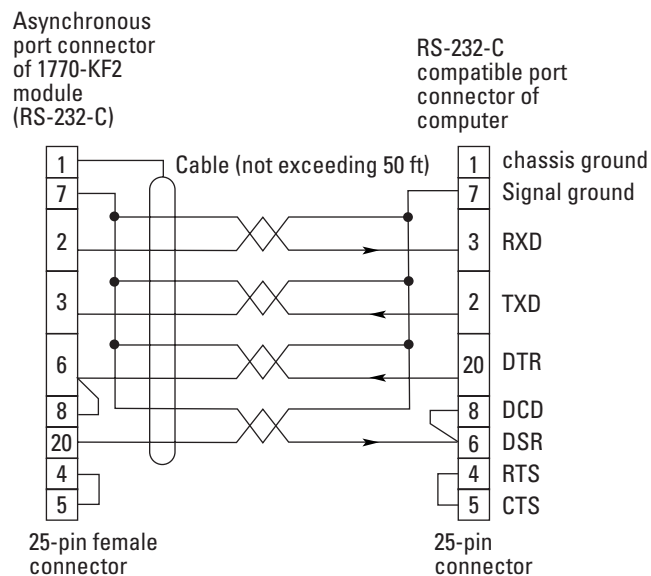

31486-M


If you have constructed or purchased a cable that meets the standards in Figure 1 or that matches the standard 25-pin RS-232-C cable connections on the configuration label, no changes in cabling are required. If your cable does not conform to these specifications, it might communicate correctly, but the effect of the improvements in the Series D hardware will be minimized.

An RS-232-C cable conforming to the pinouts shown in Figure 1, but without the twisted pairs, is supplied with the 1770-KF2 module.

Connecting the Module to a Data Highway or Data Highway Plus Network

To make twinaxial cable connections to the 1770-KF2 module, connect the 1770-CD cable to the 15-pin connector labeled Data Highway (Figure 2).

Figure 2 Connecting the Module to a Data Highway or Data Highway Plus Network

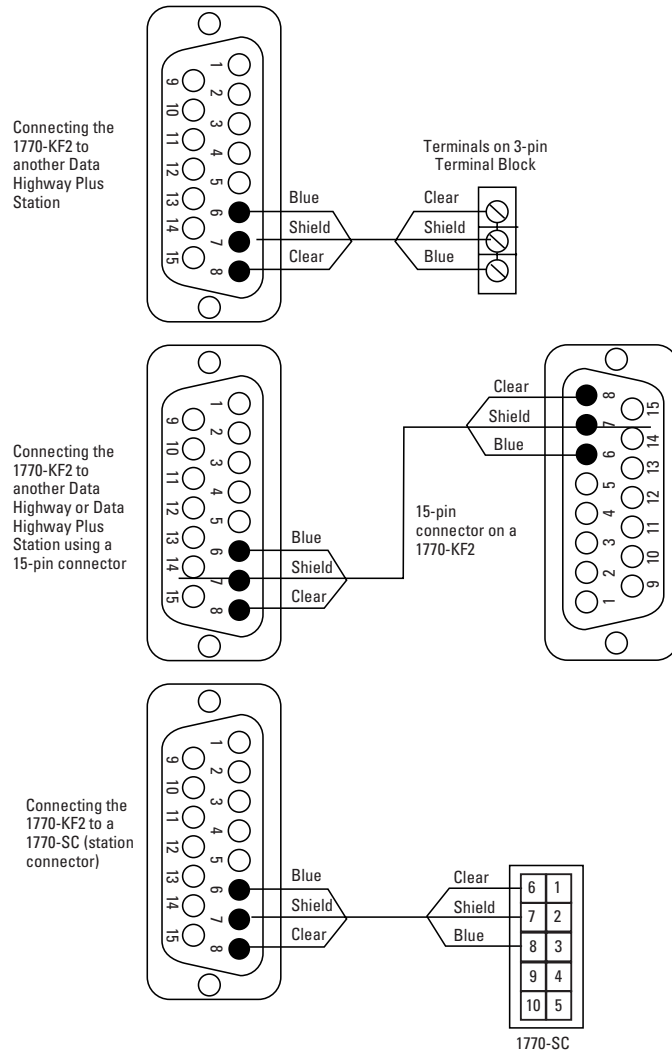

31488-M


For details on constructing the dropline, refer to the Data Highway/Data Highway Plus/Data Highway II/Data Highway-485 Cable Installation Manual, publication 1770-6.2.2, April 1994.

RS-232-A Cable Termination Resistor

The RS-422-A cable interface, as illustrated in Figure 3.6c of the user manual, may require cable termination resistors, shown in Figure 3, to ensure reliable operation. The optimum value of these resistors ranges from 90 to 150 ohms, depending on the cable type and length. Connect the resistors as close to the receiving ends of the cable as possible.

Some computers' RS-422-A compatible ports may already include this resistor, though pins may have to be jumpered to achieve the desired connections. Refer to your computer's manual for more information. If the resistor already exists on your computer port, attach an external resistor on only the 1770-KF2 end of the cable.

Figure 3 RS-422-A Wiring Diagram with Terminating Resistors

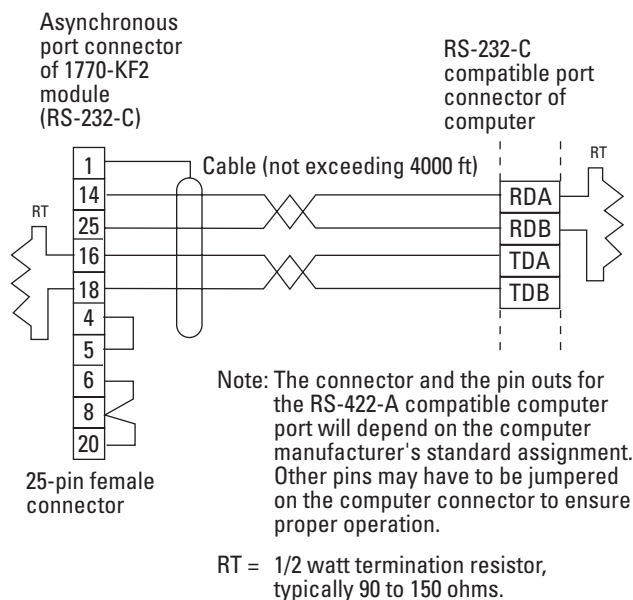

31487-M

Asynchronous Communication Rate (SW-6)

The 1770-KF2 module supports a data rate of 19,200 bits per second. Set the communication rate switches as shown in Table 1.

Table 1 Communication Rate Switch Settings

Bits Per Second	Set Switch:		
	1	2	3
110	OFF	OFF	OFF
300	ON	OFF	OFF
600	OFF	ON	OFF
1200	ON	ON	OFF
2400	OFF	OFF	ON
4800	ON	OFF	ON
9600	OFF	ON	ON
19200	ON	ON	ON

Factory Default Switch Settings

All switches are set as shown on the label on the bottom of the unit when the 1770-KF2 module is shipped.