


VersaPoint I/O Module

Input 24VDC Positive Logic 8 Points IC220MDL643

GFK-2000

November 2001

Module IC220MDL643 is used to accept 24VDC digital input signals.

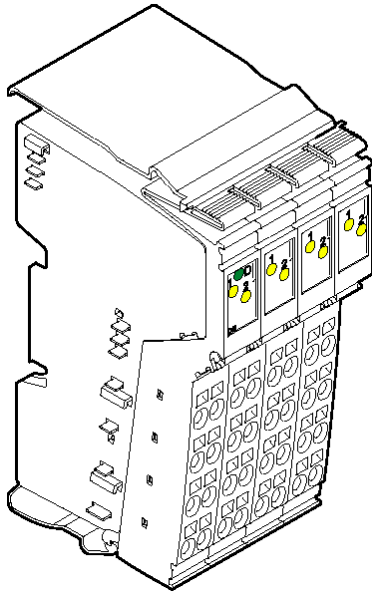

Module with the connectors plugged in

Module IC220MDL643 requires four (4) I/O Terminal Strips, IC220TBK082, ordered separately. See the ordering information below.

Features

- Connections for eight digital sensors
- Connection of 2-, 3-, and 4-wire sensors
- Maximum permissible load current per sensor: 250mA.
- Maximum permissible load current from the module: 2.0A.
- Diagnostic and status indicators

Ordering Information

IC220MDL643	Input 24VDC Positive Logic, 8 Points
IC220TBK082	I/O Terminal Strip, Spring Style, Quantity 10

Module Specifications

Housing dimensions (width x height x depth)	48.8mm x 120mm x 71.5mm (1.921in. x 4.724in. x 2.815in.)
Connection style	2-, 3-, and 4-wire
Operating temperature	-25°C to +55°C (-13°F to +131°F)
Storage temperature	-25°C to +85°C (-13°F to +185°F)
Operating humidity	5% to 90%, non-condensing
Storage humidity	5% to 90%, non-condensing
Degree of protection	IP 20 according to IEC 60529
Class of protection	Class 3 according to VDE 0106, IEC 60536

Power Consumption

Communications power U_L	7.5V
Current consumption from the local bus U_L	50mA, maximum
Power consumption from the local bus U_L	0.375W, maximum
Segment supply voltage U_S	24VDC (nominal value)
Nominal current consumption of U_S	2.0A, maximum

VersaPoint I/O Module


Input 24VDC Positive Logic 8 Points IC220MDL643

GFK-2000

November 2001

Connection Examples


The diagram below shows example connections for 4-wire (A) and 3-wire (B) sensors.

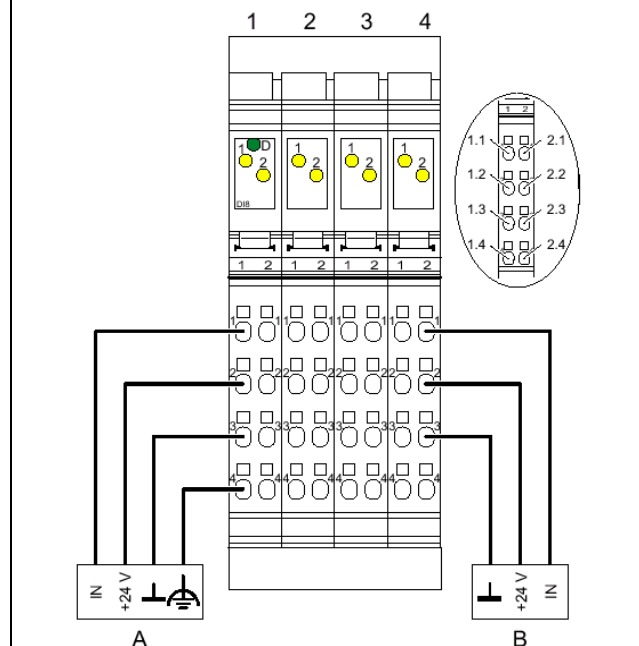

Terminals		Assignment
1.1	2.1	Signal input (IN)
1.2	2.2	Segment voltage U_S for 2-, 3-, and 3-wire termination
1.3	2.3	Ground contact (GND) for 3- and 4-wire termination
1.4	2.4	FE connection for 4-wire termination

LED	Color	Meaning
D	Green	Bus diagnostics
1, 2	Yellow	Status indication of the inputs

Internal Circuit Diagram

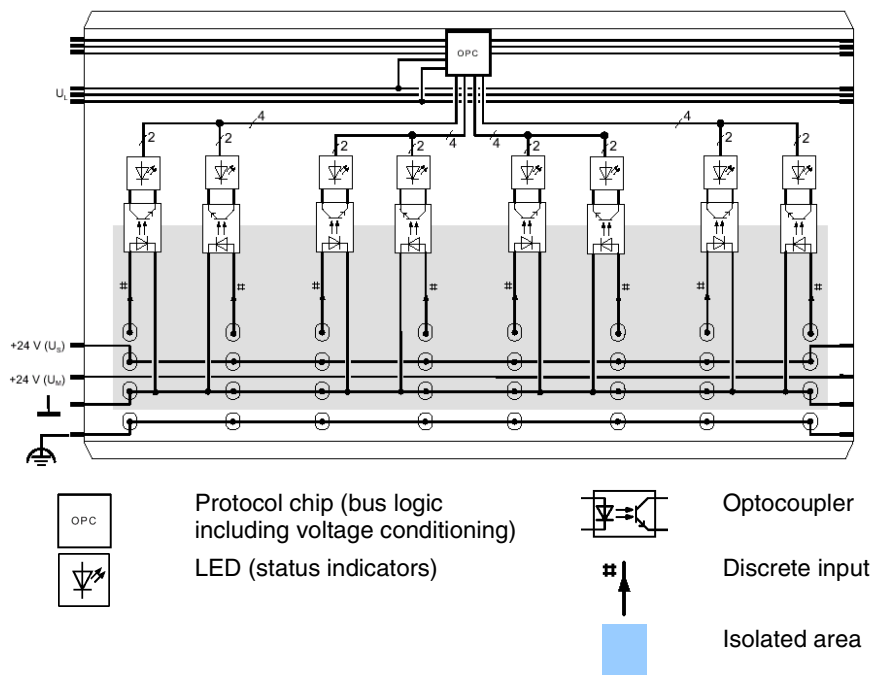

VersaPoint I/O Module
Input 24VDC Positive Logic 8 Points
IC220MDL643

GFK-2000

November 2001

Program Data

ID code	BE hex (190 decimal)
Length code	81 hex
Input address area	1 byte
Output address area	(not used)
Parameter channel (PCP)	0 bytes
Register length (bus)	1 byte

Input Specifications

Discrete Inputs	
Number	8
Input design	According to EN 61131-2, Type 1
Definition of switching thresholds	
Maximum low level voltage	$U_{lmax} < 5V$
Minimum high level voltage	$U_{hmin} > 15V$
Common potentials	Segment supply, ground
Nominal input voltage U_{IN}	24VDC
Permissible range	$-30V < U_{IN} < +30VDC$
Nominal input current U_{IN}	5mA
Delay time	None
Permissible cable length to the sensor	30m (98.4ft.) (to ensure conformance with EMC directive 89/336/EEC)
Use of AC sensors	AC sensors in the voltage range $< U_{IN}$ are limited in application. (The signal levels of the AC sensors must correspond with EN 61131-2, Type 1).

Input Characteristic Curve	
<i>Input voltage (V)</i>	<i>Typical input current (mA)</i>
$-30 < U_{IN} < 0.7$	0
3	0.4
6	1.0
9	1.7
12	2.3
15	3.0
18	3.7
21	4.4
24	5.0
27	5.7
30	6.4

VersaPoint I/O Module

Input 24VDC Positive Logic 8 Points IC220MDL643

GFK-2000

November 2001

Module Electrical Specifications

Power Dissipation	
<i>Formula to calculate the power dissipation of the electronics</i>	
$P_{tot} = 0.375 \text{ W} + \sum_{n=0}^8 \left[U_{INn} \times \frac{U_{INn} - 1.8 \text{ V}}{4400 \Omega} \right]$	
With	
P_{tot}	Total power dissipation of the module
n	Index of the number of set inputs $n = 0$ to 4
U_{INn}	Input voltage of the input n
Power dissipation of the housing P_{HOU}	0.6 W max. (within the permissible operating temperature)

Concurrent Channel Derating	
Derating	None

Safety Devices	
Overload in segment circuit	No
Surge voltage	Protective circuits of the power terminal
Polarity reversal	Protective circuits of the power terminal

Electrical Isolation
To provide electrical isolation between the logic level and the I/O area it is necessary to supply the bus module and the discrete input module using separate power supply units. Interconnection of the 24V power supplies is not allowed. (For detailed information, refer to the user manual.)

Common Potentials	
24V main power, 24V segment voltage, and GND have the same potential. FE (functional earth ground) is a separate potential.	
Separate system potentials consisting of bus module/power terminal and I/O module	
<i>Test distance</i>	<i>Test voltage</i>
5V supply incoming remote bus / 7.5V supply (bus logic)	500VAC, 50Hz, 1 min.
5V supply outgoing remote bus / 7.5V supply (bus logic)	500VAC, 50Hz, 1 min.
7.5V supply (bus logic) / 24V supply (I/O)	500VAC, 50Hz, 1 min.
24V supply (I/O) / functional earth ground	500VAC, 50Hz, 1 min.