


▣ BIA

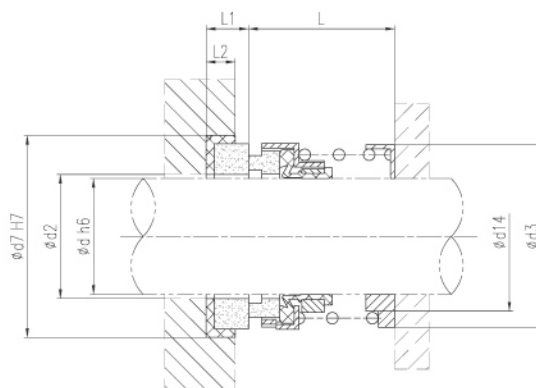

Advantages

- ▶ Self-adjust to shaft misalignment and deflection
- ▶ Allow the bellows to stretch and tighten

Application Range

- ▶ **Media:** Oil, water, weakly corrosive liquids
- ▶ **Pressure:** $\leq 1.0\text{MPa}$
- ▶ **Temperature:** -20°C to 150°C
- ▶ **Linear speed:** $\leq 10\text{m/s}$

Dimensional Data

S.D.	dh6	d14	d2	d3	d7H7	L	L1	L2
14	14	22.4	17	27	30	18.7	5	4.5
16	16	23	18	28.5	32	21	5	4.5
18	18	25.5	21	30.5	35	22.5	7.5	6
20	20	26	24	31.8	35	21	8	6.5
25	25	34	27	39	40	25.5	8	6.5
28	28	36.5	30	42	43	25.5	8	6.5
30	30	38.5	32	44	45	25.5	9	7.5
32	32	40	34	46	48	33.5	9	7.5
33	33	40.5	35	47	48	33.5	9	7.5
35	35	42.5	37	49	50	33.5	9	7.5
38	38	46.5	40	54	56	33.5	9	7.5
40	40	48	42.5	56	58	33.5	9	7.5
43	43	51	45.5	59	61	36.5	9.5	8
45	45	52.5	47.5	61	63	38	9.5	8
48	48	55.5	50.5	64	66	38	9.5	8
50	50	57	52.5	66	70	38	9.5	8
53	53	60	55.5	69	73	41	9.5	8
55	55	62	57.5	71	75	41	9.5	8
58	58	68	60.5	78	78	42	9.5	8
60	60	70	62.5	80	80	42	9.5	8
70	70	80	73	90	92	45	11	9.5
80	80	90	83	104	104	55	12	10
85	85	95	88	108	109	64.2	12	10
90	90	100	93	113	114	66.2	12	10