


UU4701

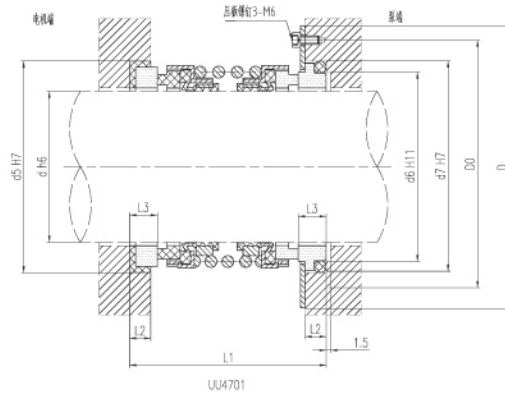

Advantages

- ▶ Back-to-back double end installation structure
- ▶ Easy to replace
- ▶ High inventory efficiency

Application Range

- ▶ **Media:** Sewage with solid particles and other general corrosive liquids
- ▶ **Pressure:** -0.05 to 0.3 MPa
- ▶ **Temperature:** -20°C to 70°C
- ▶ **Linear speed:** ≤10 m/s

Dimensional Data

S.D.	dh6	d6	d5	d0	D	d7	L	L2	L3
14	14	24	30	38	50	30	39.5	4	5
16	16	25	32	40	52	32	40	4	5
18	18	28	35	45	55	35	45	6	7.5
20	20	29	35	50	60	35	49	6.5	8
22	22	31	37	52	63	37	49	6.5	8
24	24	33	39	54	65	39	49	6.5	8
25	25	34	40	60	72	40	51	6.5	8
28	28	37	43	61	73	43	51	6.5	8
30	30	39	45	65	82	45	59	6.5	8
32	32	42	48	68	84	48	61	6.5	8
33	33	42	48	69	86	48	61	7.5	9
35	35	44	50	75	94	50	61	7.5	9
38	38	49	56	80	97	56	61	7.5	9
40	40	51	58	82	100	58	64.5	7.5	9
43	43	54	61	85	103	61	65	8	9.5
45	45	56	63	87	105	63	65	8	9.5
48	48	59	66	89	106	66	65	8	9.5
50	50	62	70	93	109	70	69.5	8	9.5
53	53	65	73	96	112	73	69.5	8	9.5
55	55	67	75	98	114	75	71	8	9.5
58	58	70	78	101	117	78	71	8	9.5
60	60	72	80	105	124	80	74.5	8	9.5
63	63	75	83	109	127	83	74.5	8	9.5
65	65	77	85	112	130	85	79	9.5	11
68	68	81	90	115	132	90	79	9.5	11
70	70	83	92	117	135	92	79	9.5	11