


▣ HQHSH-D

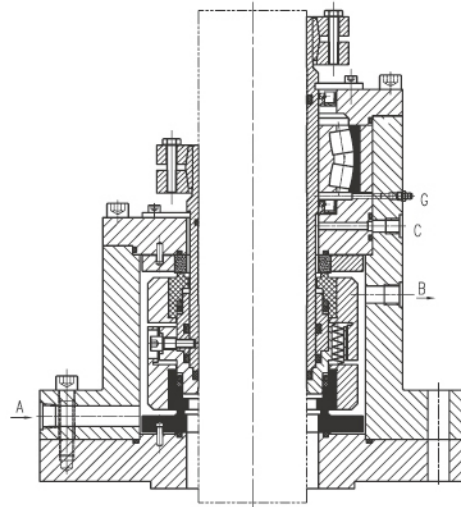

Advantages

- ▶ Complete seal assembled and tested by the manufacturer
- ▶ Flange assembly complies with DIN standards
- ▶ Option to choose with or without bearings based on actual requirements

Design Features

- ▶ Single end
- ▶ Multiple springs
- ▶ Unbalanced cartridge type

Application Range

- ▶ **Media:** Oil, water, weak acids, weak alkalis, flammable, explosive, and toxic gases
- ▶ **Pressure:** ≤1.6 MPa
- ▶ **Temperature:** -10°C to 350°C
- ▶ **Linear speed:** ≤2 m/s

Dimensional Data

DW	d1	nxd2	d3	φk	L1	L2	L3	L4
40	200	6*18	80	170	115	170	35	45
50	230	8*18	100	200	120	180	35	55
60	255	8*18	120	225	140	210	35	60
80	295	8*23	145	260	145	230	44	60
100	315	8*23	170	280	160	245	44	65
120	345	8*23	190	310	160	250	50	65
140	380	12*23	215	345	165	265	50	65
160	440	12*27	240	395	185	300	50	75
180	475	12*27	260	430	185	310	55	75
200	465	12*27	290	420	190	290	55	75