


HB35KP-D

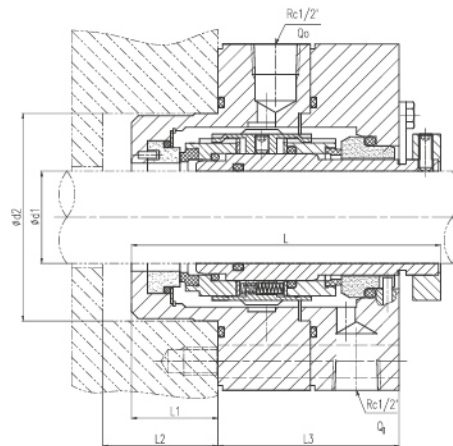

Advantages

- Universal applicability for retrofitting or original equipment
- Standardized component design
- Diverse material options
- Special materials available for metal parts

Design Features

- Double seal
- Balanced
- Rotation-independent
- API 682 compliant

Application Range

- **Media:** Flammable, explosive, toxic, and hazardous substances
- **Pressure:** 0–4 MPa
- **Temperature:** -40 °C to 220 °C
- **Linear speed:** ≤20 m/s

Dimensional Data

S.D.	d1	d2	d3	d4	d5	L	L1	L2	L3
20	20	70	105	129	14	127	30	50	79
30	30	80	115	139	14	130	33	55	79
40	40	90	125	149	14	135	38	60	79
50	50	100	140	168	18	142	38	55	85
60	60	120	160	188	18	151	47	60	85
70	70	130	170	198	18	156	52	65	85
80	80	140	180	208	18	160	56	70	85
90	90	160	205	238	22	160	46	65	95
100	100	170	215	248	22	169	55	70	95
110	110	180	225	258	22	169	55	75	95