


HB35K-T

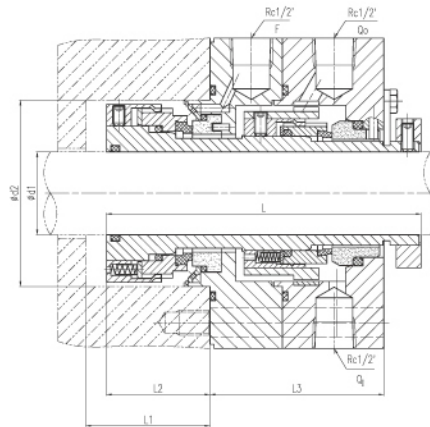

Advantages

- ▶ Torque transmission via metal on the rotating ring ensures safe operation
- ▶ Widely applicable for retrofitting or original equipment

Design Features

- ▶ Double end
- ▶ Multiple springs
- ▶ Balanced cartridge type
- ▶ Independent of rotation direction

Application Range

- ▶ **Media:** Suitable for petroleum, chemical industry, liquefied petroleum gas, weak acids, alkalis, salts, and media containing low solid content
- ▶ **Pressure:** ≤ 4 MPa
- ▶ **Temperature:** -40°C to 220°C
- ▶ **Linear speed:** ≤ 20 m/s

Dimensional Data

S.D.	d1	d2	d3	d4	d5	L	L1	L2	L3
20	20	70	105	129	14	144	50	47	79
30	30	80	115	139	14	147	55	50	79
40	40	90	125	149	14	147	60	50	79
50	50	100	140	168	18	158	55	52	88
60	60	120	160	188	18	166	60	57	90
70	70	130	170	198	18	167	65	62	90
80	80	140	180	208	18	175	70	67	90
90	90	160	205	238	22	179	65	62	98
100	100	170	215	248	22	185	70	67	98
110	110	180	225	258	22	188	75	72	98