



Specification

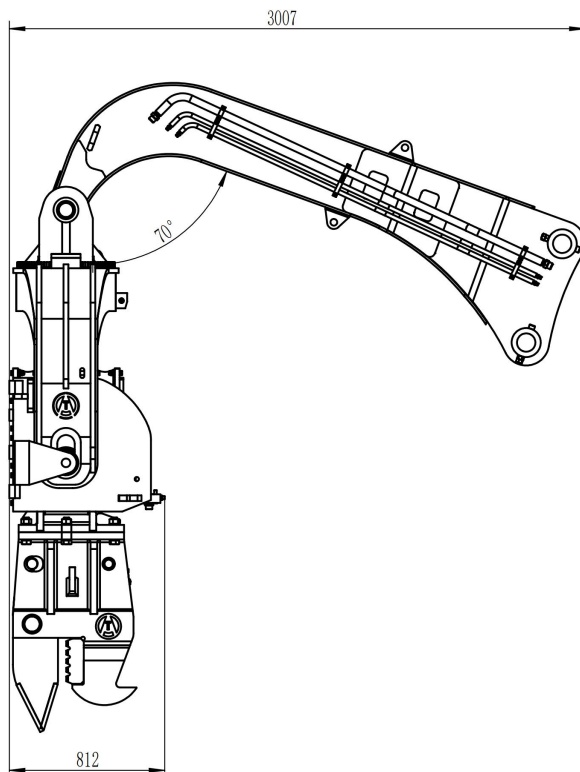

V400 SPECIFICATION

Eccentric Moment	Kgm	6.5
Max pressure	bar	320
Max. Centrifugal force	Kn	560
Frequency	Rpm	2800
Max oil flow	L/min	308
Weight (vibrator+clamp)	Kg	2700+750
L*W*H	mm	1600*740*2740
Vice arm (model/size/weight)	mm/kgs	A250/2870*680*970/890
Excavator Weight	T	35-40

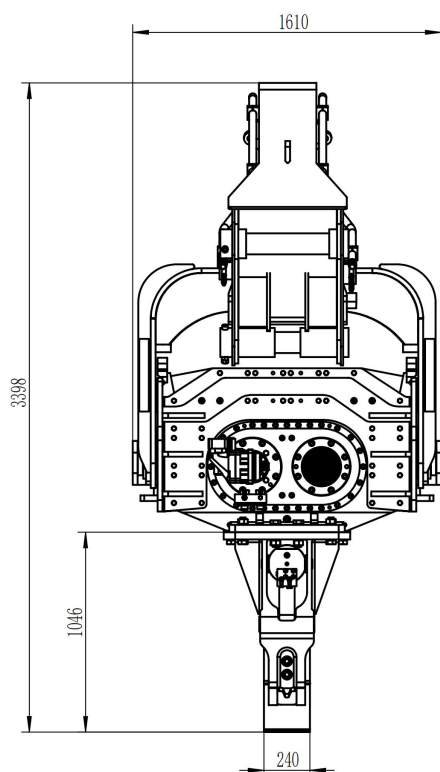

NOTE!

! Preliminary selection. When making the final selection excavator engine size and hydraulic system design (oil pump arrangement, oil flow rate/pressure etc) as well as soil and site conditions shall be taken into account.

! Specifications are subject to change without notice.



E-Mail:sales@atvibro.com Web:www.atvibro.com

Add.:No168,QinghongRoad, EhuTown, XishanDistrict, Wuxicity, JiangSu Province, China

Construction pictures:



*application: available range of piles



V400 Application:



*V400 Designed to match the capabilities of middle excavators and to combine a robust structure with excellent pile handling characteristics.

* Fitted with clamps capable of driving a wide range of piles including sheet piles, H-piles, tubular steel piles and other pile sections.

