


Auger Drill Specification

Model:TD2000~TD8000

Head

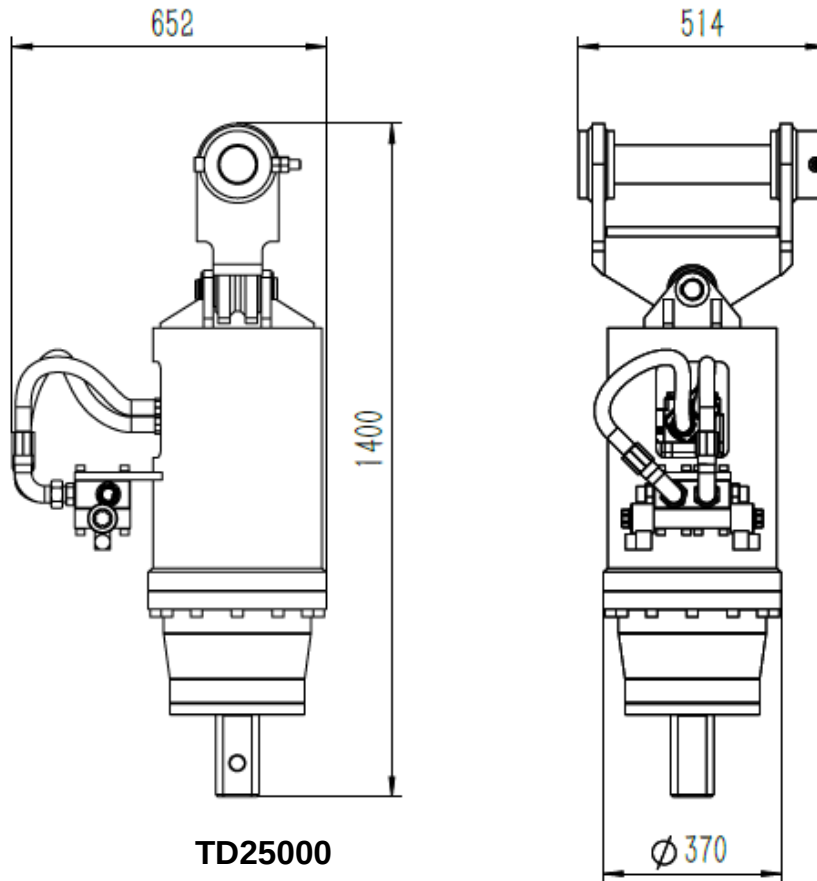

TD25000

Auger



TD2000~3500

SPECIFICATION 1

Model	Unit	TD2000	TD2500	TD3000	TD3500
Applicable Excavator	ton	1~1.5	1.5~3	2~4	2.5~4.5
Max speed	rpm	2190	2452	2900	3643
Max Torque range	nm	70-240	70-240	80-240	80-240
Oil pressure range	bar	25-57	27-65	27-75	40-85
Oil flow range	l/m	43-99	36-87	36-100	42-90
Hose/Quick coupling	bsp	1/2"	1/2"	1/2"	1/2"
Output shaft Std	mm	65	65	65	65
Head weight	kg	47.3	47.53	70.26	70.72
Head weight	mm	595	595	700	700
Head diameter	mm	200	200	238	238
Auger series		S4	S4	S4	S4
Auger length	m	1.2	1.2	1.2	1.2
Auger dia	mm	100-450	100-500	100-600	100-750



TD4500~8000

SPECIFICATION 2

Model	Unit	TD4500	TD5500	TD7000	TD8000
Applicable Excavator	ton	4~5	4.5~6	5~7	6~8
Max speed	rpm	4535	5477	6931	8152
Max Torque range	nm	80-240	80-260	80-260	80-240
Oil pressure range	bar	50-95	40-115	60-135	70-150
Oil flow range	l/m	43-81	30-87	36-81	33-70
Hose/Quick coupling	bsp	1/2"	1/2"	1/2"	1/2"
Output shaft Std	mm	65	75	75	75
Head weight	kg	71.35	108	112	116
Head weight	mm	700	780	780	780
Head diameter	mm	238	269	269	269
Auger series		S4	S5	S5	S5
Auger length	m	1.2	1.5	1.5	1.5
Auger dia	mm	100-900	150-750	150-900	150-900



NOTE! : Specifications are subject to change without notice.



E-Mail:sales@atvibro.co

Web:www.vibratoryhammer.cn

Add.:No168,QinghongRoad, EhuTown, XishanDistrict, Wuxicity, JiangSu Province, China