


RSL-L44PA Specifications

ELECTRICAL SPECIFICATIONS		
ITEM		SPEC
1	Passband Frequency	DC~44MHz
2	Insertion Loss in BW	$\leq 0.8\text{dB}$
3	VSWR	≤ 1.5
4	Attenuation	$\geq 40\text{dB}@56\sim 100\text{MHz}$
5	In/Out Impedance	50Ω
6	Interface Type	2-Pin $\phi 0.5$
7	Operating Temperature	$-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
8	L*W*H	32*14*8mm
DIMENSIONS		
 Note: Unless otherwise specified, the general tolerance is $\pm 0.1\text{mm}$		

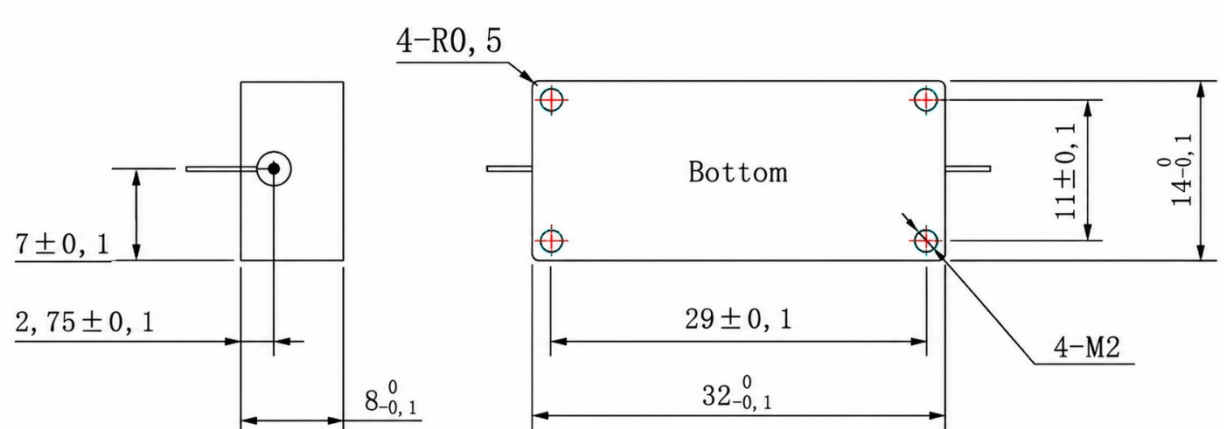