


RSL-H2400CA Specifications

ELECTRICAL SPECIFICATIONS		
ITEM		SPEC
1	Passband Frequency	2400~8400MHz
2	Insertion Loss in BW	≤1.2dB
3	Ripple in BW	<1.0dB
4	VSWR	<1.5
5	Attenuation	≥35dB@DC~2100MHz ≥25dB@2140MHz
6	In/Out Impedance	50Ω
7	Interface Type	2-SMA-K
8	Operating Temperature	-40℃ ~ 70℃
9	L*W*H	30*12*10mm

DIMENSIONS	
 The drawing shows three views of the component: a top view, a bottom view, and a side view. The top view shows a rectangular component with a width of 10⁰_{-0.1} mm and a length of 30⁰_{-0.1} mm. The bottom view shows a rectangular component with a width of 12⁰_{-0.1} mm and a length of 27 mm. The side view shows a rectangular component with a height of 9 mm and a width of 4.75 mm. The component has four mounting holes, each with a diameter of 4-M2 and a depth of 4 mm. The word 'Bottom' is written on the bottom view.	
Note: Unless otherwise specified, the general tolerance is ±0.1mm	

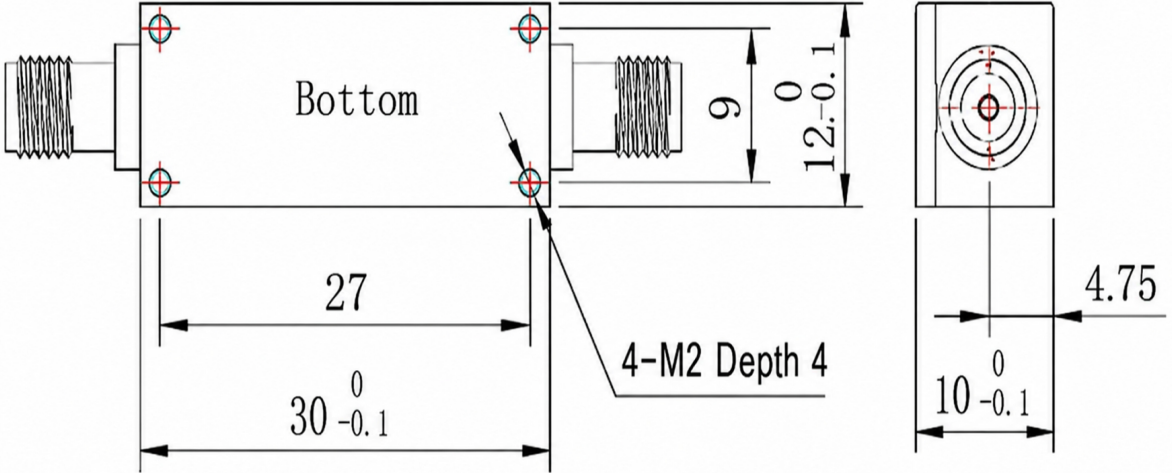