


RSL-H1300SA Specifications

ELECTRICAL SPECIFICATIONS		
ITEM		SPEC
1	Passband Frequency	1300~2300MHz
2	Insertion Loss in BW	$\leq 1.0\text{dB}$
3	VSWR	≤ 1.8
4	Attenuation	$\geq 20\text{dB}@650\sim 1150\text{MHz}$
5	In/Out Impedance	50Ω
6	Operating Temperature	$-40^{\circ}\text{C} \sim 70^{\circ}\text{C}$
7	L*W*H	20*7.9*3.8mm

DIMENSIONS		
		
■ IN/OUT ▨ GROUND Unit: mm Tolerance: $\pm 0.2\text{mm}$		

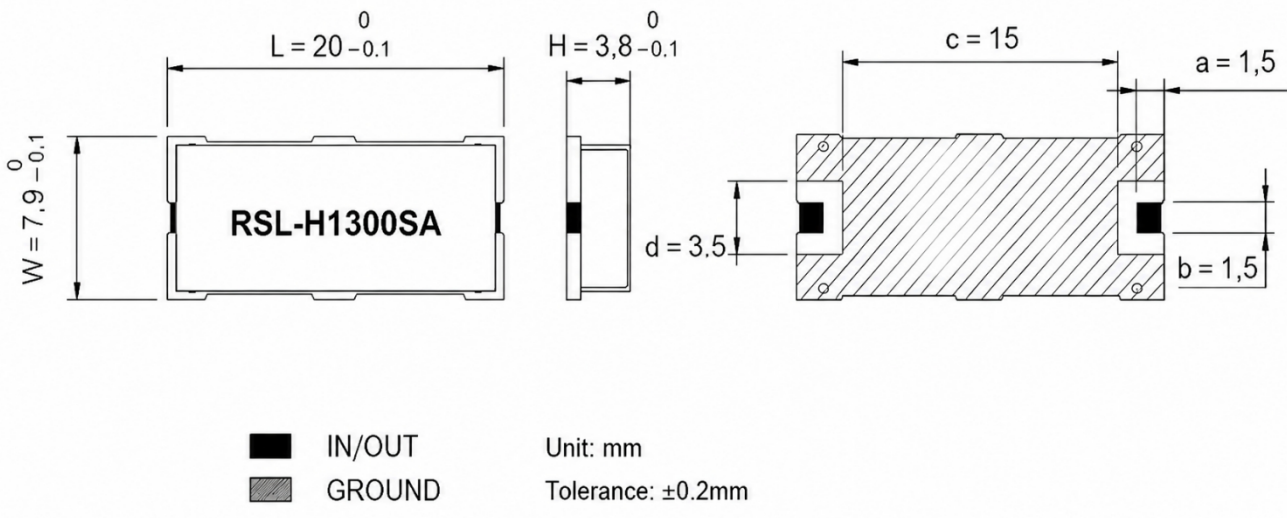