


RSL-H1050PA Specifications

ELECTRICAL SPECIFICATIONS		
ITEM		SPEC
1	Passband Frequency	1050~1520MHz
2	Insertion Loss in BW	$\leq 1.0\text{dB}$
3	VSWR	≤ 1.6
4	Attenuation	$\geq 32\text{dB}@DC\sim 960\text{MHz}$
5	In/Out Impedance	50Ω
6	Interface Type	2-Pin $\phi 0.5$
7	Operating Temperature	$-40^{\circ}\text{C} \sim 70^{\circ}\text{C}$
8	L*W*H	25*10*7mm
DIMENSIONS		
 The technical drawing shows two views of the component. The left view is a top-down perspective showing a rectangular component with four mounting holes. Dimensions include: total length $L = 25^{+0}_{-0.1}$ mm, distance from left edge to first hole $b = 22$ mm, distance between holes $a = 7$ mm, and total width $W = 10^{+0}_{-0.1}$ mm. It also indicates 4-M1.6Deep3 mounting holes. The right view is a side profile showing the height $H = 7^{+0}_{-0.1}$ mm, a central feature with width $c = 2, 8$ mm, and a base diameter $d = 5$ mm. The word 'Bottom' is labeled on the left view.		
Note: Unspecified tolerance is ± 0.1 mm		

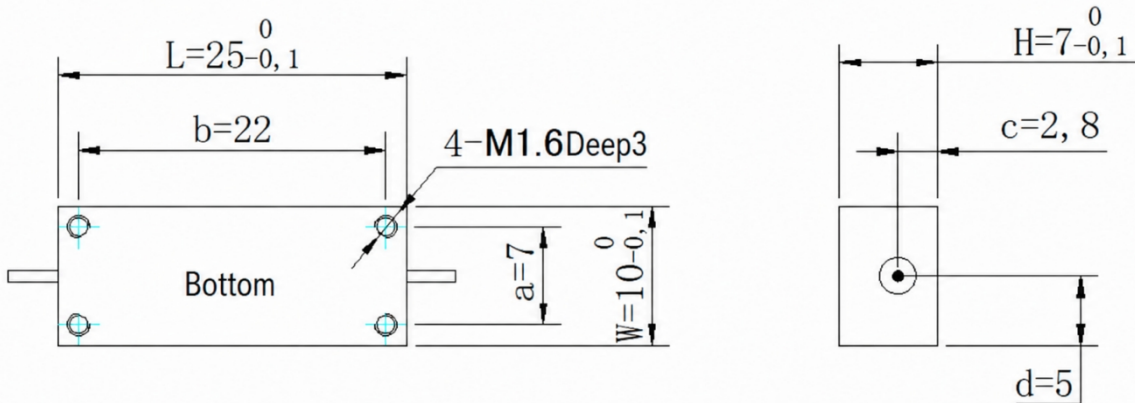