


RSL-L900SA Specifications

ELECTRICAL SPECIFICATIONS		
ITEM		SPEC
1	Passband Frequency	DC~900MHz
2	Insertion Loss in BW	$\leq 3.5\text{dB}$
3	Ripple in BW	$\leq 3.0\text{dB}$
4	VSWR	< 1.8
5	Attenuation	$\geq 20\text{dB}@930\text{MHz}$
6	In/Out Impedance	50Ω
7	Operating Temperature	$-40^{\circ}\text{C} \sim 70^{\circ}\text{C}$
8	L*W*H	12*6*4mm
DIMENSIONS		
 IN/OUT Unit: mm GROUND Tolerance: $\pm 0.2\text{mm}$ L=12, W=6, H=4⁰_{-0,1}, C=2, 5, a=1, 5, b=1, 5, 3,5		

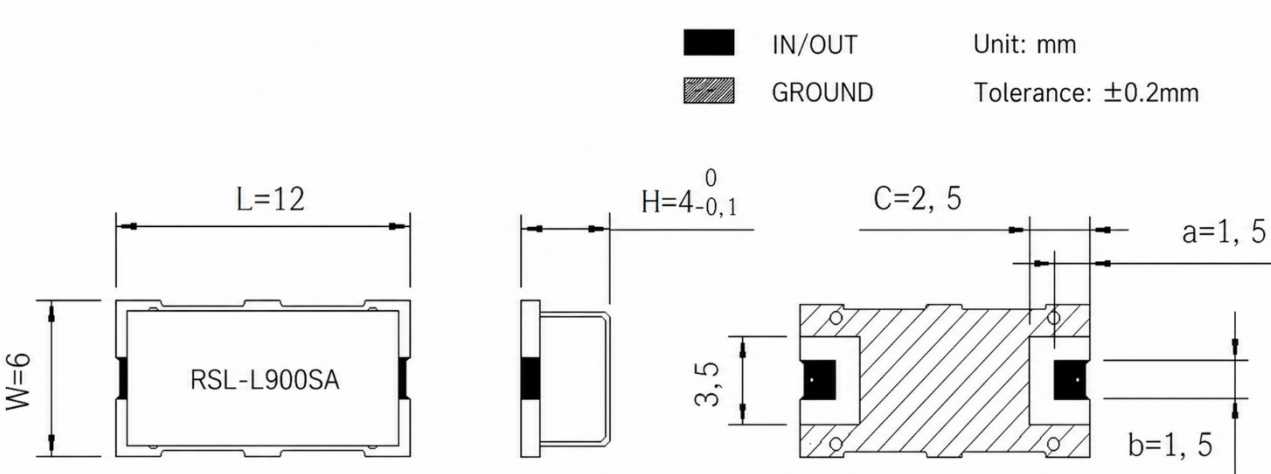