


RSL-B1200-500SA Specifications

ELECTRICAL SPECIFICATIONS		
ITEM		SPECIFICATION
1	Center frequency [f_0]	1200 MHz
2	Bandwidth [BW]	$f_0 \pm 250$ MHz [950 ~ 1450 MHz]
3	Insertion loss in BW	≤ 2.5 dB
4	Ripple	< 2.2 dB
5	VSWR in BW (S11, S22)	$\leq 1.8:1$
6	Attenuation	≥ 67 dB @ DC ~ 650 MHz ≥ 67 dB @ 1750 ~ 3000 MHz
7	Input/output impedance	50 Ω
8	Operating temperature	-40 °C~70 °C
9	L*W*H	20*7.9*3.8mm
DIMENSIONS		
 IN/OUT GROUND Unit: mm Tolerance: ± 0.2mm		

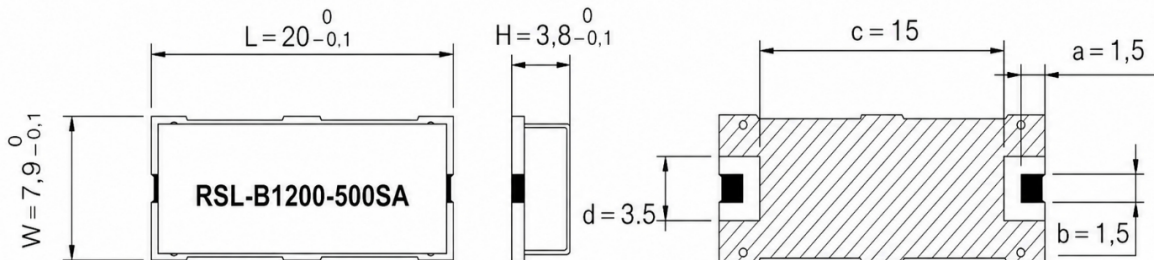