


RSN2050S100FCA Specifications

ELECTRICAL SPECIFICATIONS		
ITEM		SPECIFICATION
1	Center frequency [f_0]	2050 MHz
2	Bandwidth [BW]	$f_0 \pm 50$ MHz [2000 ~ 2100 MHz]
3	Insertion loss in BW	≤ 2.5 dB
4	Ripple in BW	< 0.8 dB
5	VSWR	$\leq 1.5:1$
7	Attenuation	≥ 65 dB @2200~ 2300 MHz
8	Input/output impedance	50 Ω
9	Operating temperature	-40 °C~70 °C
DIMENSIONS		
 UNIT: mm TOLERANCE: ± 0.3mm		

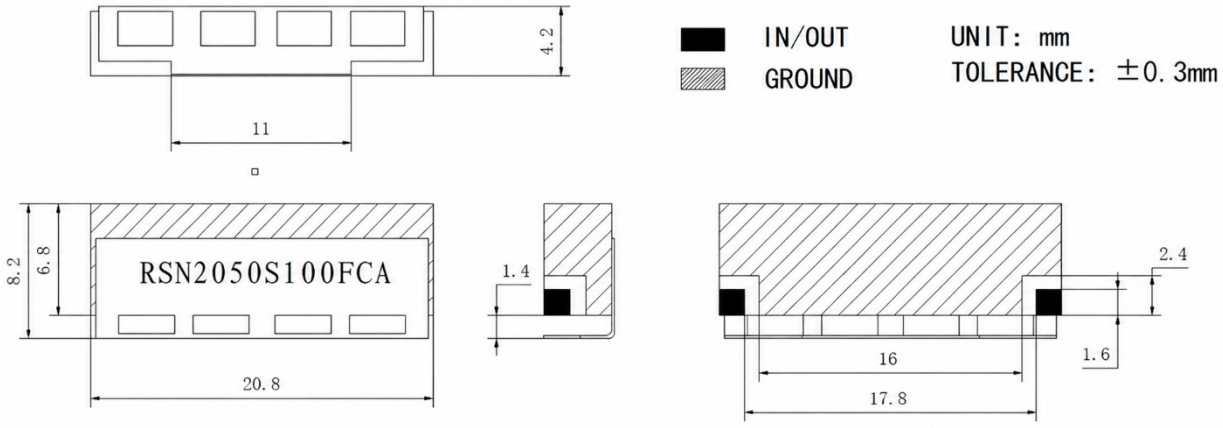