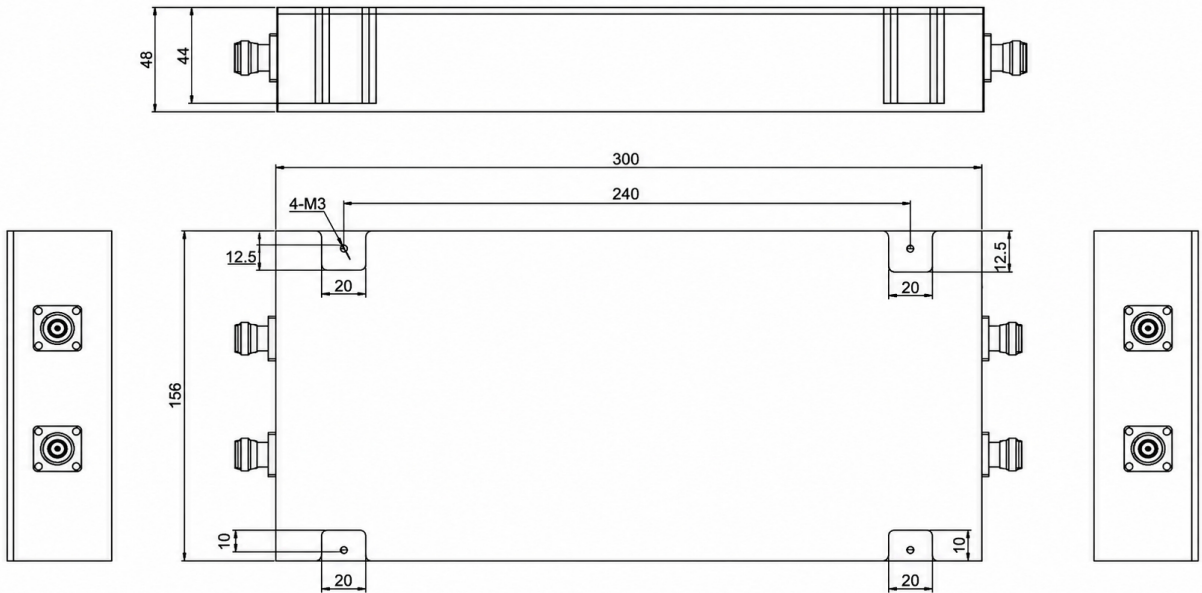


RSC-2B1075-250CA Specifications

ELECTRICAL SPECIFICATIONS		
ITEM		SPEC
1	Channel	2
2	Frequency Range	950~1200MHz
3	Bandwidth [BW]	250MHz
4	VSWR	≤ 1.5
5	Insertion Loss	$\leq 1.2\text{dB}$
6	Attenuation	$\geq 40\text{dB}@DC\sim 944\text{MHz}$ $\geq 30\text{dB}@1206\sim 3000\text{MHz}$
7	Peak Power Handling	1000W
8	In/Out Impedance	50 Ω
9	Operating Temperature	-55 $^{\circ}\text{C}\sim 70^{\circ}\text{C}$
DIMENSIONS		
 Technical drawing of the RSC-2B1075-250CA device showing dimensions in mm: - Top view: Overall width 300, mounting hole spacing 240, mounting hole diameter 4-M3, mounting hole offset 12.5, mounting hole diameter 20. - Side view: Overall height 48, mounting hole offset 44. - Front view: Overall height 156, mounting hole offset 10, mounting hole diameter 20.		

CHARACTERISTICS