



125kW_{PCS} / 261kWh_{BATTERY}

Liquid Cooling Commercial & Industrial Energy Storage System



Safe and Reliable

Lithium Iron Phosphate (LFP) battery cells, real-time online diagnosis, multi-level fuse protection, multiple fire-fighting systems, and system-level physical isolation.



Easy Deployment

All-in-one highly integrated design;
Factory pre-assembly design significantly reduces on-site installation complexity.




Worry-Free Expansion


Modular design enables multi-system expansion without the need for overall system modification.



Intelligent Operation and Maintenance

Cloud-edge collaboration technology enables remote real-time system monitoring and unmanned real-time supervision.

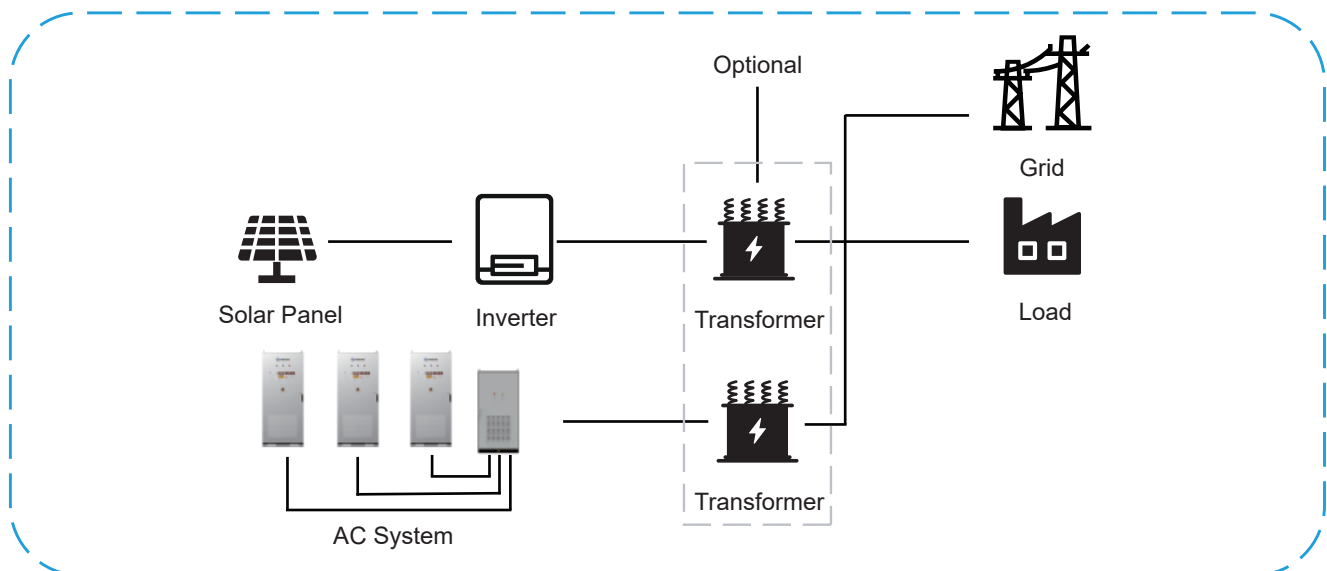

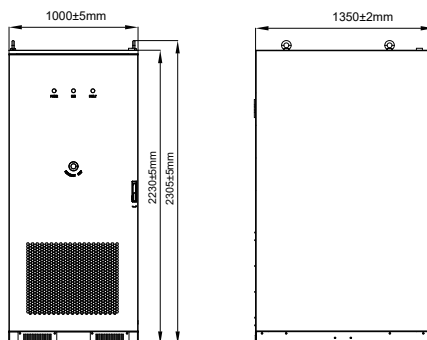


Model		SKTESS261-125K
DC	Battery Type	LiFePO4
	Nominal Capacity	314Ah
	Battery Configuration	1P260S
	Nominal Energy	261.248kWh
	Nominal Voltage	832V
	Operating Voltage Range	702~936V
	Max.Continuous Charge / Discharge Current	157A
	Charge / Discharge Rate	0.5P
	Max. Charge-discharge Efficiency	93%
	Cycle Life	≥ 6000 (@25°C ± 2°C , 0.5P / 0.5P, 70% EOL)
	Standard Charge / Discharge Current	157A
	Fire Protection System	Aerosol
AC Output	Rated Charge / Discharge Power	125kW
	Max Charge / Discharge Power	137kW(@RT≤40°C)
	Maimum Overload Capacity	1.2P 1min
	Rated Charge / Discharge Current	180A
	Rated Output / Grid Voltage	400V
	Allowed Grid Voltage Range	400V±15% On-grid , ±3% Off-grid
	Allowed Grid Frequency	50 / 60Hz
	Voltage Harmonic Distorion	<3%@Linear Load
	Grid Type	3P / N / PE
	Power Factor	-0.99~+0.99
System	Cooling Method	Intelligent Air Cooling
	Ingress Protection	IP54
	Anti-Corrosion Grade	C3
	Max. System Efficiency	86%
	Charge Operating Temperature	0°C ~55°C
	Discharge Operating Temperature	-20°C~55°C
	Operating Temperature Range	-20°C~55°C
	Relative Humidity	0-95%(non-condensing)
	Max. Working Altitude	3000m(>2000m derating)
	Communication	RS485 / Ethernet
	Cooling	Liquid Cooling
	Dimension	1000±2*1350±2*2230±5mm
	Net Weight	2500±100kg
	Max. Parallel	6 pcs (off-grid)
	System Certification	IEC 6219, IEC 63056 , EN 62477 , EN IEC 61000 , UN38. 3

Packing Configuration

Single Dimension	1506×1176×2490.3mm
Container	40'HQ
Pieces per Container	10

40'HQ

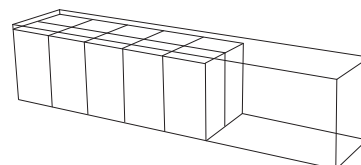

10
PIECES
CONTAINER