

GLOBULE

目录	CONTENTS
蛋糕生产线 Cake production line	03
汉堡土司生产线 Hamburger/toast bread production line	05
称量立式包装系统整合方案 Integration program for vertical weighing packing system	07
枕式包装供料系统 Horizontal feeding system	09
螺旋机系列 Spiral conveyor series	10
斗式提升机系列 Vertical lifter conveyor series	12
工程塑料网带提升机系列 Engineering plastic belts lifter series	13
螺旋输送机 Spiral conveyor	14
螺旋冷却塔使用调查表 Survey Form for the Use of Spiral Cooling Towers	16

企业通过CE认证
Enterprise has passed CE certification.

企业通过ISO9001:2000质量管理体系认证
Enterprise has passed ISO9001:2000 quality management certification.



专业规划、设计、制造、安装、自动化系统整合提供商
We are the manufacture who has the professional planning, design, manufacture, installation, transmission system.




永续经营 诚信服务 持续发展
Perennial trading Reliable service Constant development

首者道之用 阐述理法之精
太哉泛之宇 结技业缘之博



蛋糕生产线
Cake production line

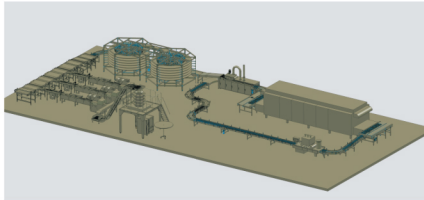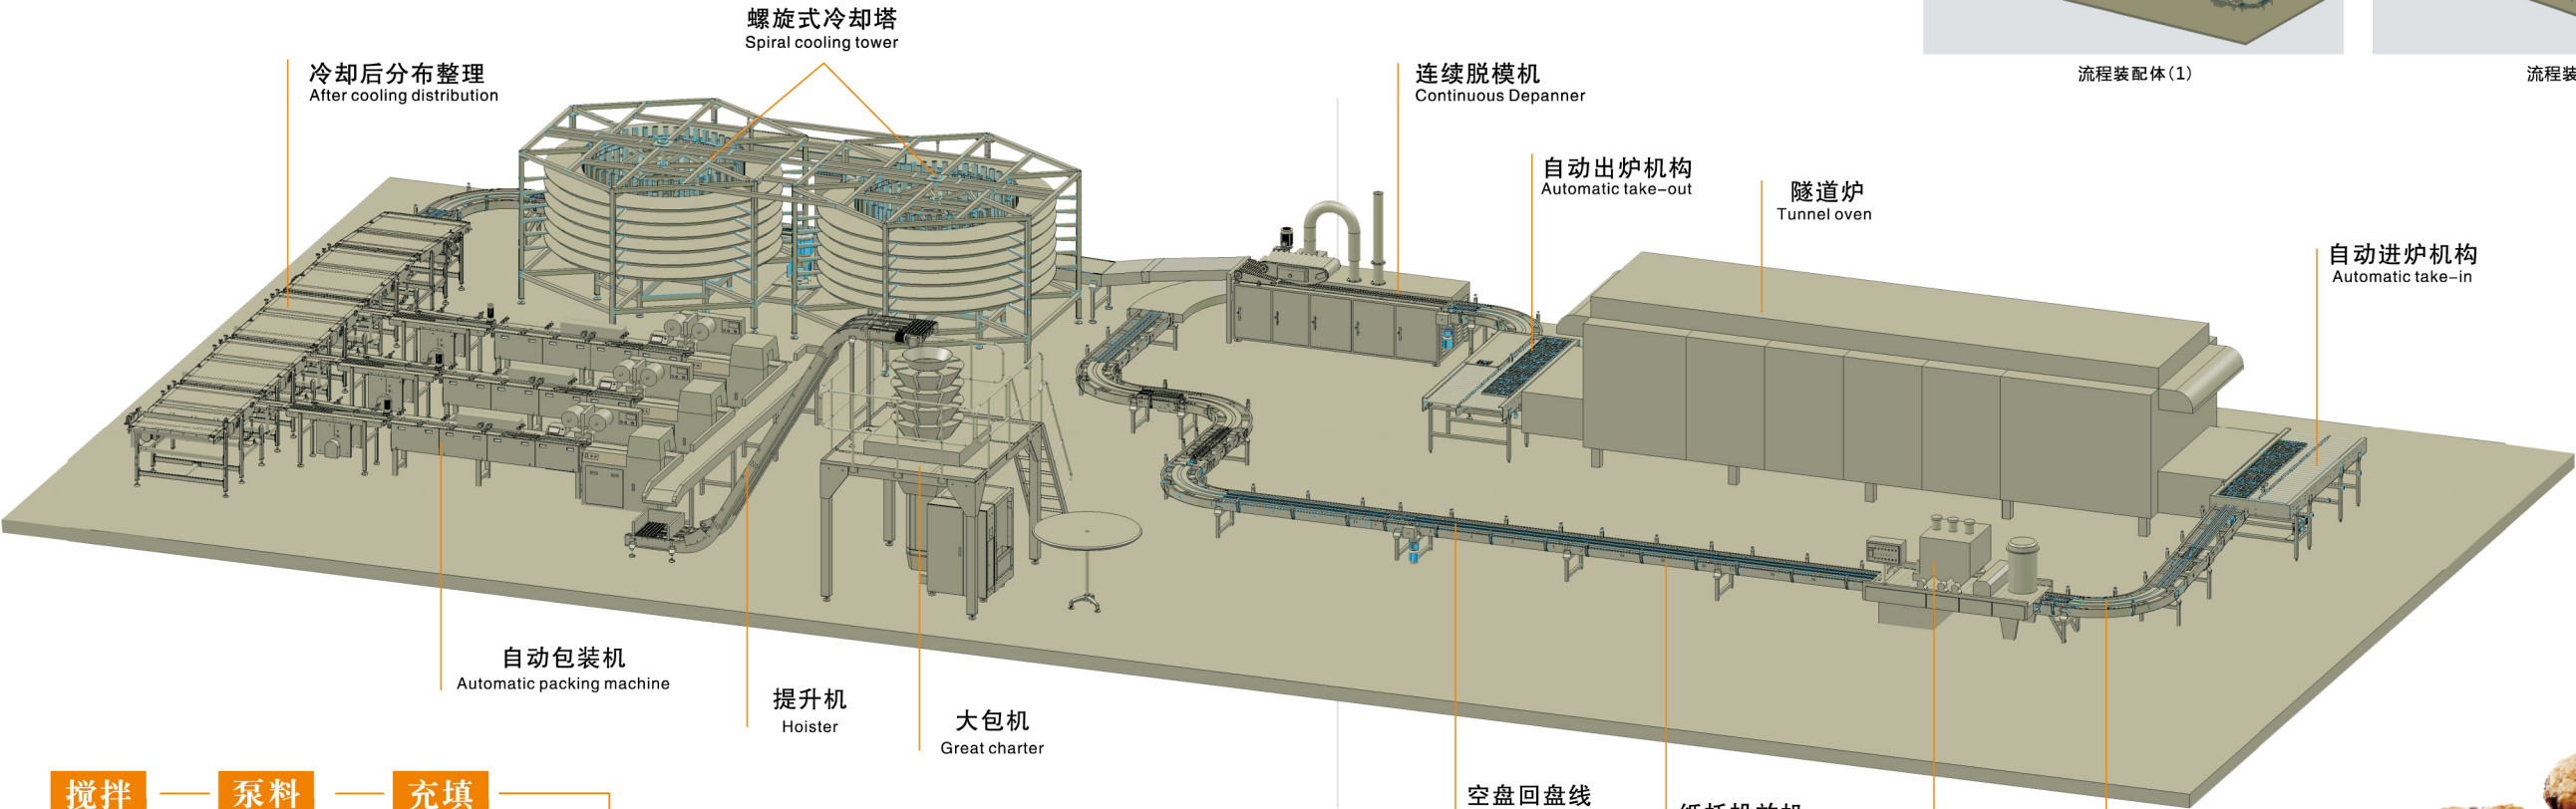

流程装配体 (1)

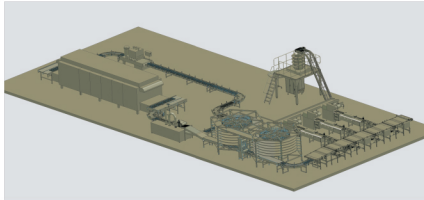

流程装配体 (2)

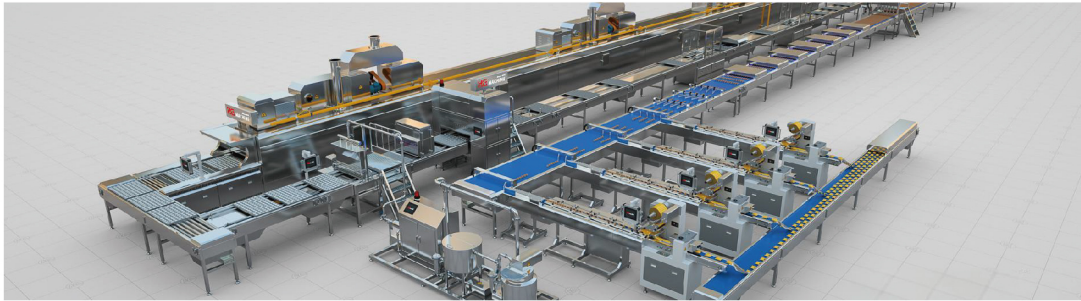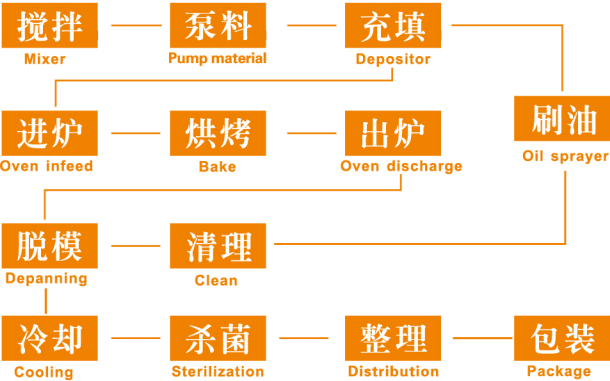

称量立式包装系统整合方案

Integration program for vertical weighing packing system

计量设备 Measuring equipments system





提升设备 Upgrade equipment



给料输送机 Send materials carriers



检测设备系列 Inspection equipments system

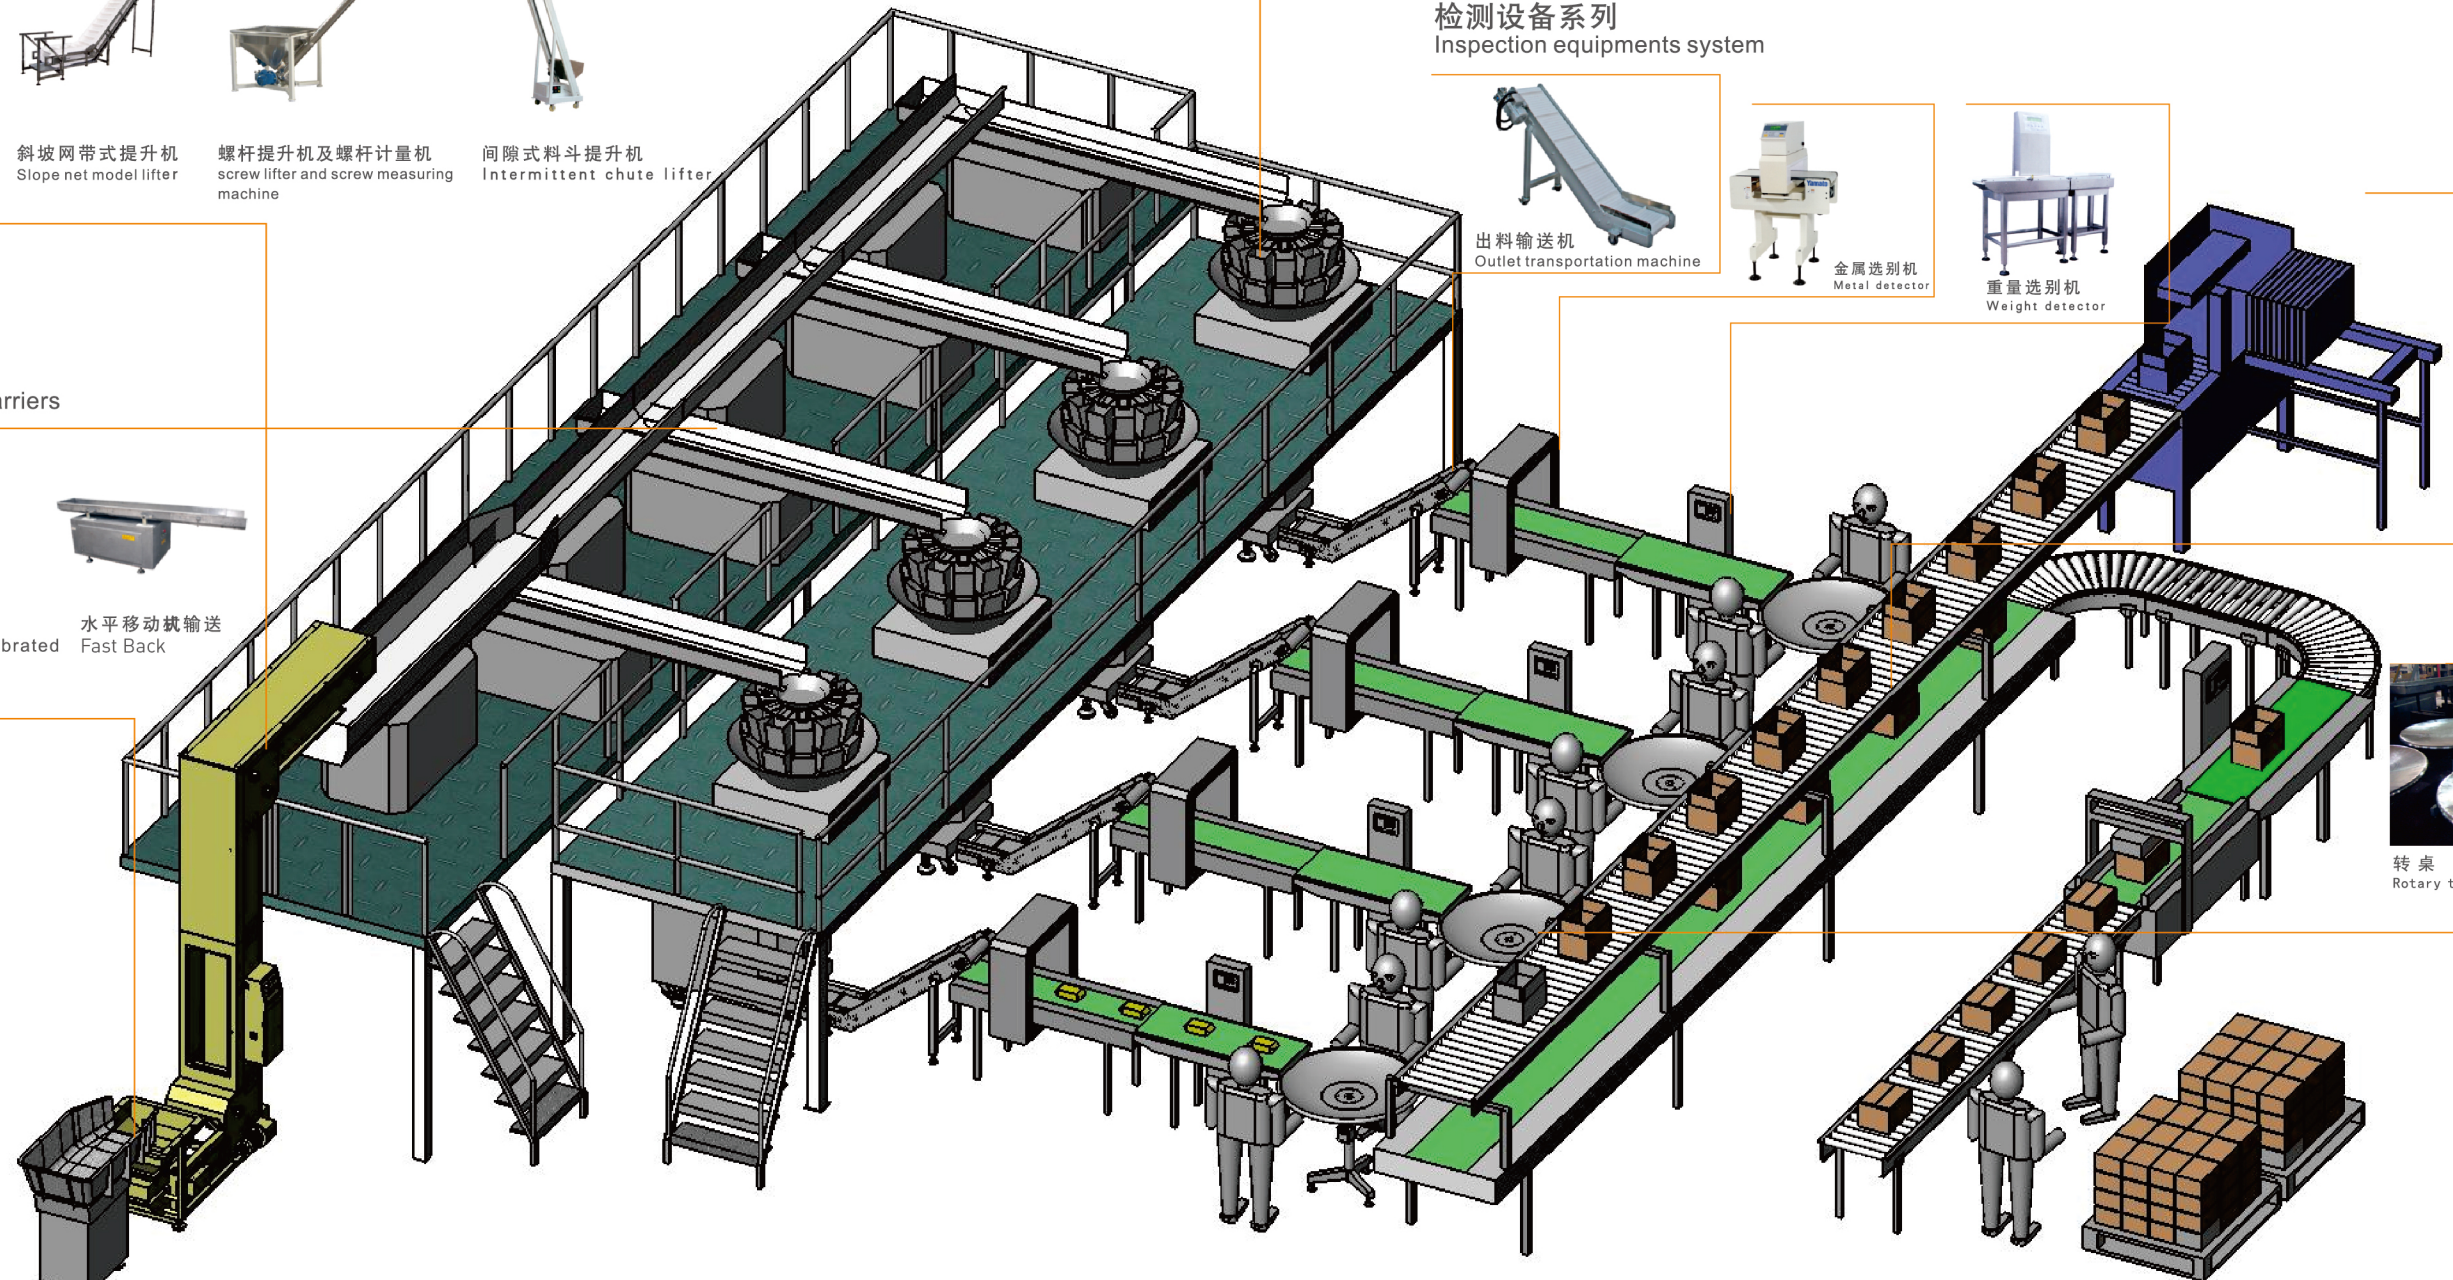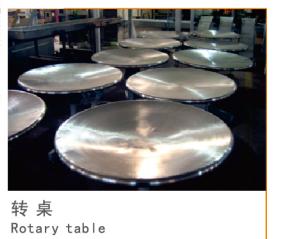

抛弃烦琐的人工工序，迈入自动化包装的世界，带来的不仅是人员的节约更带给客户高效率的回报。

Leaving fussy manual working processes and then walking into a world of automated packing brings not only the save of manpower but also the high efficient return to the customers.

斗式提升机系列
Vertical lifter conveyor series

HLT-100A 斗式提升输送机
HLT-100A Bucket lifter


提升高度:1.5M-15M Lifting height: 1.5M-15M
配套动力:0.75-2.2Kw Configured power: 0.75-2.2Kw
使用提升斗:1.8 L Bucket: 1.8 L
输送量:6立方米/小时 Conveyor quantity: 6 cubic meters per hour

HLT-300A 斗式提升输送机
HLT-300A Bucket lifter

提升高度:1.5M-15M Lifting height: 1.5M-15M
配套动力:0.75-2.2Kw Configured power: 0.75-2.2Kw
使用提升斗:4 L Bucket: 4 L
输送量:12立方米/小时 Conveyor quantity: 12 cubic meters per hour

HLT-600A 斗式提升输送机
HLT-600A Bucket lifter

提升高度:1.5M-15M Lifting height: 1.5M-15M
配套动力:0.75-2.2Kw Configured power: 0.75-2.2Kw
使用提升斗:6 L Bucket: 6 L
输送量:20立方米/小时 Conveyor quantity: 20 cubic meters per hour

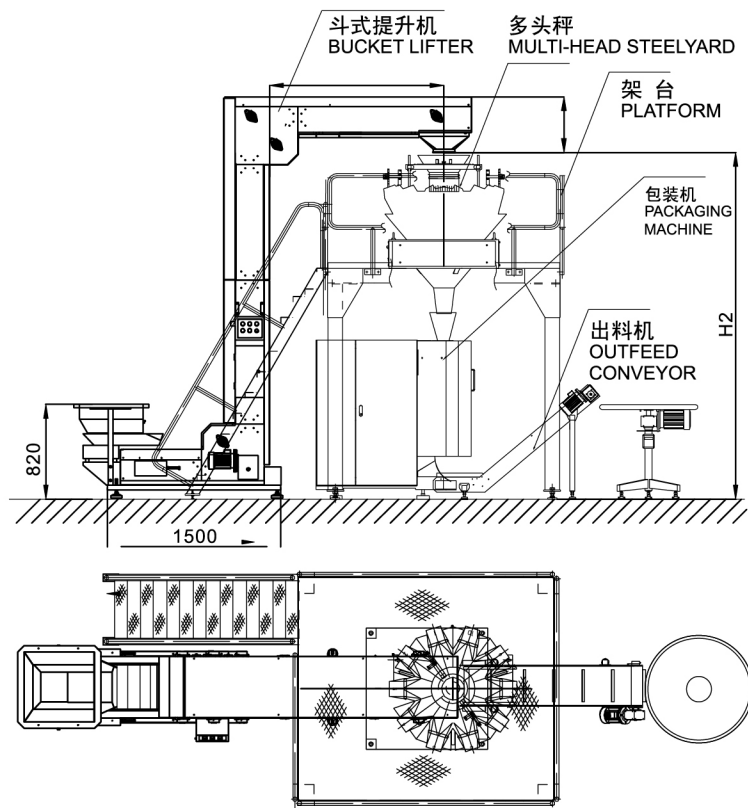

产品说明:

斗式提升输送机, 适用于低处往高处提升, 被输送物料通过振动台进入料斗后机器自动向上循环提升输送。与该机配套各类立式包装机、电脑计量机等, 广泛适用于食品工业、医药工业、化学工业及螺帽、螺丝等行业。根据现场物料传送量可调节传送速度, 并随需选择提升的高度。

产品特点:



- (1)垂直提升, 输送角度为90度, 节省占地面积, 降低动力损耗。
- (2)采用料斗承载物料、无撒落、适合小颗粒、薄片及粉状等物料输送

Products instruction:

Bucket lifter can transport material from bottom to top position. While the materials go into the buckets through vibration, the lifter upwards transports the material. Configure with packing machine, computer steelyard. It is widely used in food, medicine, chemical and screw nut and screws industries. Adjust the transporting speed according to the transporting quantity. Also operator can adjust the lifting height.

Products features:


- (1)Vertical lifting, 90° transporting angle which can save covered area and reduce power cost.
- (2)Adopt buckets to load material, no scattered, suit for transporting power and granule materials.

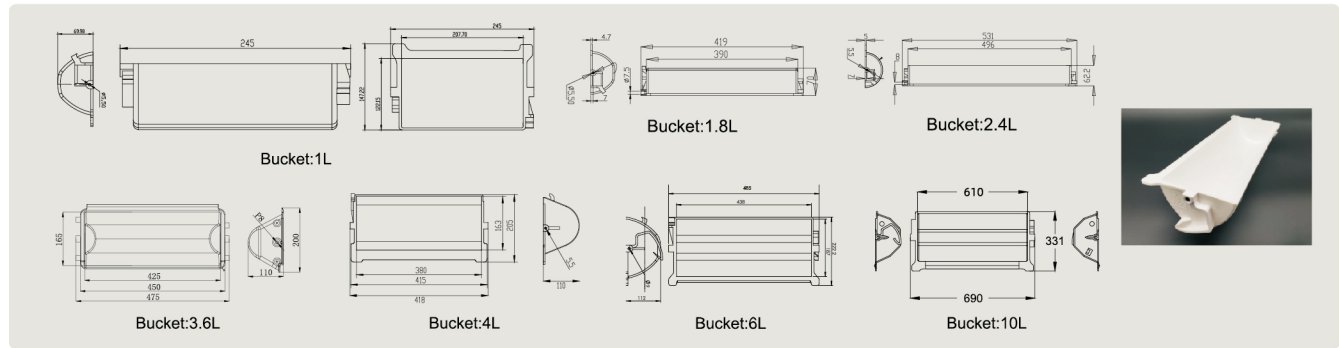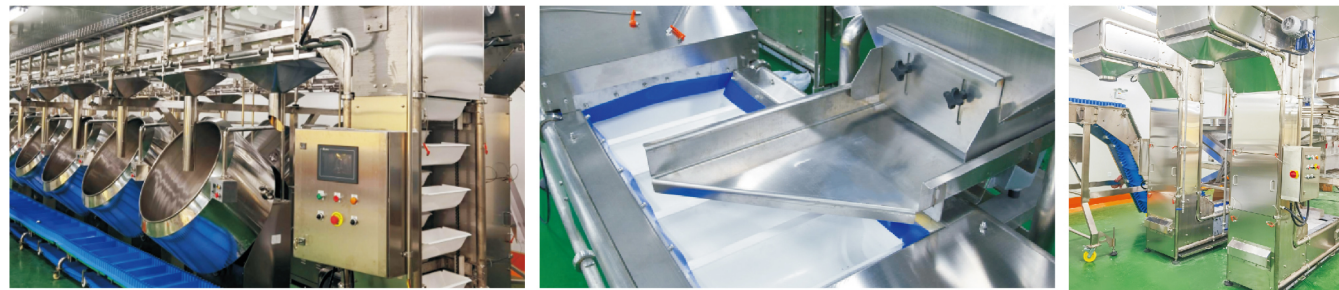

工程塑料网带提升机系列
Engineering plastic belts lifter series

HLM-QX200 工程塑料模块网带提升输送机

HLM-QX200 Engineering plastic module net-belt lifting conveyor

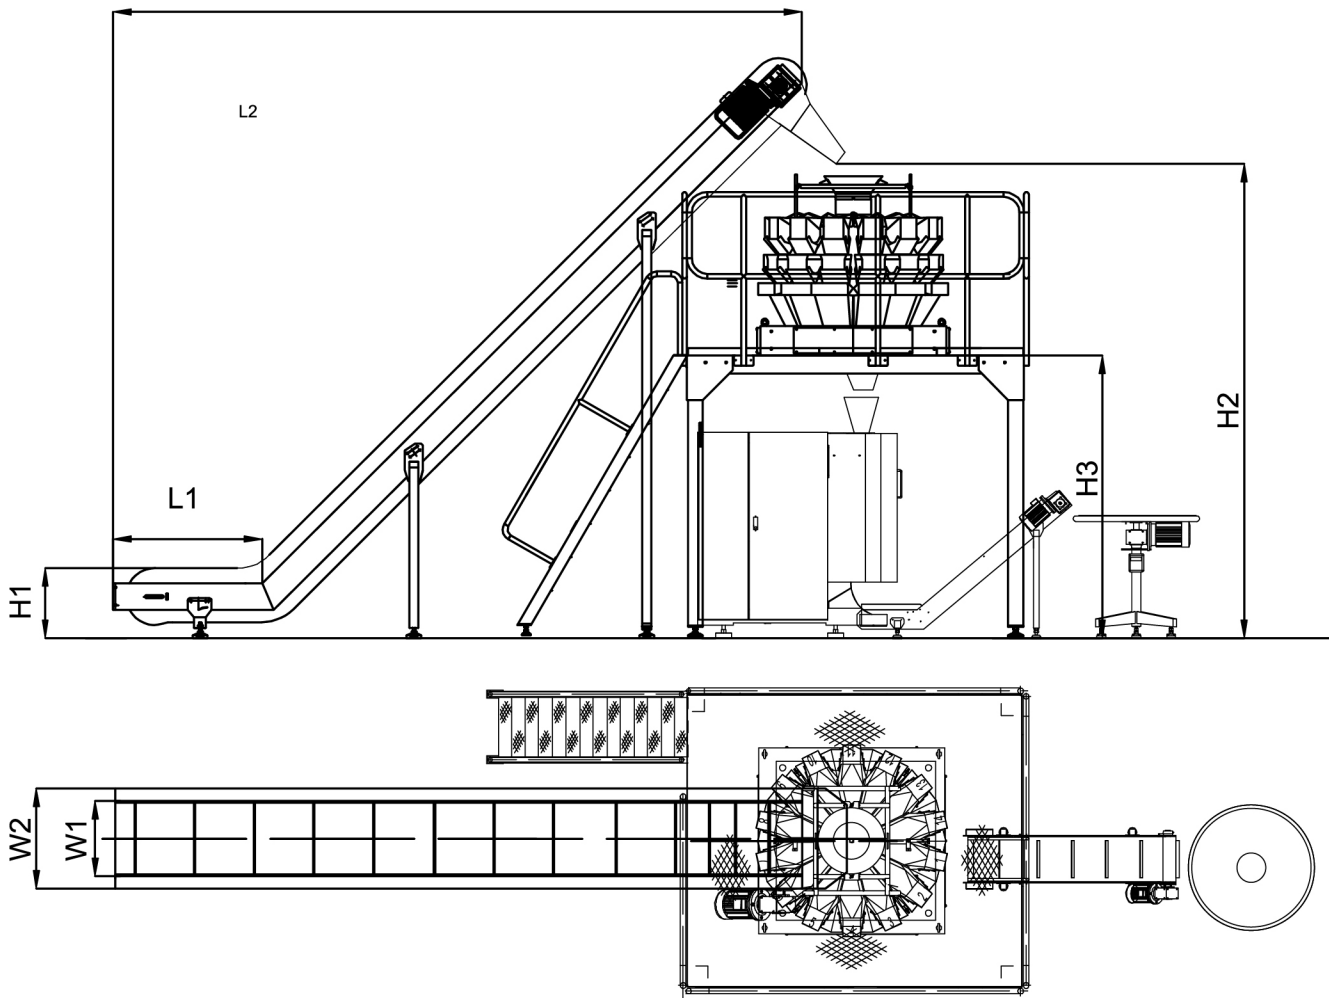

产品说明:

模块网带式提升输送机, 适用于低处往高处斜坡提升。广泛适用于食品工业、医药工业、化学工业及螺帽、螺丝等行业。根据现场物料传送量可调节传送速度, 并随需选择提升的高度。

产品特点:

- (1)斜坡式提升输送, 输送量大, 流动性好。
- (2)采用开放式框架结构、清洁、不宜结尘。

Products instruction:

This machine can transport material from bottom to top position with a slope. It is widely used in food, medicine, chemical and screw nut and screws industries. Adjust the transporting speed according to the transporting quantity. Also operator can adjust the lifting height.

Products features:

- (1)Slope lifting, big transporting quantity and good fluidity.
- (2)Adopt an open-frame structure, improve the requirement of sanitation. It can avoid dust.



B型挡板
B model baffle

英寸 in	mm
1	25
2	50
3	76
4	101
6	152



钩形挡板
Hooked model baffle


英寸 in	mm
3	76
4	101
6	152



裙边
Side guard

英寸 in	mm
2	50
3	76
4	101





皮带提升机系列
Incline conveyor series

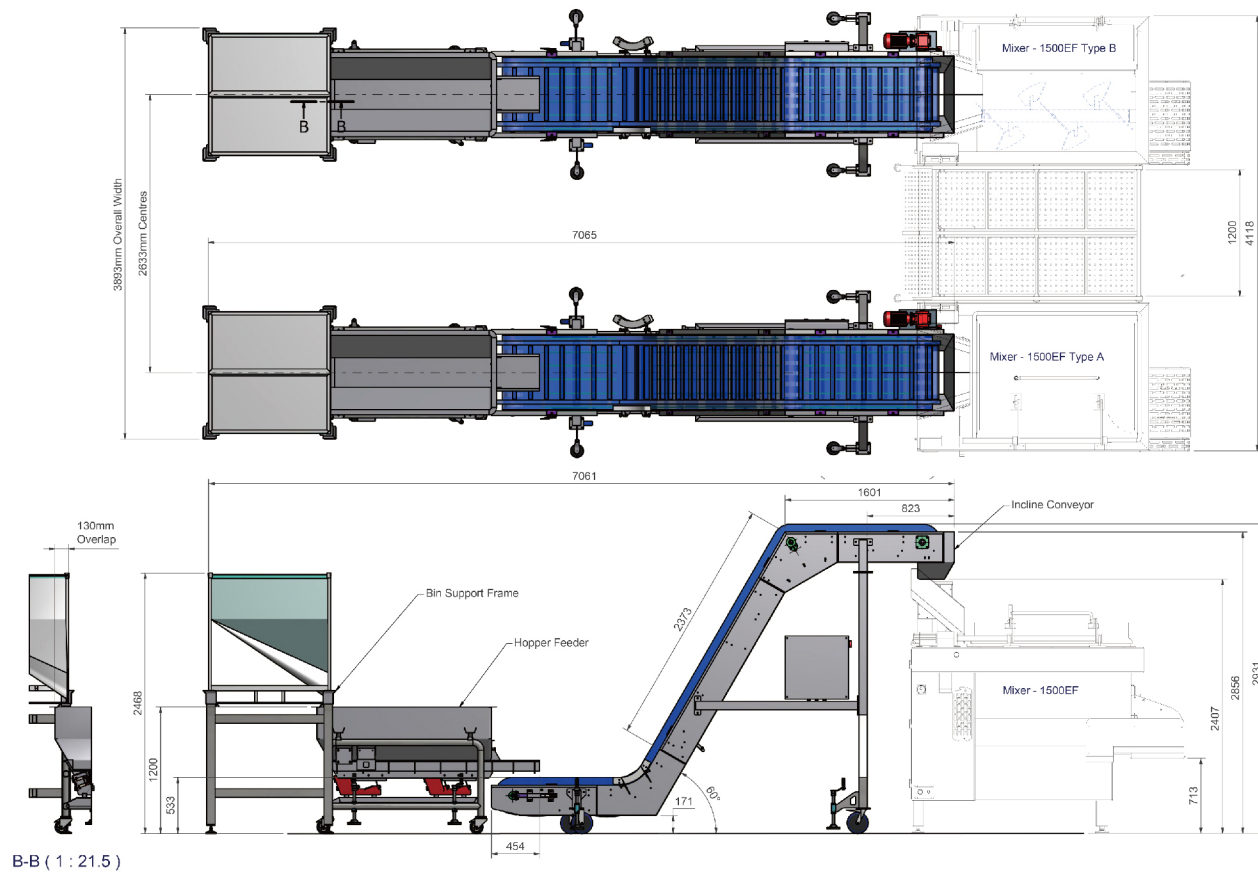

螺旋机系列
Spiral conveyor series

螺旋机使用介绍
Spiral conveyor series


产品上下输送、冷却缓存空间问题的解决
Solution to products up and down transportation,
the cooling buffer space

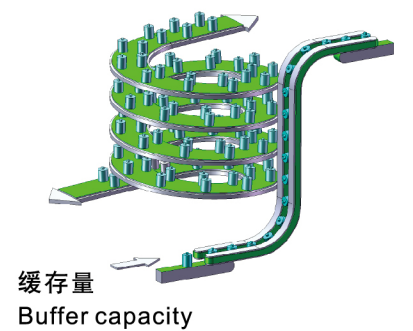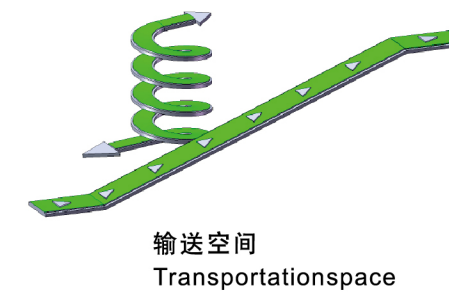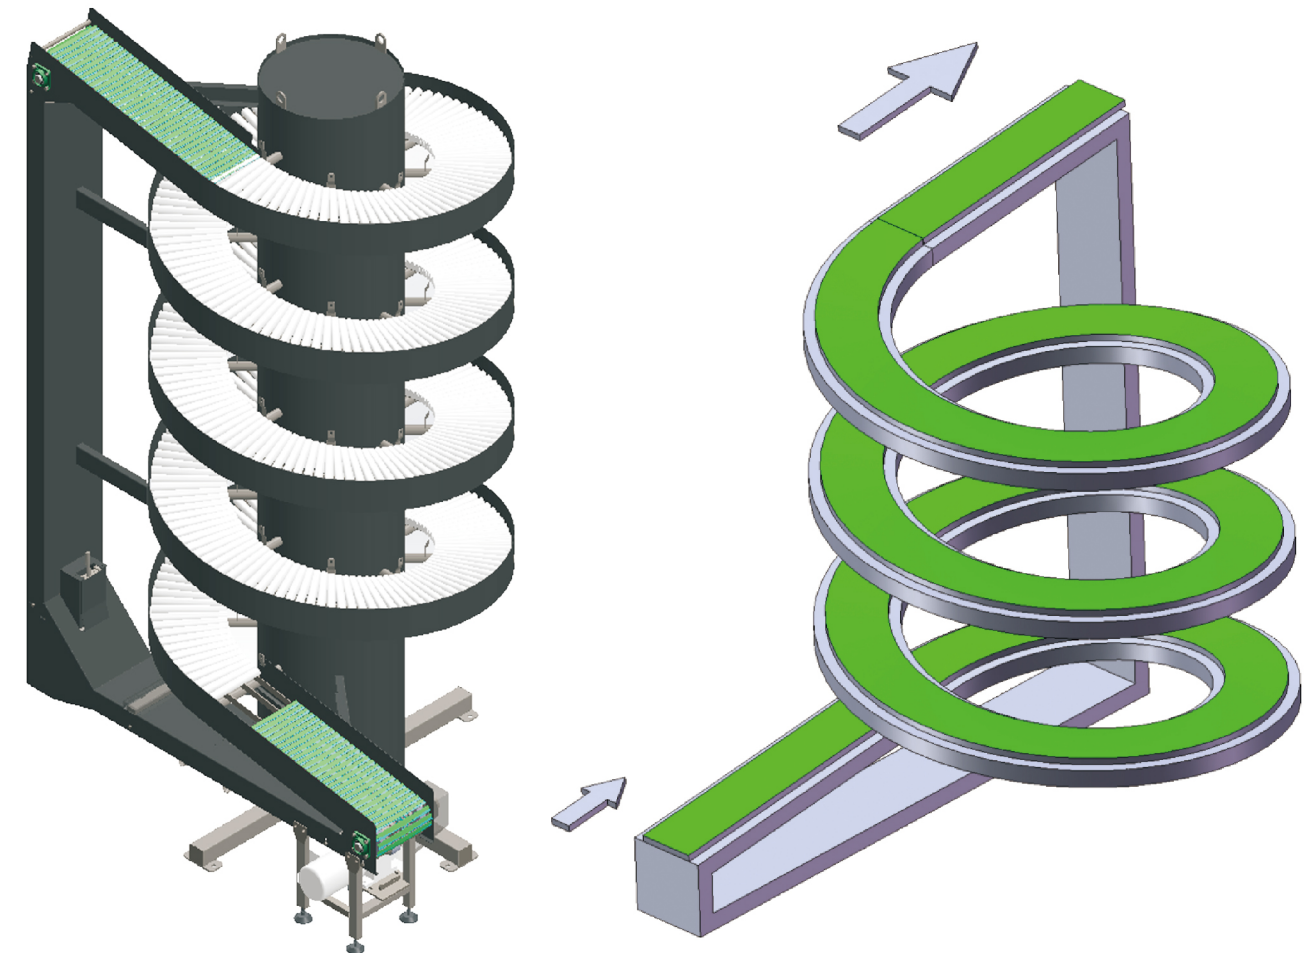


螺旋机系列 Spiral conveyor series

螺旋提升机使用调查表 Questionnaires for spiral lifter use 运载物 (请打√) Transporting products (Please mark √)

包装类型 Packaging types

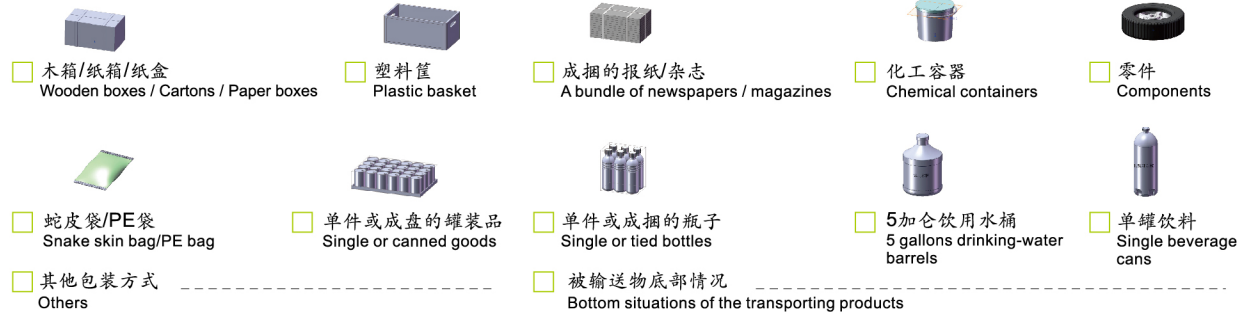

包装材料 Packaging material




☐ 输送物尺寸(mm) (L×W×H) Outer Dimension
 Min ____ X ____ X ____ Max ____ X ____ X ____

☐ 输送物重量(kg) Weight
 Min ____ kg/pcs Max ____ kg/pcs ____ kg/pcs ____ kg/pcs

☐ 输送量(件) Transportation quantity
 Min ____ pcs/min Max ____ pcs/min ____ pcs/min ____ pcs/min

☐ 缓存数量(件/平方数) Cache quantity
☐ 缓存时间(h) Cache time

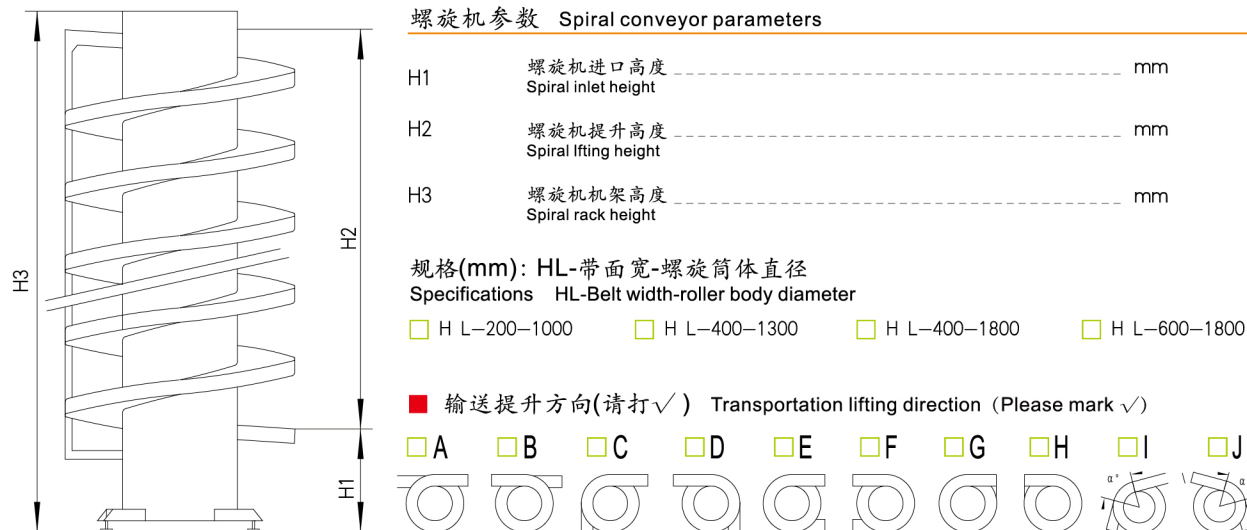


螺旋机系列 Spiral conveyor series

螺旋输送机具有的特点:

- * 连续不间断的产品输送, 多用途
- * 很高的输送量且输送性能的可靠稳定
- * 拥有良好的投资成本的性价比, 适用输送范围很广
- * 占地面积小, 节省空间
- * 特殊的设计方式, 即使三班工作时间也拥有很低的维护成本


Features of Spiral Conveyor:

- * Uninterrupted transportation of products, with multi-purpose.
- * With high throughput and also stable and reliable transportation performance.
- * Have a good cost-effective of investment costs, have a wide range of applications
- * Save covered area.
- * With a unique design, even in three shifts working conditions also has a very low maintenance costs.

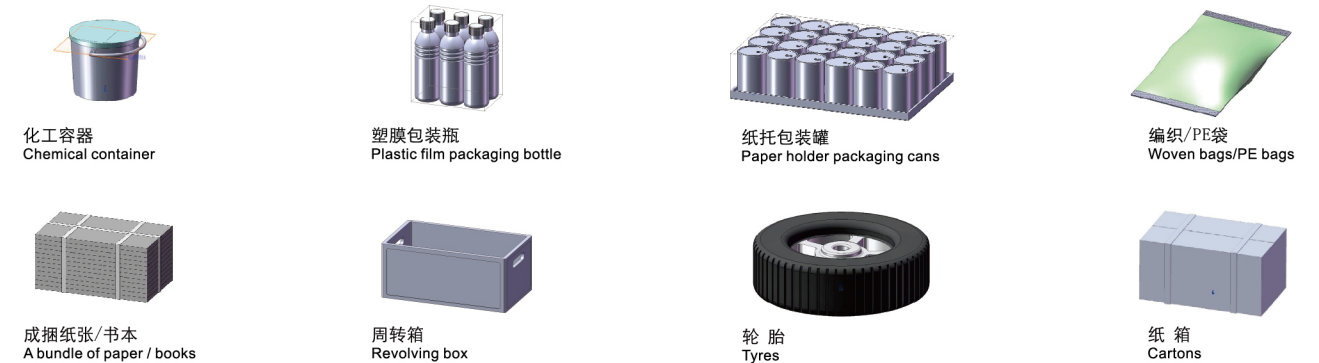

HFX系列用于输送有外包装的产品性能特点: Characteristics of HFX series used for transportation of packaged products

- * 输送量达到100件/分钟
Throughput up to 100 pieces/min
- * 负载达到50KG/米
Load up to 50 kg/m
- * 空间提升达到7米/单个驱动可叠加
Lifting height up to 7 m / single driver can be superimposed
- * 输送带速达60米/分钟
Conveyor belt speed up to 60 m/min
- * 输送带宽200mm到600mm范围
Conveyor belt width range 200mm to 600mm

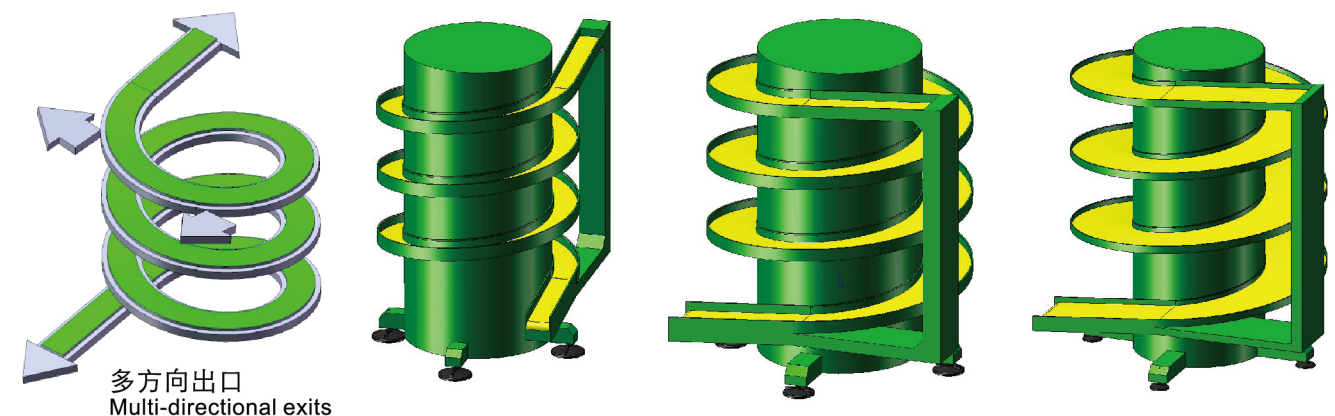

机器型号 Machine type :	HFX-200-1050	HFX-400-1350	HFX-600-1900
输送带宽 Conveyor belt width :	200mm	400mm	600mm
外径尺寸 Outer diameter :	1300mm	1850mm	2550mm

螺旋机系列
Spiral conveyor series

HFT系列用于输送单个瓶、罐物物体性能特点：
HFT series used for transportation of single bottles, cans


- * 用于大量单个瓶、罐上下空间输送及缓存分道输送
For a large number of individual bottles, cans up and down transportation; lanes transportation of buffer space
- * 具有3度到9度的倾斜角度
With 3°to 9° tilt angle
- * 输送带速达到35米/分钟
Conveyor belt speed up to 35m/min
- * 输送带宽200mm到500mm范围
Conveyor belt width range 200mm to 500mm



与夹持提升的比较
Comparison with the Clamping elevation conveyor

该方式不仅起上下输送的功能，也具备在输送过程中当作缓存系统，这样也提供额外的缓存空间，从而可减少其他缓存输送的成本投入，有效利用的空间。

This HFT series not only have the up and down transportation functions, but also with in the course of transportation as a caching system, which also provide an additional buffer space, thereby reducing the cost of inputs of other buffers and using the space effectively.

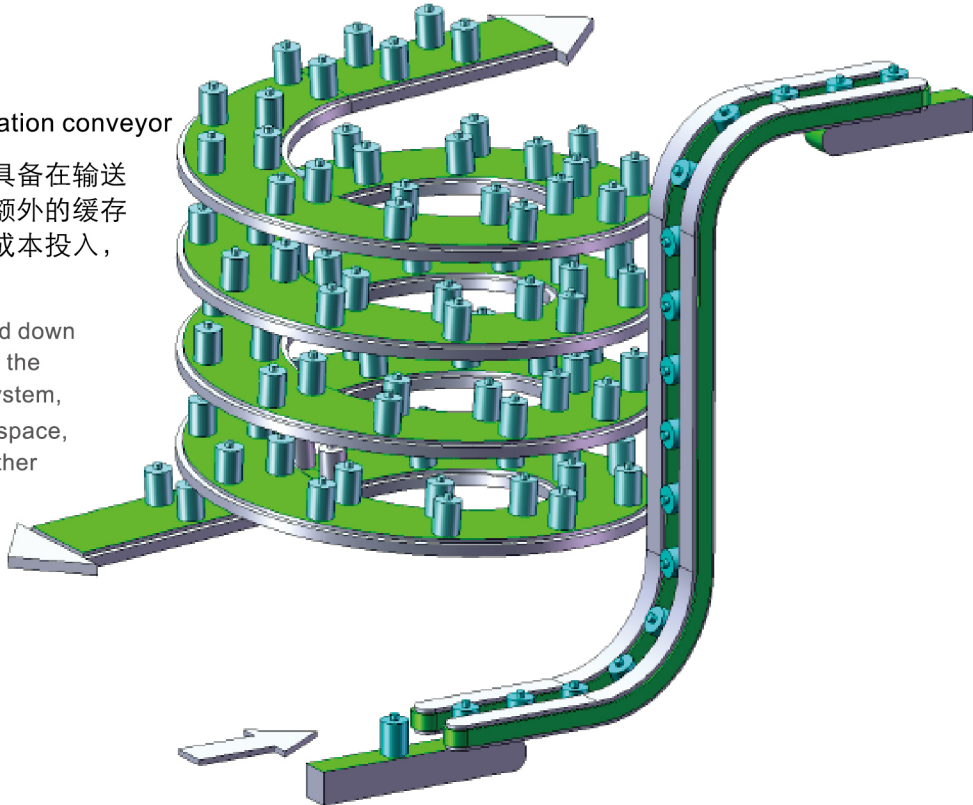

机器型号 Machine type :	HFT-200-1050	HFT-400-1350	HFT-600-1900
输送带列宽 Conveyor lane width :	200mm (2 Lanes)	400mm (4 Lanes)	600mm (6 Lanes)
外径尺寸 Outer diameter :	1300mm	1850mm	2550mm



Driven by Friction and Expertise

PRODUCTION / 生产

The lightweight belting helps increase your plant's throughput by supporting heavier product loadson the spiral. Globule Spiral's reliability will ensure minimal downtime and maximum productivity.

轻量化的模块网带可以承载更重的产品，整个塔的可靠性大幅度的减少了停机时间，从而提高了生产效率。

MAINTENANCE / 维护

The structure of the modular plastic mesh belt does not require cutting, grinding or welding.in therare instances where repairs are required, they take minutes instead of hours.

模块化塑料网带的结构完全不需要切割、打磨或焊接;哪怕在极少数需要维修的情况下，也只需几分钟而不是几小时。

SMALL FOOTPRINTS / 占地面积小

Globule Spiral Conveyors allowed to frozen,proof and handle a large amount of product within arelatively small footprints. If your production line layout space is limited, the Globule spiral conveyor system is a viable option.

Globule螺旋输送能够在相对小的面积内冷冻、醒发、存储大量的产品。如果您的生产线布局空间有限, Globule螺旋输送系统是一个很好的选择。

