


2-15 HXFE-Q25L-A 气控换向阀Y型

华春液压

产品外形 Product appearance

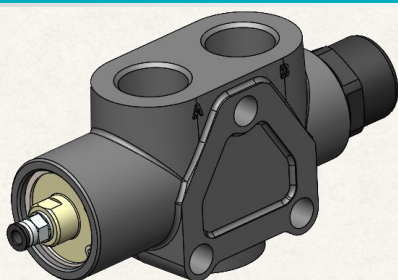

产品特性 Product features


◆ 适用于双油路切换控制，控制气缸未通气状态，油口P与油口A双向常通，控制气缸通气后，油口P与油口B双向常通，与油口A关闭。

It is suitable for dual oil circuit switching control. It controls the non-vented state of the cylinder, and the oil port P and the oil port A are normally connected in both directions. After the control cylinder is ventilated, the oil port P and the oil port B are normally connected in both directions, and the oil port A is closed.

可正反双侧装配，通径大体积小、内泄小。

◆ It can be assembled on both sides, with large diameter and small volume, and small internal leakage.

液压符号 Hydraulic symbol

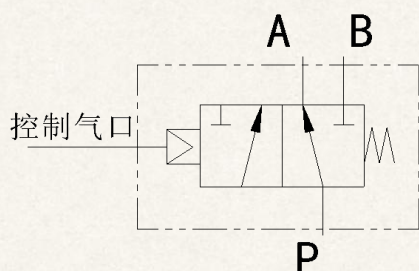

技术参数 Technical parameter

- 1.最高承压力(Maximum bearing pressure):35Mpa.
- 2.通径(Oil channel diameter): 25mm.
- 3.额定流量(Rated flow): 250L/min.
- 4.控制气压(Control air pressure): 0.6-1Mpa.
- 5.工作温度(Working temperature): -20 to+80℃.

外形尺寸 External dimensions

