




产品外形 Product appearance

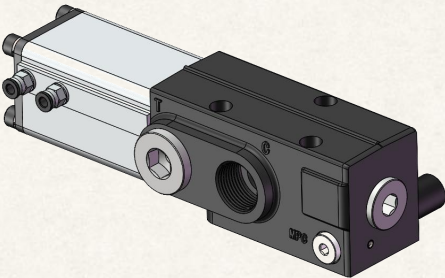

液压符号 Hydraulic symbol



外形尺寸 External dimensions

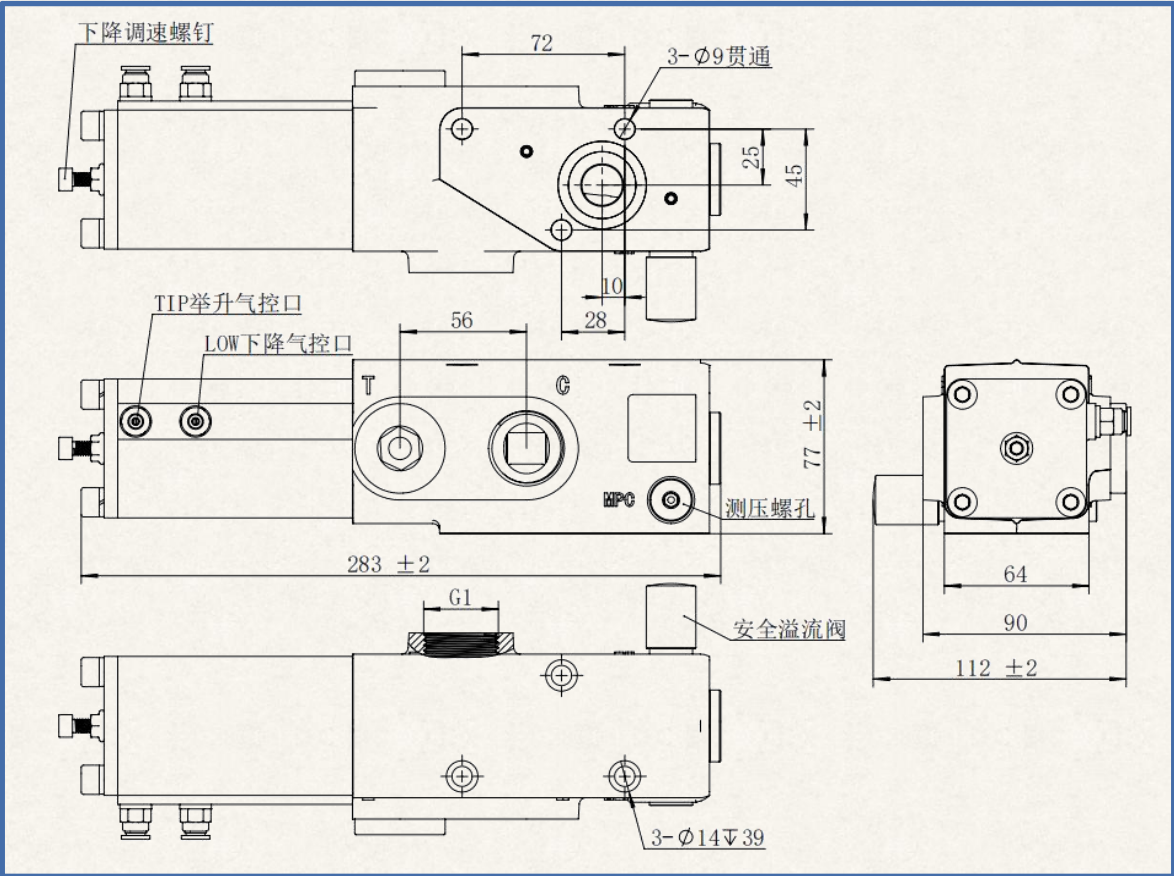

产品特性 Product features

- 适用于前顶多级缸的控制，可利用下置回油口T装配在油箱阀座直接回油。也可选择侧置回油口T1，采用管式回油。
It is suitable for the control of the front top multi-stage cylinder, and the lower oil return port T can be assembled on the valve seat of the oil tank to return the oil directly. The side oil return port T1 can also be selected, and the pipe type oil return is adopted.
- 远程气压控制车厢升、降和比例慢降功能。
Remote air pressure control truck up, down and proportional slow down function.
- 内设先导式溢流阀、进油单向阀，可设定系统压力。
It is equipped with a pilot-operated relief valve and an oil inlet check valve, which can set the system pressure.

技术参数 Technical parameter

- 额定压力(Rated pressure): 25Mpa.
- 通径(Oil channel diameter): 20mm.
- 额定流量(Rated flow): 220L/min.
- 控制气压(Control air pressure): 0.6-1Mpa.
- 工作温度(Working temperature): -20 to +80°C.