




Your Pets, Our Care

WUHAN SHERNBAO PET PRODUCTS MANUFACTURING CO., LTD.

WWW.SHERNBAO.COM



User Manual

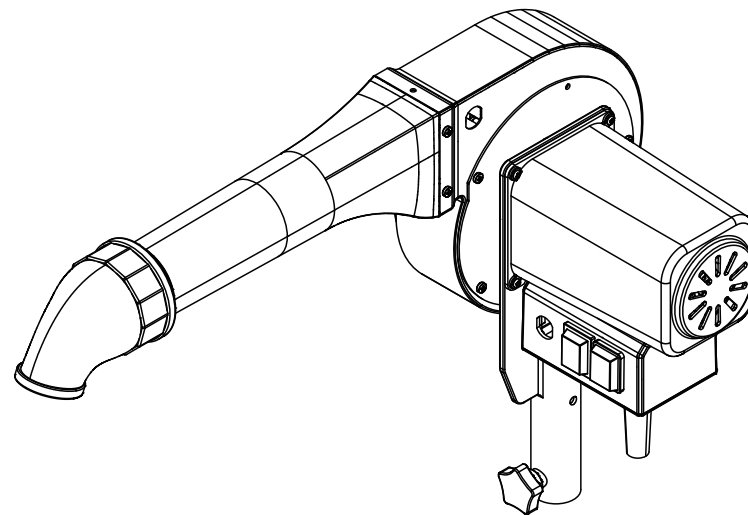

PSD-900

Stand Dryer

Thank you for choosing **shernbao** Professional Pet Dryer!

This premium professional dryer is engineered for grooming salons. Using mechanical switches to control temperature, build in negative-ion generator, effectively removing static. Even heat distribution protects pet coat. In addition to thoroughly drying, also achieve a fluffy, natural and full effect.

The floor-stand installation can quickly fix the air outlet in the desired position and adjust it freely; Convenient and fast, frees the groomer's hands and dramatically improving work efficiency.

For the better using experience, please be sure to install the device securely according to the instructions, and follow the below precautions before each startup:


1. Check if the current voltage and maximum circuit rating are consistent with the requirements of this product.
2. Make sure the air inlet filter is clean. If there is a lot of hair blocking it, please clean it immediately before turning it on for use.

Technical parameter

Wind speed	Max 22m/sec
Temperature	Max 70°C
Power	220V-240V/2000W 120V/1680W 100V/1380W
Noise	< 75dB

NOTICE

1. This appliance is not intended for use (including maintenance such as cleaning) by persons (including children aged from 8 years and below) with reduced physical, sensory or mental capabilities or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
2. Children should be supervised to ensure that they do not play with the appliance.
3. The appliance must have a separate power supply line with a reliable ground connection. Do not use electricity with other high-power equipment.
4. For additional protection, the installation of a Residual Current Device (RCD) having a rated residual operating current not exceeding 30 mA is advisable in the electrical circuit supplying the bathroom. Ask your installer for advice.
5. Do not insert any metal objects into the gaps of the appliance, nor allow any liquid to drip into it. Otherwise, it may cause electric shock personal injury or short-circuit of the appliance.
6. Do not cover, wrap, block the air outlet and air inlet to avoid damage to the appliance.
7. If there is a malfunction during the use of the appliance, please disconnect the power of the host in time and send it directly to Shernbao's designated after-sales service center for professional maintenance.
DO NOT disassemble the appliance by yourself. Otherwise, Shernbao company and our distributors are NOT responsible for any losses caused by this.
8. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
9. WARNING- Do not use this appliance near water in bathtubs, basins or other vessels containing water!
10. When the appliance is used in a bathroom, unplug it after use since the proximity of water presents a hazard even when the appliance is switched off.
11. Please install and use the corresponding stand bracket in strict accordance with this manual.

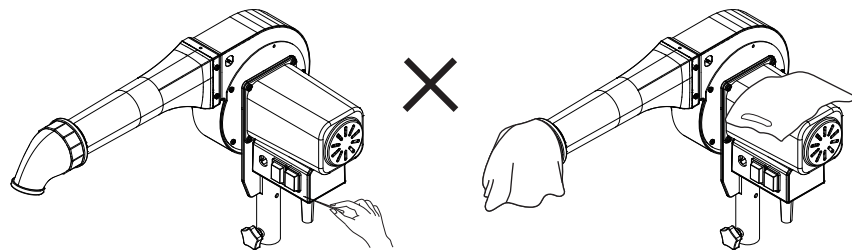


Daily Maintenance Precautions

Caution:

Before maintenance, be sure to disconnect the main unit power supply; otherwise, it may cause personal injury accidents!

1.Please clean the air intake filter of the main unit regularly. For pet store business use, it is recommended to clean it at least once a day to ensure normal air flow and low noise. Rotate the bolts on the top of the air intake grille counterclockwise to remove them, take out the air intake filter, and clean both the air intake grille and the filter. If washing is necessary, make sure they are completely dry before reinstalling and using!

2.If you need to clean the exterior, be sure to wipe it with a soft dry cloth. Do not use non-neutral detergents for cleaning; otherwise, it may cause damage to the unit's appearance.

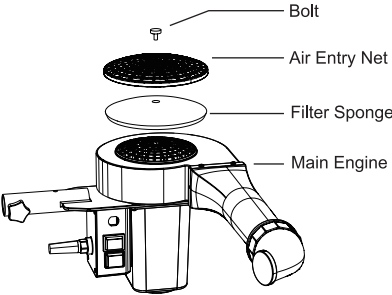


Operation introduction


Power switch: The red button on the front panel starts the motor.
Heat control: The black twin-row buttons select temperature.

Temperature

Press one button for Heat-1
Press both buttons for Heat-2



Aassembly diagram

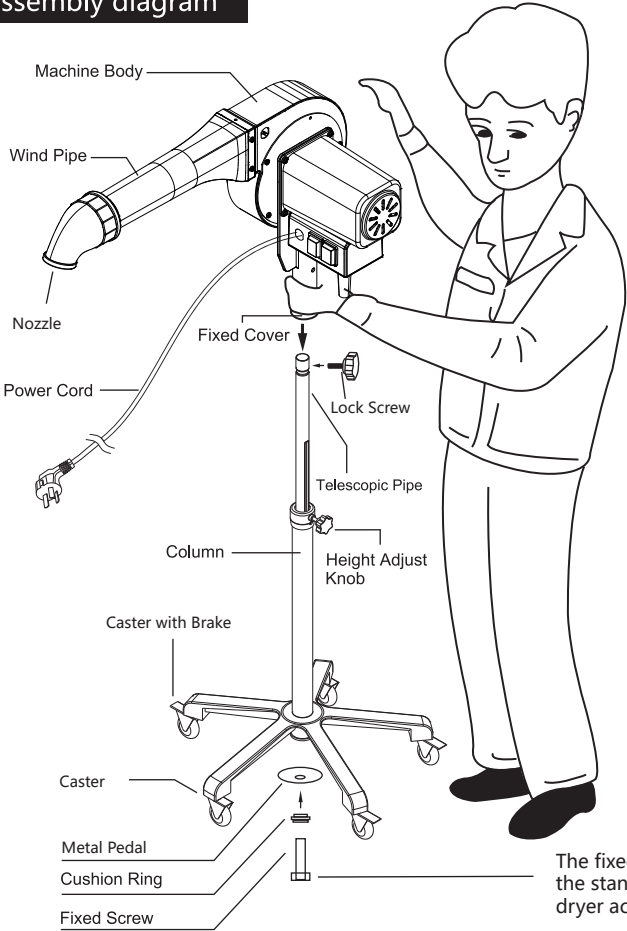

During installation, please ensure that the machine body into telescopic pipe and secure it with fixed screw. Do not loose the height adjust screw until the assembly is complete. If the telescopic pipe is released suddenly, its powerful impact may cause unexpected injuries!

Note: before use, always ensure that the machine body is attached to the stand firmly and the braking casters are fully locked.

The fixed screw is located at the bottom of the stand. Please remove it, then install the dryer according to the diagram.