
PLUS-4040-VLP
Energy Conservation Elements

Overview

Energy conservation elements are engineered to solve the high energy consumption and high cost challenges of pure water production. They maintain high water output and stable salt rejection at extremely low operating pressures, making them widely suitable for public drinking water as well as food, medical, and other industries.

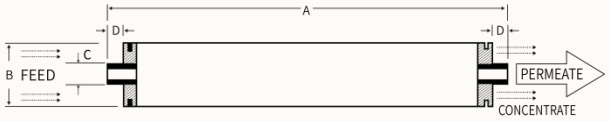

A = 40.0″ (1,016 mm) B = 3.9″ (99 mm)
C = 0.75″ (19 mm) D = 1.05″ (26.7 mm)

Specification

Average Permeate Flow	Stable Salt Reiection	Min. Salt Rejection	Effective Membrane Area	Feed Spacer
11.3 m^3/d (3,000 gpd)	**99%**	**98.5%**	**8.7 m^2 (94 ft^2)**	**28 mil**

Test: 500 ppm NaCl · 80 psi (0.55 MPa) · 25°C · pH 7–8 · 15% recovery.

Note: The salt rejection rate generally needs to be tested after 24-48 hours of continuous operation, depending on the feed water quality and operating conditions;
The flow rate of a single membrane element may exhibit fluctuations, but within a range of ±15%.

Max. Operating Conditions

Pressure, psi(MPa)	**600 (4.14)**	Max. pressure drop for single element, psi(MPa)	**15 (0.1)**
Feed water flow, m^3/h	**3.6**	Temperature, °C(°F)	**45(113)**
Feed free chlorine tolerance, mg/l	**<0.1**	Feed Silt Density Index (15 min) SDI_{15}	**5**
pH range during continuously operation	**2-11**	pH range during chemical cleaning	**1-13**

Note 1: When the pH exceeds 10, the maximum temperature for continuous operation is 35°C.
Note 2: Under certain conditions, influent water containing free chlorine and other oxidizing agents can cause serious membrane damage, as oxidative damage is not covered by the product warranty.

Applications


Community water


School drinking


Food & beverage water ent


Pharmaceutical water treatment

whatsAPP

Hangzhou Haina Environmental Protection Technology Co.,Ltd
Tel: +8613575498466
E-mail: natalie@hn-jcm.com
Web: https://www.hynamowater.com/
Office Address: 10th Floor, Building 1, Hangzhou Lifuhao Industrial Park,
No. 88 Pingchuang Road, Pingyao Town, Yuhang District, Hangzhou, Zhejiang Province, China
Factory Address: No. 188 Nanhua Mountain Road, Si'an Town, Changxing County, Huzhou, Zhejiang Province, China