

TECHNICAL DATA

Electrical data

Impedance 50Ω
Frequency range 0~3GHz
Working Voltage 250V max
Withstand Voltage 1000V rms
VSWR
Straight ≤ 1.2
Rigth Angle ≤ 1.3
Contact resistance
-center contact ≤5mΩ
-outer contact ≤1mΩ
Insulation resistance ≥500MΩ

Mechanical data

Temperature range -45°C~+120°C
Durability(matings) >500


Material data

Piece Part	Base Material	Plating
Body	Brass	Gold plated
Center conductor	Phosphor Bronze	Gold plated
Gasket	Silicone Rubber	
Insulator	PTFE	

Interface Standards

MIL-C-39012/CECC 22210/IEC 60169-16

REV	DESCRIPTION OR REVISION	ECN No.	BY	DATE	APPROVED
R001	N/A	N/A	JLWang	2013/05/19	Karl Pan

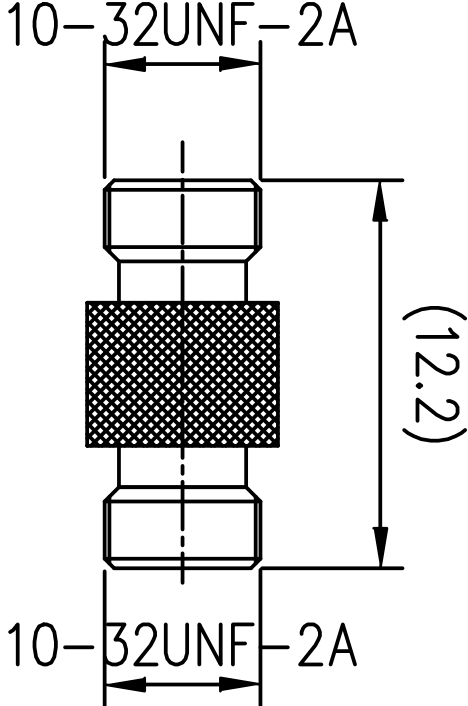

Part Name: 10-32 Femal to female adapter		WORLDPEAK® www.zjindf.com			
WT19D3.640.725	SIZE: A4	SCALES: 4:1	SHEET: 1/1	REV: A	
DIMENSIONS IN MILLIMETERS(mm)					

NOTES:
1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY