

TECHNICAL DATA

Electrical data

Impedance 50Ω
Frequency range 0~3GHz
Working Voltage 1700V max
Withstand Voltage 2000V rms
VSWR
Straight ≤ 1.2(DC~3G)
Insertion loss :0.25~0.3dbi (0-3G)
Intermodulation (IM3) 2 x 20 W: ≤-150 dBc
Insulation resistance ≥10000MΩ

Mechanical data

Temperature range -55℃~+155℃
Durability(matings) >500


Material data

Piece Part	Base Material	Plating
Body	Brass	Tri-Metal
Center conductor	Phosphor Bronze	Silver plated
Coupling nut	Brass	Nickel plated
Gasket	Silicone Rubber	
Insulator	PTFE	

Interface Standards

DIN 47231 , IEC 60169-11

REV	DESCRIPTION OF	ECN No.	BY	DATE	APPROVED
Rv01	N/A	N/A	J.Wang	2013/05/19	Karl Pan

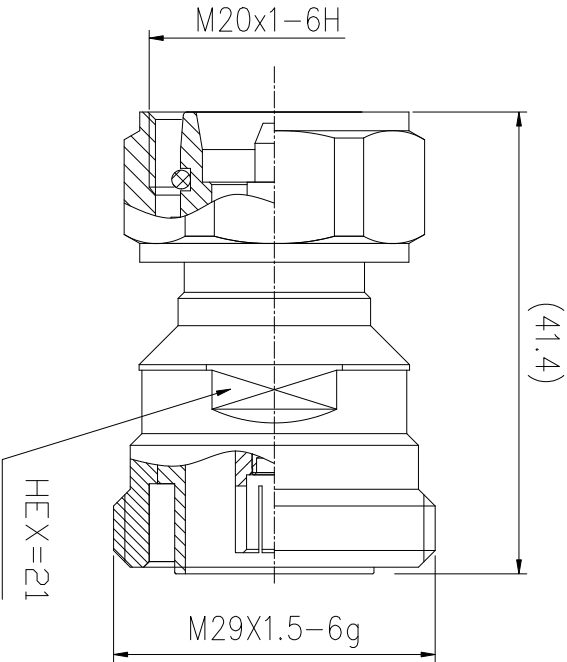

Part Name:

4.3/10 male to 7/16 Din female adaptor

WORLDPEAK®
www.zjworld.com

DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: A
----------	------------	------------	--------

NOTES:
1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY