

TECHNICAL DATA

REV	DESCRIPTION OF REVISION	ECN No.	BY	DATE	APPROVED
Rv01	N/A	N/A	J. Wang	2013/05/19	Karl Pam

Electrical data

Impedance 50Ω
 Frequency range 0~14GHz
 Working Voltage 1700V max
 Withstand Voltage 2000V rms
 VSWR
 Straight ≤1.2(DC~11G)
 Righth Angle ≤1.3
 Intermodulation (IM3) 2 x 20 W: ≤-159 dBc
 Insulation resistance ≥10000MΩ

Mechanical data


Temperature range -55°C~+155°C
 Durability(matings) >500

Material data

Piece Part	Base Material	Plating
Body	Brass	Tri-Metal
Center conductor	Phosphor Bronze	Silver plated
Coupling nut	Brass	Nickel plated
Gasket	Silicone Rubber	
Insulator	PTFE	

Interface Standards

DIN 47231 , IEC 60169-11

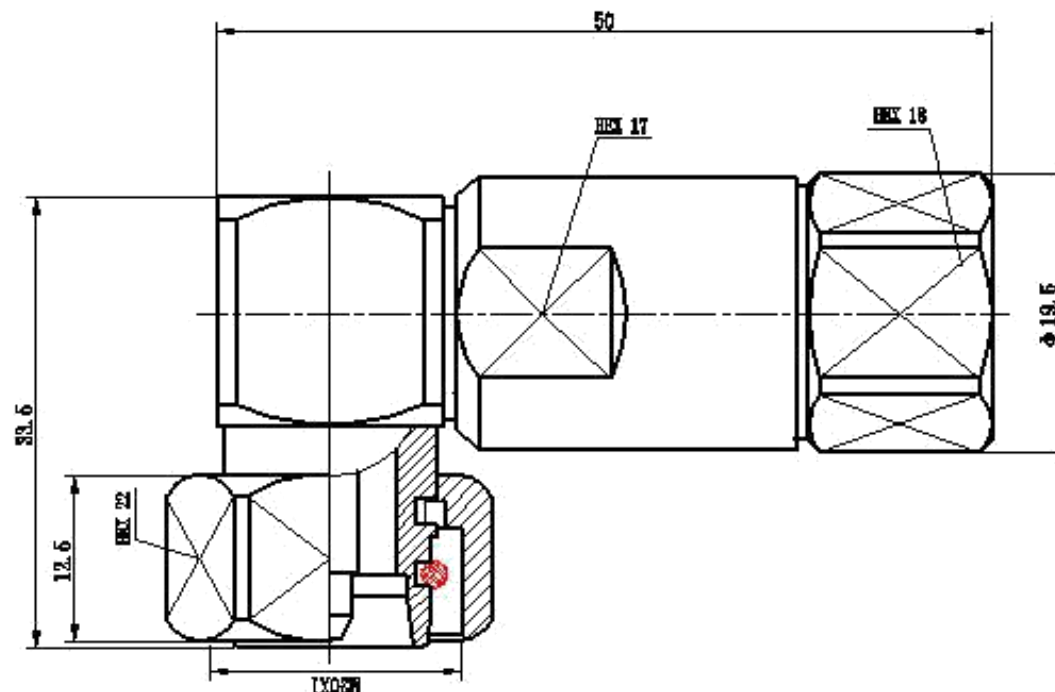

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Part Name:

4.3/10 male R/A Clamp
for 1/2 cable

WT21D3. 640. 1188

WORLDPEAK®
www.zjwodf.com

DIMENSIONS IN MILLIMETERS (mm)

SIZE:
A4

SCALE:
4:1

SHEET:
1/1

REV:
A