

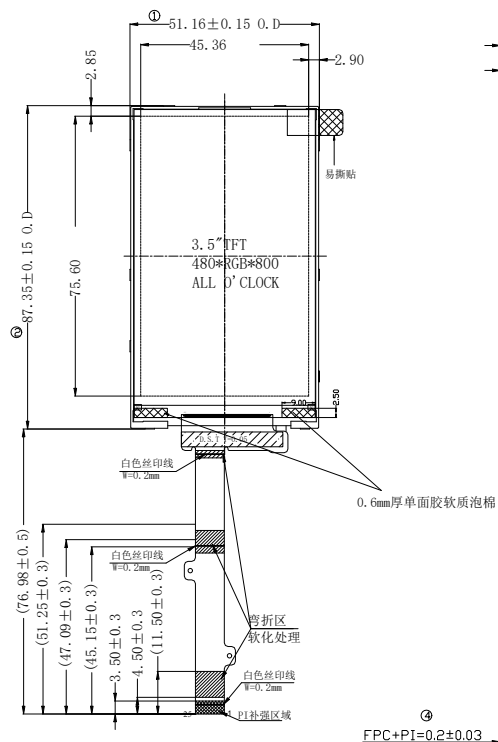




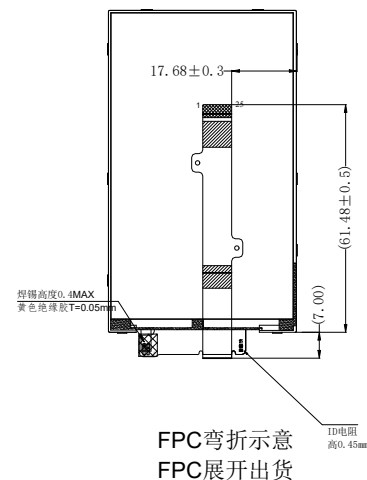


③
-2.1 ± 0.15 LCM
(0.28)

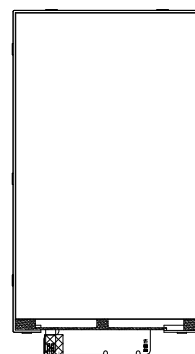

⑤
7.80 ± 0.1
0.05MM双面带导电布接地
导电布撕手离型纸保留出货
对应连接器型号:
YXT-ZF20-25F-00

- NOTES:
1. GENERAL TOLERANCE: ± 0.2
 2. () REFERENCE DIMENSION
 3. Important dimension: ①~⑤

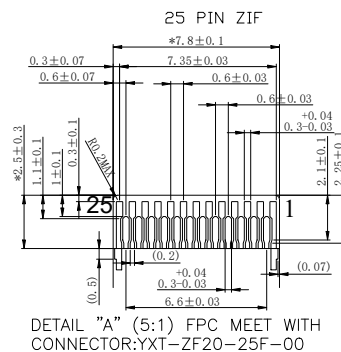

PIN	Description
1	LED+
2	LED-
3	GND
4	NC
5	NC
6	GND
7	TDPO
8	TDNO
9	GND
10	TCP
11	TCN
12	GND
13	TDP1
14	TDN1
15	GND
16	NC
17	NC
18	GND
19	LCD_RST
20	LCD_TE
21	ID (10K GND)
22	VDD2.8V
23	GND
24	VI01.8V
25	GND

LCD Type	3.5" TFT, Transmissive
Resolution	480(RGB)*800
View Direction	All O'CLOCK
LCD Driver IC	ST7701S
Color Depth	16.7M
Interface Types	MIPI
Operating voltage	2.8V
TP/Lens	Without
Backlight LEDs	7 LEDs, 20mA, 22.4V
Surface luminance	420 cd/m2
Operating temperature	-10 °C ~ 60 °C
Storage temperature	-20 °C ~ 70 °C

版本 (Version)	变更记录 (Change History)	日期 (Date)
A0	Initial release	2020.03.25

设计 (DESIGN)	Bill
审核 (CHECKED)	Aron
批准 (APPROVED)	Aron
客户承认 (CUSTOMER APPROVAL)	

TSD™ 一眾显示 TEAM SOURCE DISPLAY		
TITLE: MODULE SPEC	页面 (Page) 单位 (Unit)	1 / 1 mm
Drawing No. TST035WVBS-66	比例 (SCALE) 角度 (Angle)	1 : 1