

CG SERIES



**Embrace the Legend:
Make the Switch to Un-
paralleled Power, Un-
wavering Reliability, and
Redefine Your Potential.**



FM 547660



INTERNATIONAL STANDARD

Standard: IEC60669-1,
BS1363-2, BS546, BS4177
Quality Management System - ISO 9001:2008
Certificate No: FM547660
Certificate No: 2020GTC8536206126
Certificate No: 2020GTC8536206226
Certificate No: 2020GTC8536207502



All copper, silver contacts

2511/2512



2521/2522



2531/2532



2541/2542



10 Amp, 10AX Plate Switches

Part No	Description	Pack	CBM
2511	1 gang 1 way switch	10*10	0.031
2512	1 gang 2 way switch	10*10	0.031
2521	2 gang 1 way switch	10*10	0.031
2522	2 gang 2 way switch	10*10	0.031
2531	3 gang 1 way switch	10*10	0.031
2532	3 gang 2 way switch	10*10	0.031
2541	4 gang 1 way switch	10*10	0.031
2542	4 gang 2 way switch	10*10	0.031

- All switches 10 Amp, 10AX inductive rated
- Captive terminal screws
- Terminal capacity 4 × 1.0mm², 4 × 1.5mm², 2 × 2.5mm² & 1 × 4mm²

- Minimum mounting box depth: 1, 2, 3 & 4 gang 25 mm

8915SL



- 15A Manufactured to BS 546
- Minimum mounting box depth: 35mm

15 Amp Switched Socket

Part No	Description	Pack	CBM
8915SL	15A switched socket with neon	10*10	0.031

2511BL



- Manufactured to BS 5733 where applicable
- Minimum mounting box depth: 25mm

Bell Push Switch

Part No	Description	Pack	CBM
2511BL	Bell Push Switch with neon	10*10	0.031

2520L



2545L



2548L



20 Amp, 20AX & 45 Amp, 10AX Plate Switches

Part No	Description	Pack	CBM
2520L	20AD.P.switch with neon	10*10	0.031
2545L	3×6 45AD.P.switch with neon	10*10	0.031
2548L	3×6 45AD.P.switch with neon	5*10	0.031

- L&N terminal capacity 4 × 4.0mm², 3 × 6mm² & 1 × 16mm²
- Minimum mounting box depth: 2520L 25mm, 2545L & 2548L 35mm
- E terminal 4 × 4.00mm², 3 × 6.0mm² & 1 × 6mm²

8505



8505D



8504



Multi 13 Amp Socket

Part No	Description	Pack	CBM
8505	Multi 13A switched socket with neon	10*10	0.031
8505D	Double multi 13A switched socket with neon	10*10	0.031
8504	Double multi 13A switched socket with 2 USB	10*10	0.031

- Manufactured to BS 5733 where applicable
- Minimum mounting box depth: 47mm

8506



- Minimum mounting box depth: 25mm

Satellite Outlet

Part No	Description	Pack	CBM
8506	Satellite Outlet	10*10	0.031

8913SD



Part No	Description	Pack	CBM
8913SD	Double 13A switched socket	5*10	0.031
8959SD	Double 13A switched socket with 2USB	5*10	0.031
8913SD	Double 13A switched socket with neon	5*10	0.031

- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity
 - protective connection Ref.BS 7671:2008
 - Terminal capacity 3 ×2.5mm², 3 ×4.0mm², & 2×6.0mm²
 - Minimum mounting box depth:25mm
- Manufactured to BS 1363-2

2501

- Manufactured to BS EN 60670
- Concealed fixing screws

Part No	Description	Pack	CBM
2501	3X3 Blank plate	10*10	0.031
2502	3X6 Blank plate	5*10	0.031

FL SERIES



It can be used with different 2-pin plugs such as European plugs, British plugs, American plugs and Australian plugs. Voltage varies from 115V to 220V.



FM 547660



INTERNATIONAL STANDARD

Standard: IEC60669-1,
BS1363-2, BS546, BS4177
Quality Management System - ISO 9001:2008
Certificate No: FM547660
Certificate No: 2020GTC8536206126
Certificate No: 2020GTC8536206226
Certificate No: 2020GTC8536207502



All copper, silver contacts

3111/3112



3121/3122



3131/3132



3141/3142



10 Amp, 10AX Plate Switches

Part No	Description	Pack	CBM
3111	1 gang 1 way switch	10*10	0.031
3112	1 gang 2 way switch	10*10	0.031
3121	2 gang 1 way switch	10*10	0.031
3122	2 gang 2 way switch	10*10	0.031
3131	3 gang 1 way switch	10*10	0.031
3132	3 gang 2 way switch	10*10	0.031
3141	4 gang 1 way switch	10*10	0.031
3142	4 gang 2 way switch	10*10	0.031

- All switches 10 Amp, 10AX inductive rated
- Captive terminal screws
- Terminal capacity 4 × 1.0mm², 4 × 1.5mm², 2 × 2.5mm² & 1 × 4mm²

- Minimum mounting box depth: 1, 2, 3 & 4 gang 25 mm

3215SL



- 15A Manufactured to BS 546
- Minimum mounting box depth: 35mm

15 Amp Switched Socket

Part No	Description	Pack	CBM
3215SL	15A switched socket with neon	10*10	0.031

3111B



- Manufactured to BS 5733 where applicable
- Minimum mounting box depth: 25mm

Bell Push Switch

Part No	Description	Pack	CBM
3111B	Bell Push Switch	10*10	0.031

3120L



3148L



20 Amp, 20AX & 45 Amp, 10AX Plate Switches

Part No	Description	Pack	CBM
3120L	20AD.P.switch with neon	10*10	0.031
3148L	3×6 45AD.P.switch with neon	5*10	0.031

- L&N terminal capacity 4 × 4.0mm², 3 × 6mm² & 1 × 16mm²
- Minimum mounting box depth: 3120L 25mm, 3148L 35mm
- E terminal 4 × 4.00mm², 3 × 6.0mm² & 1 × 6mm²

3255SL



3255SDL



3255SD



Multi 13 Amp Socket

Part No	Description	Pack	CBM
3255SL	Multi 13A switched socket with neon	10*10	0.031
3255SDL	Double multi 13A switched socket with neon	5*10	0.031
3255SD	Double multi 13A switched socket with 2 USB	5*10	0.031

- All switches 13 Amp 13AX inductive rated
- Captive terminal screws
- Terminal capacity 4 × 1.0mm², 4 × 1.5mm², 2 × 2.5mm² & 1 × 4mm²
- Minimum mounting box depth: 3255SL & 3255SDL 35mm
- 3255SD 47mm

3204



- Manufactured to BS 5733 where applicable
- Minimum mounting box depth: 47mm

TV Outlet

Part No	Description	Pack	CBM
3204	TV Outlet	10*10	0.031

8113S



8113SDL



8113SD



13 Amp Socket

Part No	Description	Pack	CBM
8113S	13A switched socket with neon	10*10	0.031
8113SDL	Double 13A switched socket with neon	5*10	0.031
8113SD	Double 13A switched socket	5*10	0.031

- Twin earth fitted as standard to allow a double earth facility for installtions requiring high ntegrity
 - protective connection Ref.BS 7671:2008
 - Manufactured to BS 1363-2
- Terminal capacity 3 ×2.5mm²,3 ×4.0mm², & 2×6.0mm²
 - Minimum mouting box depth:25mm

3101



3102



- Manufactured to BS EN 60670
- Concealed fixing screws


Blank Plates

Part No	Description	Pack	CBM
3101	3X3 Blank plate	10*10	0.031
3102	3X6 Blank plate	5*10	0.031

K SERIES




Big pressing button,
great circle design
and with large rounded-
corners, classic design looks
simple but beautiful.

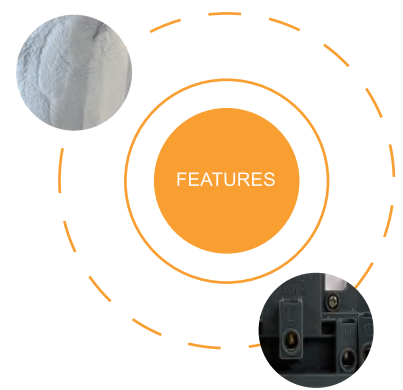

High quality bakelite powder
Flame retardant material, peace of mind protection



Environment friendly silver alloy
AgNi alloy inside contact material,
antioxidant, durable,
environmental-friendly
and electrical conductivity

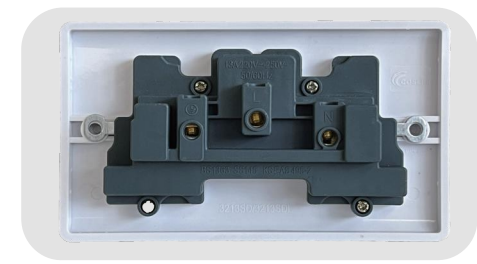

Base
PC and Nylon material
Fire & High-temp resistant
With good cable connection

3111/3112



3121/3122



3131/3132



3141/3142



10 Amp, 10AX Plate Switches

Part No	Description	Pack	CBM
3111	1 gang 1 way switch	10*10	0.031
3112	1 gang 2 way switch	10*10	0.031
3121	2 gang 1 way switch	10*10	0.031
3122	2 gang 2 way switch	10*10	0.031
3131	3 gang 1 way switch	10*10	0.031
3132	3 gang 2 way switch	10*10	0.031
3141	4 gang 1 way switch	10*10	0.031
3142	4 gang 2 way switch	10*10	0.031

- All switches 10 Amp, 10AX inductive rated
- Captive terminal screws
- Terminal capacity 4 × 1.0mm², 4 × 1.5mm², 2 × 2.5mm² & 1 × 4mm²

- Minimum mounting box depth: 1, 2, 3 & 4 gang 25 mm

3215SL



- 15A Manufactured to BS 546
- Minimum mounting box depth: 32mm

15 Amp Switched socket

Part No	Description	Pack	CBM
3215SL	15A switched socket with neon	10*10	0.031

3104



- Manufactured to BS 5733 where applicable
- Minimum mounting box depth: 25mm

TV Outlet

Part No	Description	Pack	CBM
3104	TV Outlet	10*10	0.031

3145L



3145L



3120L



20 Amp, 20AX & 45 Amp, 10AX Plate Switches

Part No	Description	Pack	CBM
3120L	20AD.P.switch with neon	10*10	0.031
3145L	3×3 45AD.P.switch with neon	10*10	0.031

- L&N terminal capacity 4 × 4.0mm², 3 × 6mm² & 1 × 16mm²
- Minimum mounting box depth: 3120L 25mm 3145L 32mm
- E terminal 4 × 4.00mm², 3 × 6.0mm² & 1 × 6mm²

3148L



3148L



3x6 Cooker Unit With Neon

Part No	Description	Pack	CBM
3148L	3x6 Cooker Unit With Neon	5*10	0.031

- L&N terminal capacity 4 × 4.0mm², 3 × 6mm² & 1 × 16mm²
- Minimum mounting box depth: 32 mm
- E terminal 4 × 4.00mm², 3 × 6.0mm² & 1 × 6mm²

3255SL



3255SD



3260SD



Multi 13 Amp Socket

Part No	Description	Pack	CBM
3255SL	Multi 13A switched socket with neon	10*10	0.031
3225SD	Double multi 13A switched socket with neon	5*10	0.031
3260SD	Double multi 13A switched socket with 2 USB	5*10	0.031

- All switches 13 Amp 13AX inductive rated
- Captive terminal screws
- Terminal capacity 4 × 1.0mm², 4 × 1.5mm², 2 × 2.5mm² & 1 × 4mm²
- Minimum mounting box depth: 3255SL & 3255SD 32mm 3260SD 35mm

DIAMOND SERIES

DIAMOND SERIES



Wide selection of painted colors, providing design solutions for any decor. Ingenuity grade design with elegant styling offers you fashionable feel .


DIAMOND SERIES

MULTICOLOR OPTIONAL




Any colors Available

Convenient wiring



Unflammable PC material

Fire retardant test





FM 547660



INTERNATIONAL STANDARD

Standard: IEC60669-1,
BS1363-2, BS546, BS4177
Quality Management System - ISO 9001:2008
Certificate No: FM547660
Certificate No: 2020GTC8536206126
Certificate No: 2020GTC8536206226
Certificate No: 2020GTC8536207502



All copper, silver contacts

2211/2212

2221/2222

2231/2232

2241/2242



10 Amp 10AX Plate Switches

Part No	Description	Pack	CBM
2211	1 gang 1 way switch	10*10	0.041
2212	1 gang 2 way switch	10*10	0.041
2221	2 gang 1 way switch	10*10	0.041
2222	2 gang 2 way switch	10*10	0.041
2231	3 gang 1 way switch	10*10	0.041
2232	3 gang 2 way switch	10*10	0.041
2241	4 gang 1 way switch	10*10	0.041
2242	4 gang 2 way switch	10*10	0.041

- All switches 10 Amp, 10AX inductive rated
Captive terminal screws
- Terminal capacity 4 × 1.0mm² 4 × 1.5mm²
2 × 2.5mm² & 1 × 4mm²

- Minimum mounting box depth:
1, 2, 3 & 4 gang 32mm

2272

2282



- Minimum mounting box depth:
2272 & 2282 35mm

Fan Controller-5 Speed & Light Controller

Part No	Description	Pack	CBM
2272	Fan speed switch	10*10	0.055
2282	Light Dimmer Switch	10*10	0.055

2211B



- Minimum mounting box depth: 32mm

Bell Push Switch

Part No	Description	Pack	CBM
2211B	Bell Push switch	10*10	0.055



20 Amp, 20AX & 45Amp, 10AX Plate Switches

Part No	Description	Pack	CBM
2220L	20AD.P.switch with neon	10*10	0.041
2245L	3x3 45AD.P.switch with neon	10*10	0.041
2248L	3x6 45AD.P.cooker unit with neon	5*10	0.033

- L&N terminal capacity 4x4.0mm², 3x6mm² & 1x16mm²
- E terminal 4x4.00mm², 3x6.0mm² & 1x6mm²

- Minimum mounting box depth:
2220L 25mm, 2245L & 2248L 32mm



Multi 13 Amp Socket

Part No	Description	Pack	CBM
8255SL	Multi 13A switched socket with neon	10*10	0.041
8225SL-B	Multi 13A switched socket with neon(big button)	10*10	0.041
8256SL	Multi switched socket with neon & 2 pin socket	10*10	0.041
8260SL	Multi 13A switched socket with neon & 2USB	10*10	0.041
8255SDL-B	Double multi 13A switched socket with neon(big button)	5*10	0.033
8261SDL	Double multi 13A switched socket with neon & USB+type-c	5*10	0.033

- All switches 13 Amp, 13AX inductive rated
- Captive terminal screws
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4mm²

- Minimum mounting box depth:
8255SL-B, 8255SL, 8256SL & 8256SL 32mm
- 8260SL & 8255SDL-B 35mm



13 Amp Socket

Part No	Description	Pack	CBM
8213SL	13A switched socket with neon	10*10	0.041
8213SL-B	13A switched socket with neon(big button)	10*10	0.041
8213SDL	Double 13A switched socket with neon	5*10	0.033
8213SDL-B	Double 13A switched socket with neon(big button)	5*10	0.033

- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity
- protective connection Ref. BS 7671:2008
- Manufactured to BS 1363-2

- Terminal capacity 3 x 2.5mm², 3 x 4.0mm², & 2 x 6.0mm²
- Minimum mounting box depth: 32mm



- 15A Manufactured to BS 546
- Minimum mounting box depth: 3

15 Amp Switched Socket

Part No	Description	Pack	CBM
8215SL	15A switched socket with neon	10*10	0.041
8215SL-B	15A switched socket with neon(big button)	10*10	0.041



- All switches 16 Amp, 16AX inductive rated
- Minimum mounting box depth: 47mm

16 Amp Socket

Part No	Description	Pack	CBM
8216S	16A socket	10*10	0.055



TV & Internet Outlet

Part No	Description	Pack	CBM
8204	TV Outlet	10*10	0.041
8204D	Double TV Outlet	10*10	0.041
8209	TV & DATE Outlet	10*10	0.041

- Manufactured to BS 5733 where applicable
- Minimum mounting box depth: 8204 & 8204D 32mm,8209 47mm



- Manufactured to BS 6312 where applicable
- Minimum mounting box depth: 8203 32mm,8205 47mm

Tell & Satellite Outlet

Part No	Description	Pack	CBM
8203	Telephone Outlet	10*10	0.041
8205	DATA Outlet or computer Outlet	10*10	0.041
8206	Satellite Socket	10*10	0.041



- Manufactured to BS EN 60670
- Concealed fixing screws

Blank Plates

Part No	Description	Pack	CBM
2201	3X3 Blank plate	10*10	0.041
2202	3X6 Blank plate	10*10	0.041



Onyx series






**MULTICOLOR
OPTIONAL**

Any colors Available



Convenient wiring

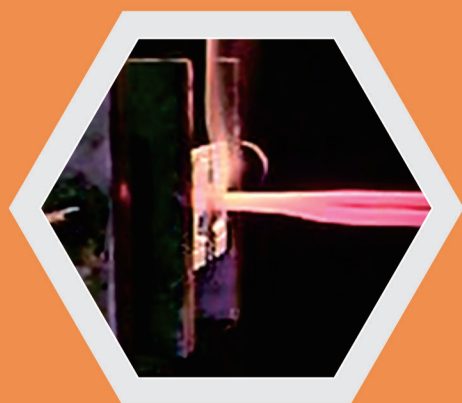

Fire retardant test

INTERNATIONAL STANDARD

Standard: IEC60669-1,
BS1363-2, BS546, BS4177
Quality Management System - ISO 9001:2008
Certificate No: FM547660
Certificate No: 2020GTC8536206126
Certificate No: 2020GTC8536206226
Certificate No: 2020GTC8536207502



FM 547660




New PC material(no recyle)



All copper, silver contacts

Onyx Series

The Onyx Series switches feature a sleek, dark finish that adds a touch of sophistication to any space.

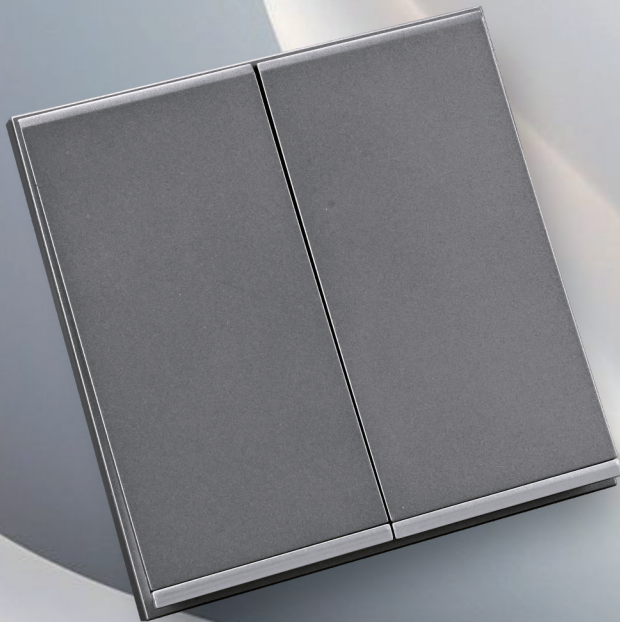

Onyx Series

1 gang switch

Part No.	Description	Pack	Cbm
2011	1 gang 1 way switch	10 * 10	0.041
2012	1 gang 2 way switch		
2013	Intermediate switch		



2 gang switch

Part No.	Description	Pack	Cbm
2021	2 gang 1 way switch	10 * 10	0.041
2022	2 gang 2 way switch		



3 gang switch

Part No.	Description	Pack	Cbm
2031	3 gang 1 way switch	10 * 10	0.041
2032	3 gang 2 way switch		



4 gang switch

Part No.	Description	Pack	Cbm
2041	4 gang 1 way switch	10 * 10	0.041
2042	4 gang 2 way switch		



Curtain switch

Part No.	Description	Pack	Cbm
2022C	Curtain switch	10 * 10	0.041



Bell push switch

Part No.	Description	Pack	Cbm
2011B	Bell push switch	10 * 10	0.041



3X3 Blank plate

Part No.	Description	Pack	Cbm
2001	3x3 Blank plate	20 * 10	0.041



3X6 Blank plate

Part No.	Description	Pack	Cbm
2002	3x6 Blank plate	10 * 10	0.033



13A socket

Part No.	Description	Pack	Cbm
8013-S	13A socket	10 * 10	0.041



Onyx Series



Double 13A socket			
Part No.	Description	Pack	Cbm
8013D-S	Double 13A socket	5 * 10	0.033



13AD.P. switched socket with neon			
Part No.	Description	Pack	Cbm
8013SL-D	13AD.P switched socket with neon	10 * 10	0.041



13AD.P. switched socket with neon & USB+type-c			
Part No.	Description	Pack	Cbm
8063S-D	13AD.P. switched socket with neon & USB+type-c	10 * 10	0.041



Double 13AD.P. switched socket with neon & USB+type-c			
Part No.	Description	Pack	Cbm
8063SDL-D	Double 13AD.P. switched socket with neon& USB+type-c	5 * 10	0.033



Double 13AD.P. switched socket with neon			
Part No.	Description	Pack	Cbm
8013SDL-D	Double 13AD.P. switched socket with neon	5 * 10	0.033



3x3 45AD.P. switch with neon			
Part No.	Description	Pack	Cbm
2045L	3x3 45AD.P. switch with neon	10 * 10	0.041



20AD.P. switch with neon			
Part No.	Description	Pack	Cbm
2020L	20AD.P. switch with neon	10 * 10	0.041



3X6 45AD.P. switch with neon			
Part No.	Description	Pack	Cbm
2045L-1	3X6 45AD.P. switch with neon	10 * 10	0.041



3X6 45AD.P. cooker unit with neon			
Part No.	Description	Pack	Cbm
2048L-1	3X6 45AD.P. cooker unit with neon	10 * 10	0.041

Standard According to IEC60669-1 / BS1363-2

Onyx Series

45A Flex Outlet Plate			
Part No.	Description	Pack	Cbm
8045S	45A Flex Outlet Plate	10 * 10	0.041



20A Flex Outlet Plate			
Part No.	Description	Pack	Cbm
8020S	20A Flex Outlet Plate	10 * 10	0.041



Insert Key for power with neon			
Part No.	Description	Pack	Cbm
2003L	Insert key for power with neon	10 * 10	0.055



Light Dimmer Switch			
Part No.	Description	Pack	Cbm
2072	Light dimmer switch	10 * 10	0.055



Fan speed switch			
Part No.	Description	Pack	Cbm
2072	Fan speed switch	10 * 10	0.055



TV Outlet			
Part No.	Description	Pack	Cbm
8004	TV outlet	10 * 10	0.041



TV&DATA Outlet			
Part No.	Description	Pack	Cbm
8009	TV & DATA Outlet	10* 10	0.041



DATA /computer Outlet			
Part No.	Description	Pack	Cbm
8003 8005	DATA Outlet computer Outlet	10 * 10	0.041



Satellite socket			
Part No.	Description	Pack	Cbm
8006	Satellite socket	10 * 10	0.041



Standard According to IEC60669-1 / BS1363-2

JEWEL SERIES


The Jewel range embody modern and classical style, capturing the charm and grace of classical design with contemporary twist.



The Jewel series has two different appearance to choose from, the J 1 is rounded and smooth, while the J 2 has slightly convex and concave edges




Product features ◀◀◀

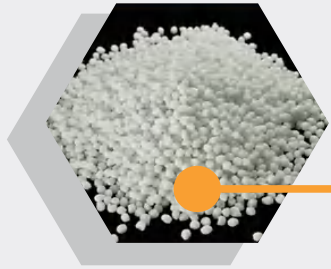

Uninflammable
PC material

Convenient wiring



Fire retardant test



FM 547660



INTERNATIONAL STANDARD

Standard: IEC60669-1,
BS1363-2, BS546, BS4177
Quality Management System - ISO 9001:2008
Certificate No: FM54766
Certificate No: 2020GTC8536206126
Certificate No: 2020GTC8536206226
Certificate No: 2020GTC8536207502



All copper, silver contacts

J611/J612



J621/J622



J631/J632



J641/J642



10 Amp, 10AX Plate Switches

Part No	Description	Pack	CBM
J611	1 gang 1 way switch	10*10	0.0318
J612	1 gang 2 way switch	10*10	0.0318
J621	2 gang 1 way switch	10*10	0.0318
J622	2 gang 2 way switch	10*10	0.0318
J631	3 gang 1 way switch	10*10	0.0318
J632	3 gang 2 way switch	10*10	0.0318
J641	4 gang 1 way switch	10*10	0.0318
J642	4 gang 2 way switch	10*10	0.0318

- All switches 10 Amp, 10AX inductive rated
- Captive terminal screws
- Terminal capacity 4 × 1.0mm², 4 × 1.5mm², 2 × 2.5mm² & 1 × 4mm²

- Minimum mounting box depth: 1, 2, 3 & 4 gang 25mm

J672



J682



- Minimum mounting box depth: J672 & J682 32mm

Fan Controller-5 Speed & Light Controller

Part No	Description	Pack	CBM
J672	Fan speed switch	10*10	0.0318
J682	Light Dimmer Switch	10*10	0.0318

J611WL



J611BL



- Minimum mounting box depth: 32mm

Bell Push Switch

Part No	Description	Pack	CBM
J611WL	Water-proof Bell Push switch	10*10	0.0318
J611BL	Bell Push Switch	10*10	0.0318

J620L



J645L



J648L



20 Amp, 20AX & 45 Amp, 10AX Plate Switches

Part No	Description	Pack	CBM
J620L	20AD.P.switch with neon	10*10	0.0318
J645L	3×3 45AD.P.switch with neon	10*10	0.0318
J648L	3×6 45AD.P.cooker unit with neon	5*10	0.0318

- L&N terminal capacity 4×4.0mm², 3×6mm² & 1×16mm²
- E terminal 4×4.00mm², 3×6.0mm² & 1×6mm²

- Minimum mounting box depth: J620L 25mm, J645&J648L 32mm

J660SL



J656SL



J661SL



J661SDL



J655SL



J655SDL



Multi 13 Amp Socket

Part No	Description	Pack	CBM
J660SL	Multi 13A switched socket with neon& 2USB	10*10	0.0318
J665SL	Multi 13A switched socket with neon	10*10	0.0318
J656SL	Multi switched socket with neon& 2 pin socket	10*10	0.0318
J661SL	Multi 13A switched socket with neon& USB+type-c	10*10	0.0318
J655SDL	Double multi 13A switched socket with neon	5*10	0.0318
J661SDL	Double multi 13A switched socket with neon& USB+type-c	5*10	0.0318

- All switches 13 Amp, 13AX inductive rated
- Captive terminal screws
- Terminal capacity 4 × 1.0mm², 4 × 1.5mm², 2 × 2.5mm² & 1 × 4mm²

- Minimum mounting box depth: J660SL, J655SL&J656SL 32mm
- J661SL, J655SDL&J661SDL 35mm



13 Amp Socket

Part No	Description	Pack	CBM
J613S	13A switched socket	10*10	0.041
J613SL	13A switched socket with neon	10*10	0.041
J613SD	Double 13A switched socket	5*10	0.041
J613SDL	Double 13A switched socket with neon	5*10	0.041

- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity
- protective connection Ref.BS 7671:2008
- Manufactured to BS 1363-2
- Terminal capacity 3 × 2.5mm², 3 × 4.0mm², & 2 × 6.0mm²
- Minimum mounting box depth: 32mm



15 Amp Switched Socket

Part No	Description	Pack	CBM
J615S	15A switched socket	10*10	0.041
J615SL	15A switched socket with neon	10*10	0.041

- 15A Manufactured to BS 546
- Minimum mounting box depth: 35mm



16 Amp Socket

Part No	Description	Pack	CBM
J616S	16A socket	8*10	0.0318

- All switches 16 Amp, 16AX inductive rated
- Minimum mounting box depth: 32mm



TV & Internet Outlet

Part No	Description	Pack	CBM
J604	TV Outlet	10*10	0.041
J609	TV & DATA Outlet	10*10	0.041


- Manufactured to BS 5733 where applicable
- Minimum mounting box depth: J604 32 mm, J609 47mm



Tell & Satellite Outlet

Part No	Description	Pack	CBM
J603	Telephone Outlet	10*10	0.041
J605	DATA Outlet or computer Outlet	10*10	0.041
J606	Satellite Socket	10*10	0.041

- Manufactured to BS 6312 where applicable
- Minimum mounting box depth: J606 26mm, J603 35mm, J605 47mm

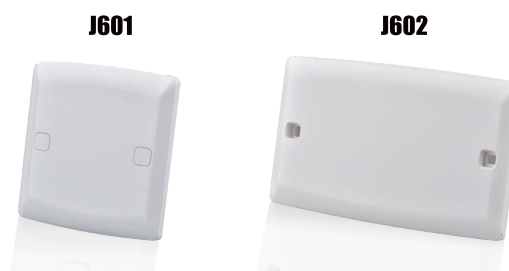

Blank Plates

Part No	Description	Pack	CBM
J601	3X3 Blank plate	10*10	0.041
J602	3X6 Blank plate	10*10	0.041

- Manufactured to BS EN 60670
- Concealed fixing screws

ALPHA SERIES






Modern and refined Alpha collection is the fruit of decades of know-how. Simple and subtle design blend in seamlessly with your environment.



The Alpha series has two different appearance to choose from, the B is rounded and smooth, while the A has slightly convex and concave edges



Wiring diagram

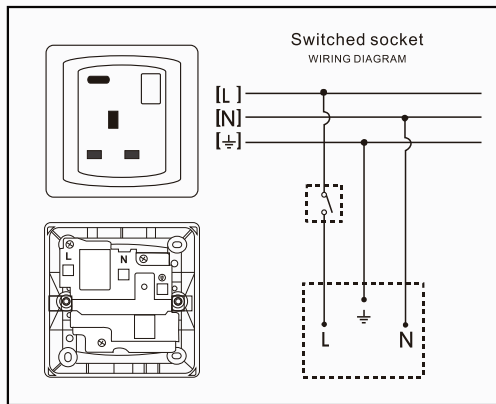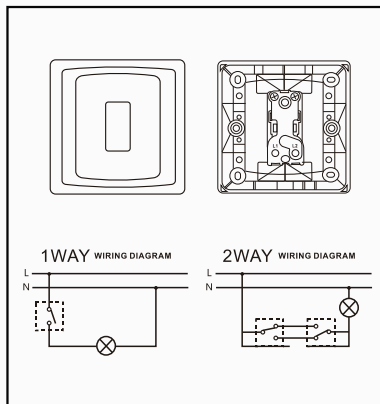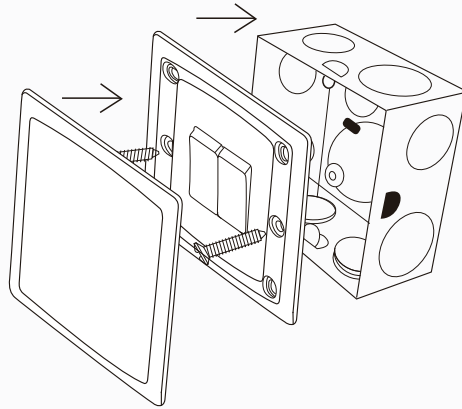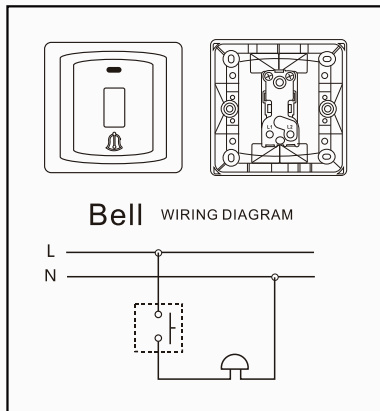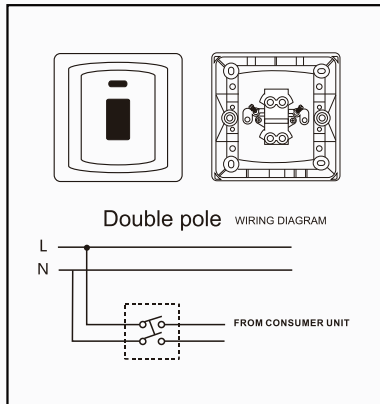

FM 547660



INTERNATIONAL STANDARD

Standard: IEC60669-1,
BS1363-2, BS546, BS4177
Quality Management System - ISO 9001:2008
Certificate No: FM54766
Certificate No: 2020GTC8536206126
Certificate No: 2020GTC8536206226
Certificate No: 2020GTC8536207502
★★★★★



All copper, silver contacts

2611/2612



2621/2622



2631/2632



2641/2642



10 Amp, 10AX Plate Switches

Part No	Description	Pack	CBM
2611	1 gang 1 way switch	10*10	0.03
2612	1 gang 2 way switch	10*10	0.03
2621	2 gang 1 way switch	10*10	0.03
2622	2 gang 2 way switch	10*10	0.03
2631	3 gang 1 way switch	10*10	0.03
2632	3 gang 2 way switch	10*10	0.03
2641	4 gang 1 way switch	10*10	0.03
2642	4 gang 2 way switch	10*10	0.03

- All switches 10 Amp, 10AX inductive rated
- Captive terminal screws
- Terminal capacity 4 × 1.0mm², 4 × 1.5mm², 2 × 2.5mm² & 1 × 4mm²

- Minimum mounting box depth: 1, 2, 3 & 4 gang 25mm

2762



2862



- Minimum mounting box depth: 2762 32mm 2862 35mm

Fan Controller-5 Speed & Light Controller

Part No	Description	Pack	CBM
2862	Fan speed switch	10*10	0.03
2762	Light Dimmer Switch	10*10	0.03

2611B



- Minimum mounting box depth: 25 mm

Bell Push Switch

Part No	Description	Pack	CBM
2611B	Bell Push	10*10	0.03

2620L



2645L



2648L



20 Amp, 20AX & 45 Amp, 10AX Plate Switches

Part No	Description	Pack	CBM
2620L	20AD.P.switch with neon	10*10	0.03
2645L	3×3 45AD.P.switch with neon	10*10	0.03
2648L	3×6 45AD.P.cooker unit with neon	5*10	0.03

- L&N terminal capacity 4×4.0mm², 3×6mm² & 1×16mm²
- E terminal 4×4.00mm², 3×6.0mm² & 1×6mm²

- Minimum mounting box depth: 2645L & 2648L 32mm, 2620L 25mm

8655SL



8656SL



8660SL



8660SDL



Multi 13 Amp Socket

Part No	Description	Pack	CBM
8655SL	Multi 13A switched socket with neon	10*10	0.03
8656SL	Multi switched socket with neon & 2 pin socket	10*10	0.03
8660SL	Multi 13A switched socket with neon & 2USB	10*10	0.03
8660SDL	Double multi 13A switched socket with neon & 2USB	5*10	0.03

- All switches 13 Amp, 13AX inductive rated
- Captive terminal screws
- Terminal capacity 4 × 1.0mm², 4 × 1.5mm², 2 × 2.5mm² & 1 × 4mm²

- Minimum mounting box depth: 8655SL, 8656SL & 8660SL 32mm
- 8660SDL 35mm

8618S



- Minimum mounting box depth: 35mm

15Amp & 13Amp Switch Socket

Part No	Description	Pack	CBM
8618S	15A & 13A switch socket	5*10	0.03

8613SL



8659S



8659SD



8613SDL



13 Amp Socket

Part No	Description	Pack	CBM
8613SL	13A switched socket with neon	10*10	0.03
8659S	13A switched socket with 2USB	10*10	0.03
8659SD	Double 13A switched socket with 2USB	5*10	0.03
8613SDL	Double 13A switched socket with neon	5*10	0.03

- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity
- protective connection Ref.BS 7671:2008
- Manufactured to BS 1363-2
- Terminal capacity 3 × 2.5mm², 3 × 4.0mm², & 2 × 6.0mm²
- Minimum mounting box depth: 8659S 35mm, 8659SD 47mm 8613SL&8613SDL 32mm

8615SL



8625SD



- 15A Manufactured to BS 546
- Minimum mounting box depth: 35mm

15 Amp Switched socket

Part No	Description	Pack	CBM
8615SL	15A switched socket with neon	10*10	0.03
8615SD	Double 15A switched socket	5*10	0.03

8609



8610



- Minimum mounting box depth: 47mm

TV & Internet Socket

Part No	Description	Pack	CBM
8609	TV & DATA Outlet	10*10	0.03
8610	Telephone & DATA Outlet	10*10	0.03

8604



8604D



- Manufactured to BS 5733 where applicable
- Minimum mounting box depth: 25mm

TV Outlet

Part No	Description	Pack	CBM
8604	TV Outlet	10*10	0.03
8604D	Double TV Outlet	10*10	0.03

8606



8605/8603



- Manufactured to BS 6312 where applicable
- Minimum mounting box depth: 8606 25mm, 8605&8603 47mm

Tell & Satellite Outlet

Part No	Description	Pack	CBM
8606	Satellite Socket	10*10	0.03
8603	Telephone Outlet	10*10	0.03
8605	DATA Outlet or computer Outlet	10*10	0.03

J601



J602



- Manufactured to BS EN 60670
- Concealed fixing screws

Blank Plates

Part No	Description	Pack	CBM
2601	3X3 Blank plate	10*10	0.03
2602	3X6 Blank plate	10*10	0.03

METAL CLAD

The metal clad surface mounted range is a combination of durability and reliability. Your first choice for the toughest environment. MGC metal clad range has a rugged design with tough and performance.



The METAL CLAD series has two styles: M1 has a one position switch size of 76x76x41 and a two position switch size of 137x77x41. M2 has a one position switch size of 86x86x40 and a two position switch size of 146x86x40





FM 547660



INTERNATIONAL STANDARD

Standard: IEC60669-1,
BS1363-2, BS546, BS4177
Quality Management System - ISO 9001:2008
Certificate No: FM54766
Certificate No: 2020GTC8536206126
Certificate No: 2020GTC8536206226
Certificate No: 2020GTC8536207502
★★★★★



All copper, silver contacts

Size : 86x86 146x86
Base: 86x86x40 146x86x40

3011/3012



3021/3022



3031/3032



3041/3042



10 Amp, 10AX Plate Switches

Part No	Description	Pack	CBM
3011	1 gang 1 way switch metal box	1*50	0.026
3012	1 gang 2 way switch metal box	1*50	0.026
3021	2 gang 1 way switch metal box	1*50	0.026
3022	2 gang 2 way switch metal box	1*50	0.026
3031	3 gang 1 way switch metal box	1*50	0.026
3032	3 gang 2 way switch metal box	1*50	0.026
3041	4 gang 1 way switch metal box	1*50	0.026
3042	4 gang 2 way switch metal box	1*50	0.026

- All switches 10 Amp, 10AX inductive rated
- Captive terminal screws

- Terminal capacity 4 × 1.0mm², 4 × 1.5mm², 2 × 2.5mm² & 1 × 4mm²

3020L



3045L



3048L



20 Amp, 20AX & 45 Amp, 10AX Plate Switches

Part No	Description	Pack	CBM
3020L	20AD.P. switch with neon metal box	1*50	0.026
3045L	3x3 45AD.P. switch with neon metal box	1*50	0.026
3048L	3x6 45AD.P. cooker unit with neon metal box	1*30	0.026

- L&N terminal capacity 4 × 4.0mm², 3 × 6mm² & 1 × 16mm²

- E terminal 4 × 4.00mm², 3 × 6.0mm² & 1 × 6mm²

3011B



Bell Push Switch

Part No	Description	Pack	CBM
3011B	Bell Push switch metal box	1*50	0.026

3955S



3955SD



- Terminal capacity 4×1.0mm²
4 ×1.5mm² 2×2.5mm² & 1×4mm²
- All switches 13 Amp
13AX inductive rated
Captive terminal screws

Multi 13 Amp Socket

Part No	Description	Pack	CBM
3955S	Multi13A switched socket with metal box	1*50	0.026
3955SD	Double multi13A switched socket with metal box	1*30	0.026

3913S



3913SD



13 Amp Socket

Part No	Description	Pack	CBM
3913S	13A switched socket with metal box	1*50	0.026
3913SD	Double 13A switched socket with metal box	1*30	0.026

- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity
- protective connection Ref.BS 7671:2008
Manufactured to BS 1363-2
- Terminal capacity 3 ×2.5mm²,3 ×4.0mm²
& 2×6.0mm²

3915S



3915SD



3918SD



15 Amp Switch Socket

Part No	Description	Pack	CBM
3915S	15A switched socket with metal box	1*50	0.026
3915SD	Double 15A switched socket with metal box	1*50	0.026
3918SD	15A &13A switched switch socket metal box	1*30	0.026

- 15A Manufactured to BS 546

M111/M112



M121/M122



M131/M132



M141/M142



10 Amp,10AX Plate Switches

Part No	Description	Pack	CBM
M111	1 gang 1 way switch metal box	1*50	0.026
M112	1 gang 2 way switch metal box	1*50	0.026
M121	2 gang 1 way switch metal box	1*50	0.026
M122	2 gang 2 way switch metal box	1*50	0.026
M131	3 gang 1 way switch metal box	1*50	0.026
M132	3 gang 2 way switch metal box	1*50	0.026
M141	4 gang 1 way switch metal box	1*50	0.026
M142	4 gang 2 way switch metal box	1*50	0.026

- All switches 10 Amp,10AX inductive rated
- Captive terminal screws
- Terminal capacity 4 ×1.0mm²,4 ×1.5mm²,
2×2.5mm² & 1×4mm²


M120L



M145L



M148L

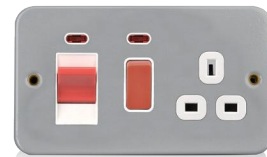

20 Amp,20AX & 45Amp,10AX Plate Switches

Part No	Description	Pack	CBM
M120L	20AD.P.switch with neon metal box	1*50	0.026
M145L	3×3 45AD.P.switch with neon metal box	1*50	0.026
M148L	3×6 45AD.P.cooker unit with neon metal box	1*30	0.026

- L&N terminal capacity 4×4.0mm²,3×6mm²
- E terminal 4×4.00mm²,3×6.0mm² & 1×6mm²
&1×16mm²

M111B



Bell Push Switch

Part No	Description	Pack	CBM
M111B	Bell Push switch metal box	1*50	0.026

M155S



M255S



- Terminal capacity $4 \times 1.0\text{mm}^2$
 $4 \times 1.5\text{mm}^2$ $2 \times 2.5\text{mm}^2$ & $1 \times 4\text{mm}^2$
- All switches 13 Amp
13AX inductive rated
Captive terminal screws

Multi 13 Amp Socket

Part No	Description	Pack	CBM
M155S	Multi13A switched socket with metal box	1*50	0.026
M255S	Double multi13A switched socket with metal box	1*30	0.026

M113S



M213S



13 Amp Socket

Part No	Description	Pack	CBM
M113S	13A switched socket with metal box	1*50	0.026
M213S	Double 13A switched socket with metal box	1*30	0.026

- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity
- protective connection Ref.BS 7671:2008
Manufactured to BS 1363-2
- Terminal capacity $3 \times 2.5\text{mm}^2$, $3 \times 4.0\text{mm}^2$ & $2 \times 6.0\text{mm}^2$


M115S



M215SD



M218SD

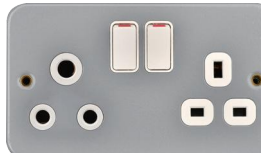

15 Amp Switch Socket

Part No	Description	Pack	CBM
M115S	15A switched socket with metal box	1*50	0.026
M215SD	Double 15A switched socket with metal box	1*50	0.026
M218SD	15A & 13A switched socket with metal box	1*30	0.026

- 15A Manufactured to BS 546

ULTRAF-LAT SERIES

The ultimate screwless flat plate collection is the most trendy design meets modern demands. It is aesthetically pleasing and functionally convenient. You shouldn't miss out this one.



4 Rocker and cover plate colors



Stainless steel

Chocolate brown

Polished Brass

Black nickel

Black nickel



Any colors Available



chocolate brown



FM 547660

INTERNATIONAL STANDARD

Standard: IEC60669-1,
BS1363-2, BS546, BS4177
Quality Management System - ISO 9001:2008
Certificate No: FM547660
★★★★★

2111/2112



2121/2122



2131/2132



2141/2142



10 Amp, 10AX Plate Switches

Part No	Description	Pack	CBM
2111	1 gang 1 way switch	10*5	0.027
2112	1 gang 2 way switch	10*5	0.027
2121	2 gang 1 way switch	10*5	0.027
2122	2 gang 2 way switch	10*5	0.027
2131	3 gang 1 way switch	10*5	0.027
2132	3 gang 2 way switch	10*5	0.027
2141	4 gang 1 way switch	10*5	0.027
2142	4 gang 2 way switch	10*5	0.027

- All switches 10 Amp, 10AX inductive rated
- Captive terminal screws

- Terminal capacity 4 × 1.0mm², 4 × 1.5mm², 2 × 2.5mm² & 1 × 4mm²

- Minimum mounting box depth: 1, 2, 3 & 4 gang 32 mm

8115S



- 15A Manufactured to BS 546
- Minimum mounting box depth: 47mm

15 Amp Switched socket

Part No	Description	Pack	CBM
8115S	15A switched socket	10*5	0.027

8104



- Manufactured to BS 5733 where applicable
- Minimum mounting box depth: 32mm

TV Outlet

Part No	Description	Pack	CBM
8104	TV Outlet	10*5	0.027


2120L



2145L



2148L



20 Amp, 20AX & 45 Amp, 10AX Plate Switches

Part No	Description	Pack	CBM
2120L	20AD.P.switch with neon	10*5	0.027
2145L	3×3 45AD.P.switch with neon	10*5	0.027
2148L	3×6 45AD.P.switch with neon	6*5	0.027

- L&N terminal capacity 4×4.0mm², 3×6mm² & 1×16mm²
- Minimum mounting box depth: 3120L 25mm 3148L & 3145L 32mm
- E terminal 4×4.00mm², 3×6.0mm² & 1×6mm²

8155S



8155SD



8160SD



Multi 13 Amp Socket

Part No	Description	Pack	CBM
8155S	Multi13A switched socket	10*5	0.027
8155SD	Double multi13A switched socket	6*5	0.027
8160SD	Double multi13A switched socket with 2 USB	6*5	0.027

- All switches 13 Amp 13AX inductive rated
- Captive terminal screws
- Terminal capacity 4 × 1.0mm², 4 × 1.5mm², 2 × 2.5mm² & 1 × 4mm²
- Minimum mounting box depth: 8155S & 8155SD 35mm
- 8160SD 47mm

8103/8015



- Manufactured to BS 5733 where applicable
- Minimum mounting box depth: 47mm

Tell & DATA Outlet

Part No	Description	Pack	CBM
8103	Telephone Outlet	10*5	0.027
8105	DATA Outlet or computer Outlet	10*5	0.027

8106



- Manufactured to BS 6312 where applicable
- Minimum mounting box depth: 32mm

Satellite Outlet

Part No	Description	Pack	CBM
8106	Satellite Socket	10*5	0.027

8113S



8113SD



13 Amp Socket

Part No	Description	Pack	CBM
8113S	13A switched socket	10*5	0.027
8113SD	Double 13A switched socket	6*5	0.027

- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity
- Terminal capacity 3 ×2.5mm², 3 ×4.0mm², & 2×6.0mm²
- protective connection Ref.BS 7671:2008
- Minimum mounting box depth:32mm
- Manufactured to BS 1363-2

2101



2102



- Manufactured to BS EN 60670
- Concealed fixing screws

Blank Plates

Part No	Description	Pack	CBM
2101	3X3 Blank plate	10*5	0.027
2102	3X6 Blank plate	6*5	0.027