



Compatible inverter brands

Deye **GROWATT**

solis **SOLINTEG**

FOX
ESS



215kWh_{BATTERY}

Air Cooling Commercial & Industrial Battery System Solution



Flexible

Highly integrated
All pre-assembled
Extendable



Reliable

DC electric circuit safety protection
Multi level battery protection
Fire suppression system




Efficient




Intelligent cooling system
< 10ms Switching Off /
On-grid



Smart

Intelligent cloud platform
management, real-time
monitoring of operational status

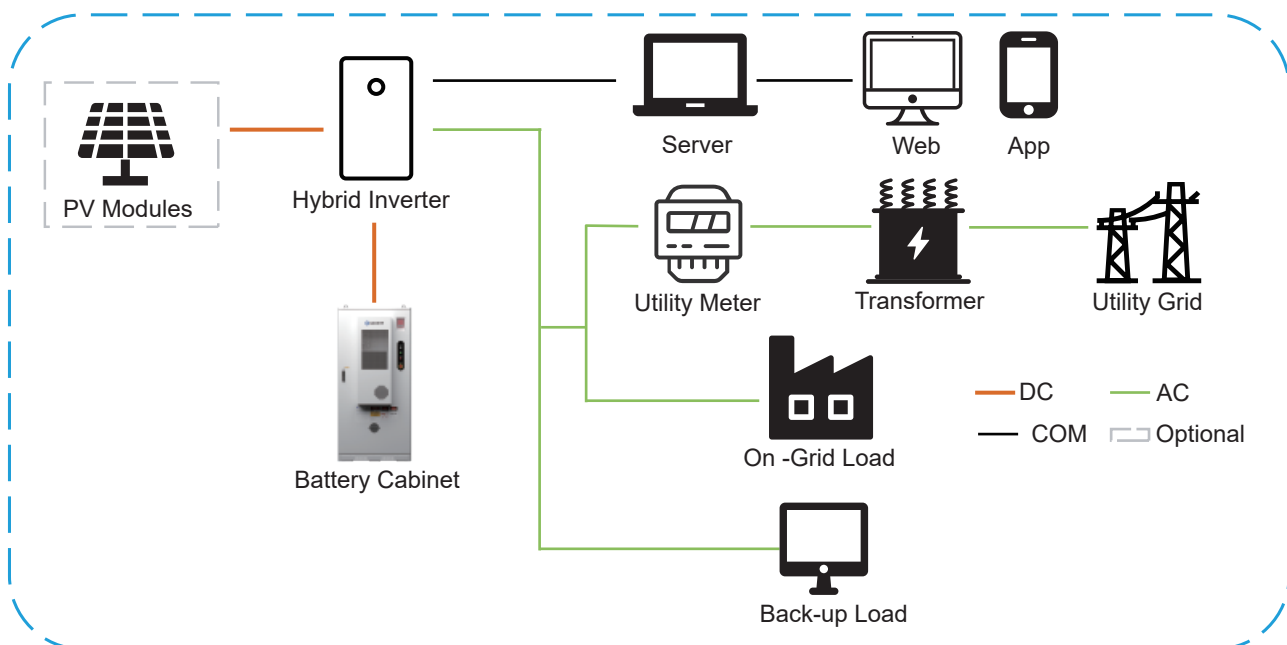

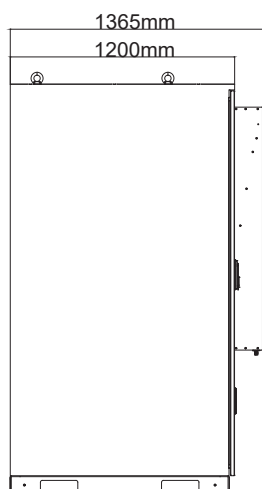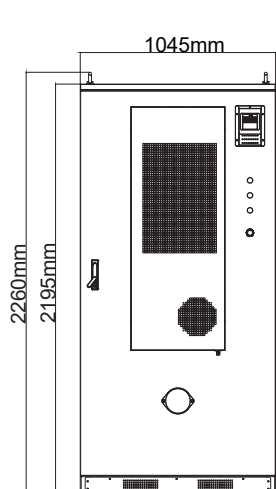

Model	SKTESS215
Battery Type	LiFePO4
Cell Capacity	280Ah
Pack Configuration	1P16S*15
Nominal Capacity	215.04kWh
Nominal Voltage	768V
Operating Voltage Range	672~ 852V
Max.Continuous Charge / Discharge Current	140A
Charge / Discharge Rate	0.5C
Ingress Protection	IP54
Anti-Corrosion Grade	C4
Cycle Life	Cycle Life ≥ 6000 / 5 Years (@25°C ± 2°C , 0.5C / 0.5C, 70% EOL)
Charge Operating Temperature	0°C ~45°C
Discharge Operating Temperature	-20°C~50°C
Operating Temperature Range	-20°C~50°C
Relative Humidity	5~95 % (non-condensing)
Communication	CAN/RS485
Cooling	Air Cooling
Dimension	1045 × 1365 × 2195mm
Weight	≤2000kg
Max. Parallel	5

* Subject to actual delivery