
KEY 使用说明

1. 连接

1.1 布局

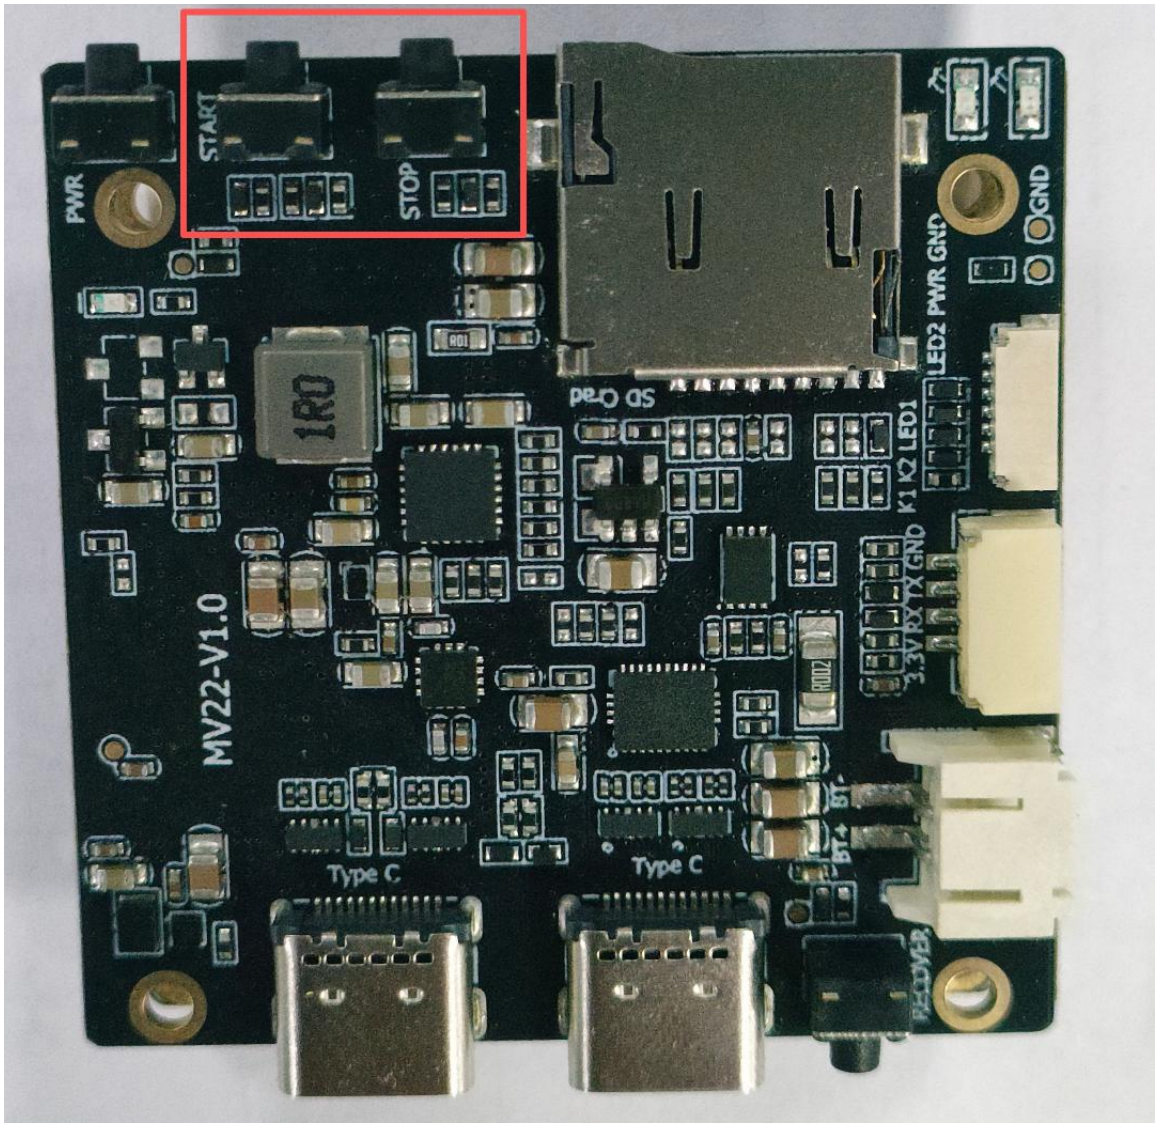

2. 使用 demo

2.2 使用程序 key_app 进行 key 读写

代码位置 KEY/demo/key_app.c
编译：aarch64-linux-gnu-gcc -o ./key_app ./key_app.c

示例：./key_app /dev/input/event2

```
root@linaro-alip:/mnt# ./key_app /dev/input/event2
Waiting for key...
[  383.205136] dwc3 23000000.usb: device reset
[  383.228971] android_work: sent uevent USB_STATE=CONFIGURED


START pressed
STOP pressed
STOP pressed
STOP pressed
STOP pressed
STOP pressed
STOP pressed
START pressed
START pressed
STOP pressed
```