



PIANO

Shanghai Qin Ge Ceramic & Building Co., Ltd.

SHANGHAI QINGE CONSTRUCTION METAL ACCESSORY

CHINESE BUILDING MATERIAL EXPERT, ONE STOP SERVICE PROVIDER



PIANOPLYWOOD



WA BUINESS

WWW.PIANOPLYWOOD.COM

ABOUT US



PIANOPLYWOOD

Our company's main products include Plywood, Film-faced Plywood, LVL, 3PLY, Blockboard, H20 Beam, Timber Wall panel, etc.

Applications: housing construction, building construction, bridge engineering, cement building formwork, home decoration and furniture, shopping shelves, packaging materials, handicraft supplies, container floors, stage formwork, outdoor construction, etc.



Eco-Friendly and Renewable



Resistance to Decay and Mold



Water Bolied Proof



10-year warranty



CE



ISO 9001



CONSTRUCTION METAL ACCESSORY

PRODUCT SPECIFICATION INTRODUCTION

Shanghai Qin Ge Ceramic Building Co., Ltd



CONTENTS

01	/	Black Annealed Wire
02	/	PC Strand
03	/	Steel Rebar
04	/	Steel Pipe
05	/	Edge guardrail
06	/	Steel Grating
07	/	Truss Nail Plate
08	/	Aluminum alloy I-beam
09	/	Metal Formwork
10	/	Manufacturing Scaffolding
11	/	Scaffolding Accessories and Couplings
12	/	Base & Props
13	/	Fastener
14	/	Couplers
15	/	Stacking Pallets for Props
16	/	Ring Lock System
17	/	Professional Ladder
18	/	Wooden Connector
19	/	Nail & Screw

BLACK ANNEALED WIRE

PRODUCT

Black annealed wire



Material

Black annealed wire is black iron wire drawn from Q195 type wire rod.

Craft

After selecting the raw material, it is calcined at a high temperature of about 1000° for asufficient time, and then cooled at an appropriate speed, The purpose is to reducehardness, improve machinability; eliminate residual stress, stabilize size, reduced deformation and crack tendency; refine grain, adjust structure, and eliminate structuredefects.

Features

Softer and more flexible than ordinary black iron wire, with uniform softness and consistent color

Use

Mainly used in construction, mining, chemical industry, welding mesh, welding clotheshanger, reprocessing, etc. After annealing, the iron wire becomes softer and itsflexibility increases, which is better for building wire binding and steel bar binding.

Material:	Processing method:	Tensile strength:	Size:
Steel wire	Cold rawing, annealing	350-550MPA	0.9/1.2*6 or Customized

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

PC STRAND

PRODUCT PC Strand



PC strand is a steel product made by winding multiple steel wires.

Divided into prestressed steel strands (electrical), galvanized steel strands and stainless steel strands.

CRAFT:

Divided into monofilament manufacturing and stranded wire manufacturing, (cold) wire drawing technology is used to make monofilament, and electroplating or hot-plating treatment can be performed. The middle of the steel strand should be required to be other steel wires with the same diameter, strength and zinc layer, and the prestressed steel strand needs to be stabilized continuously after forming.

FEATURES:

high tensile strength and elongation; low relaxation value;
small stress losing; excellent durable anti-fatigue performance.

USE:

In construction, bridge, water conservancy and other projects, unbonded prestressed steel strands are mainly used in floor and foundation projects.

Material	Tensile strength	Size
High-carbon steel	1860/1960	12.7/15.7mm coating unbonded 15.7mm

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

PC STRAND

PRODUCT DISPLAY



ANCHOR-1



Base



SPRING



Ducts (plastics)



Full set-1



Full set-2

ENGINEERING CASE



Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

STEEL REBAR

PRODUCT Steel Rebar



Steel rebar processing generally goes through four processes: steel bar derusting; steel rebar straightening; steel rebar cutting; steel rebar forming.

Classification:

Production process : hot-rolled, cold-rolled, cold-drawn steel rebars, and heat-treated steel rebars made of grade IV steel rebars through heat treatment, with higher strength than the former. Functions in structures: compression rebars, tension rebars, erection rebars, distributed rebars, stirrups, etc.

STANDARD:

BS4449-2005, GB1449.2-2007, JIS G3112-2004, ASTM A615-A615M-04a, etc.

USE:

Steel rebar are widely used in civil engineering constructions such as highways, buildings, bridges, and roads.

Steel wire rod: an alloy or non-alloy rolled product from semi-finished steel, achieves fine cross-sections via cold drawing and is coiled for transport. Steel wire, cylindrical and flexible, can be made into wire rope, greatly enhancing its use in construction.



Material standard	Length	Diameter
High-carbon steel	1-12M	6-50mm



Fax/Tel: +86-21-50792750



RobertWang@pianoplywood.com



PHN/WA/WX: +86-133 1189 1208



www.pianoplywood.com



Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

STEEL PIPE

PRODUCT Steel Pipe



Galvanized steel pipe is a welded steel pipe with a hot-dip or electro-galvanized layer on the surface. Divided into seamless steel pipe and welded steel pipe.

Surface Treatment: Galvanized/Black/Transparent oil, anti-rust oil

Material: Q195/Q215/Q235/Q345

USE: Structure, Accessorize, Construction, Fluid transportation, machinery parts, the stress parts of the automobile.

Outer Diameter		Wall Thickness	Length
inch	mm	mm	meter
1/2"	21.3	0.6-3.0	0.3-12
3/4"	26.9	0.6-3.0	0.3-12
1"	33.4	1.0-3.0	0.3-12
1-1/4"	42.3	1.0-4.0	0.3-12
1-1/2"	48.3	1.0-4.0	0.3-12
2"	60.3	1.5-4.0	0.3-12
2-1/2"	76.1	1.5-4.0	0.3-12
3"	88.9	1.5-9.5	0.3-12
4"	114.3	2.0-9.5	0.3-12
5"	141.3	3.0-9.5	0.3-12
6"	168.3	3.0-12.0	1.0-12
8"	219.1	3.2-12.0	1.0-12
10"	273	3.2-12.0	1.0-12
12"	323.8	6.0-15.0	1.0-12
14"	355.6	8.0-15.0	1.0-12
16"	406.4	8.0-20.0	1.0-12

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China




PIANOPLYWOOD



WA BUSINESS

EDGE GUARDRAIL

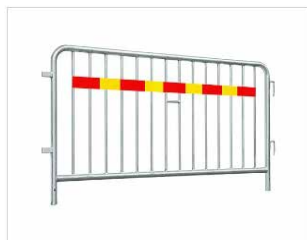


BARRIER HOT DIP GALVANIZED
QG020501



BARRIER POWDER COATED
QG020502



GUARD RAIL HOT DIP GALVANIZED
QG020503

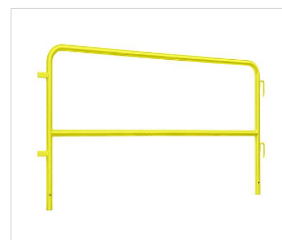

GUARD RAIL POWDER COATED
QG020504



FENCE HOT DIP GALVANIZED
QG020505



FENCE POWDER COATED
QG020506



FOUNDATION PIT GUARDRAIL
QG020507



SUBSTATION FENCE
QG020508



TELESCOPIC FENCE
QG020509



GREEN BELT FENCE
QG020510



RAZOR BARBED WIRE
QG020511



SLOPE PROTECTION NET
QG020512



SECURITY MESH FENCE
QG020513



MOBILE FENCES
QG020514



MOBILE FENCES
QG020515



DECORATIVE GRILLE FENCE
QG020516

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China




PIANOPLYWOOD



WA BUINESS

EDGE GUARDRAIL

PRODUCT EDGE GUARDRAIL

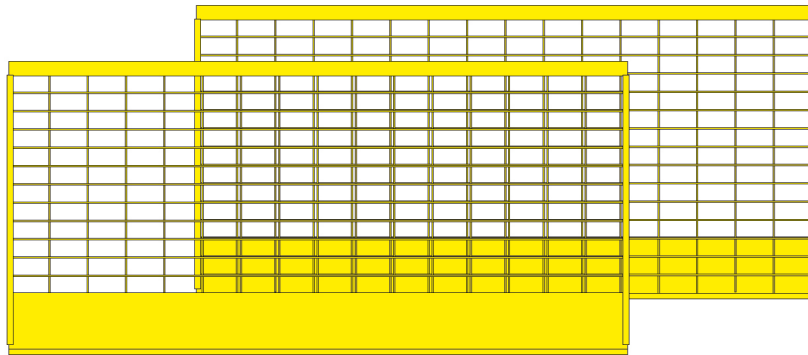



Introduction

Temporary edge protection systems are used in construction work primarily to prevent people and objects from falling to lower levels from roofs, edges, stairs, and other areas where protection is required. In most European countries, temporary edge protection or other types of fall protection systems are required when a risk assessment identifies a fall hazard, regardless of height. Unlike being secured with a lifeline, guardrails provide greater mobility in the work area.

Remove snow and ice that can increase the load on the system. Barriers must never be covered with scaffolding netting or similar materials that affect wind loads.

Notice

Remove snow and ice that can increase the load on the system. Barriers must never be covered with scaffolding netting or similar materials that affect wind loads.

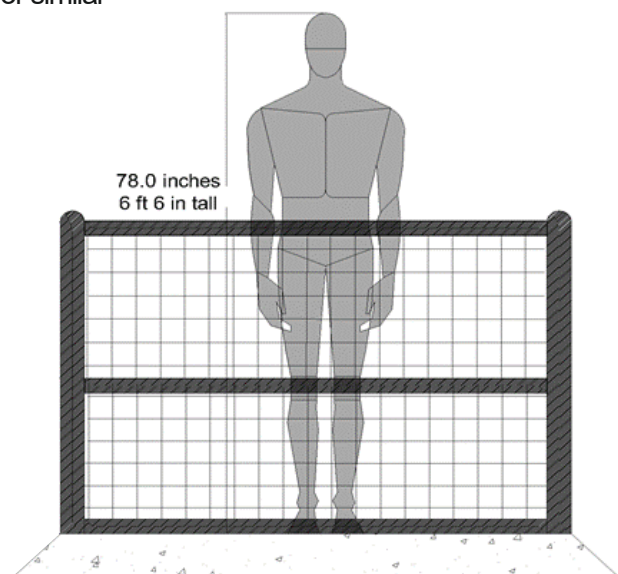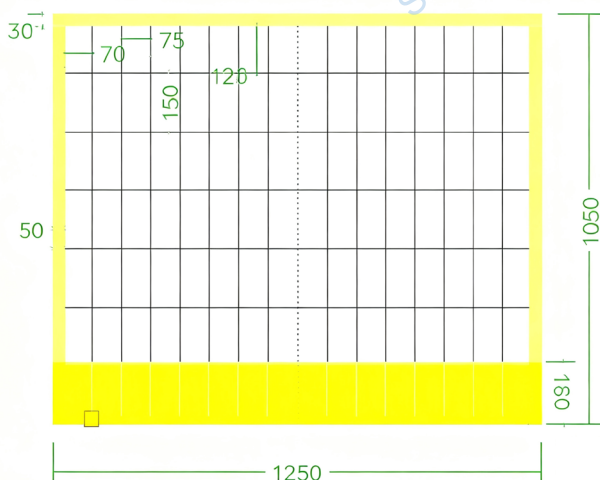

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China




PIANOPLYWOOD





WA BUINESS

EDGE GUARDRAIL

EDGE PROTECTION ACCESSORIES & DRAWING

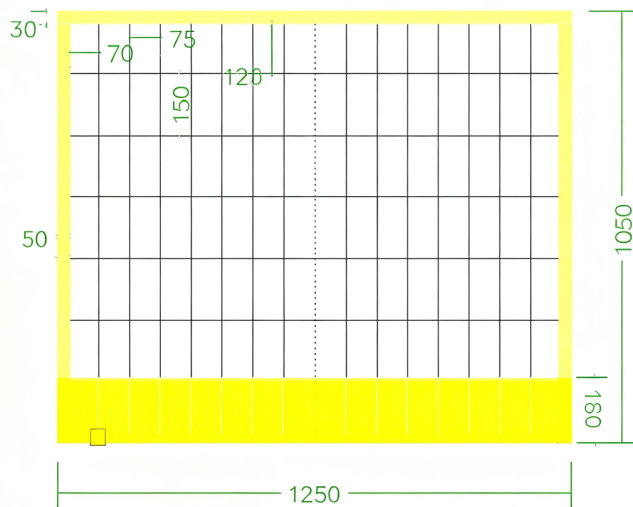

Edge guardrail drawing

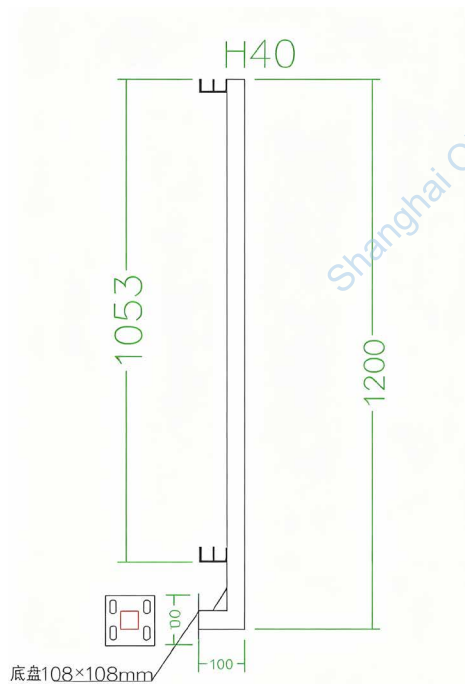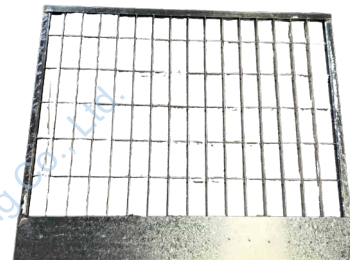

Post drawing



Post & Expansion bolt

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China




PIANOPLYWOOD



WA BUINESS






ELEVATOR SHAFT GUARDRAIL

ELEVATOR SHAFT GUARDRAIL ACCESSORIES & DRAWING

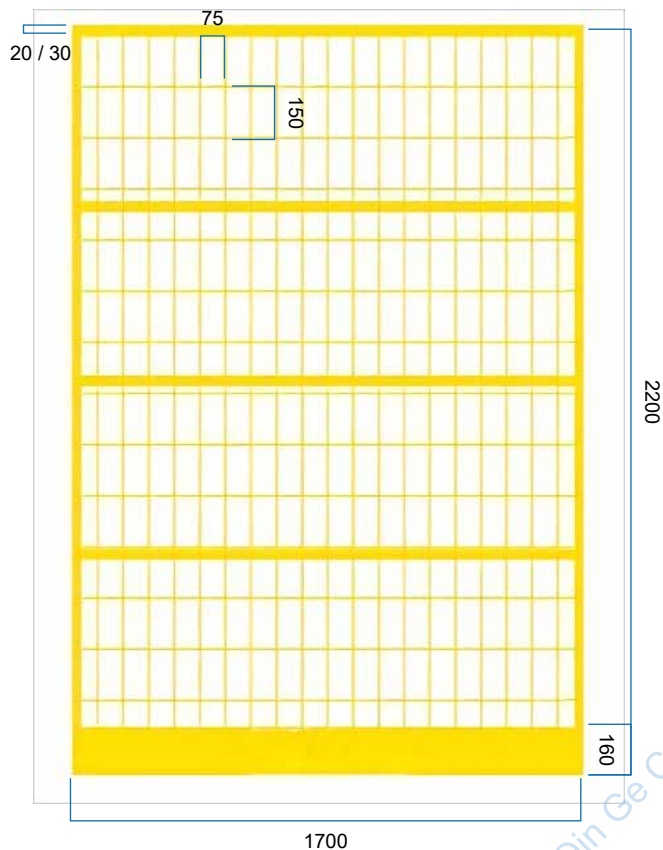

Application scenarios

Elevator shaft guardrail accessories



Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China




PIANOPLYWOOD










WA BUINESS

EDGE GUARDRAIL

-  L: 1300/1950/2600 mm
-  W: 30 mm
-  H: 1222 mm
-  10,8/15,1/19,7 kg
-  Steel + Zn + Powder coating

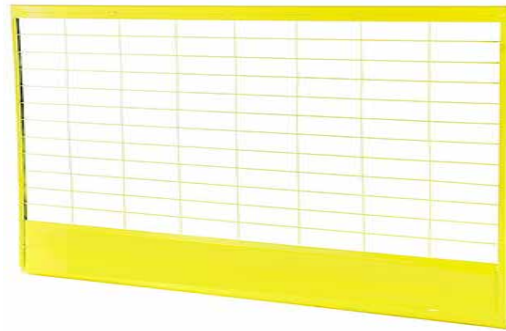

-  1,3–2,6 × 0,91 × 1,42 m
-  537/695/730 kg
-  46/46/35 pcs

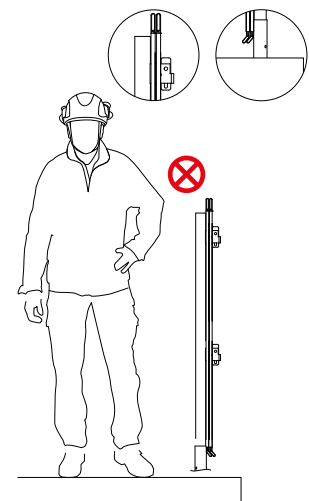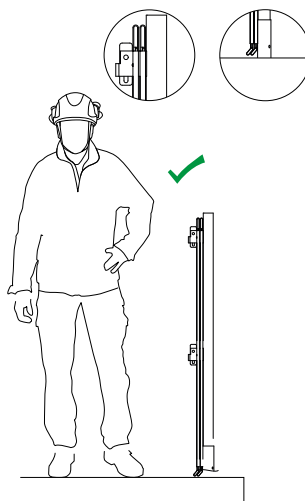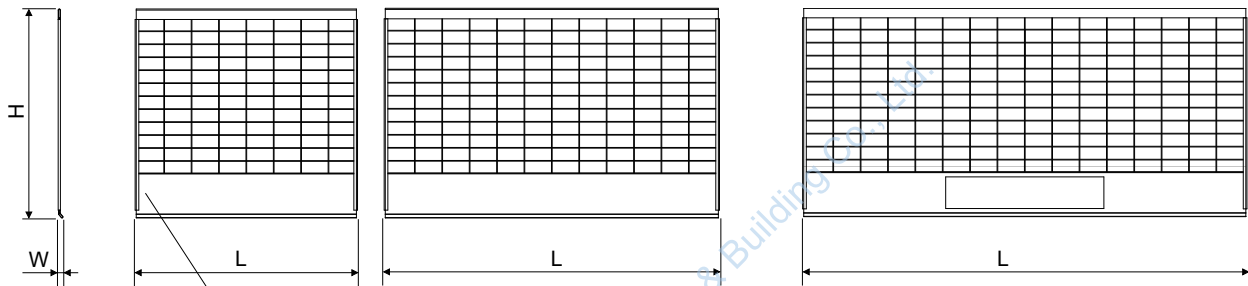

 Fax/Tel: +86-21-50792750

 RobertWang@pianoplywood.com

 PHN/WA/WX: +86-133 1189 1208

 www.pianoplywood.com

 Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China




PIANOPLYWOOD



WA BUINESS

EDGE GUARDRAIL

EDGE PROTECTION LIVE DEMONSTRATION

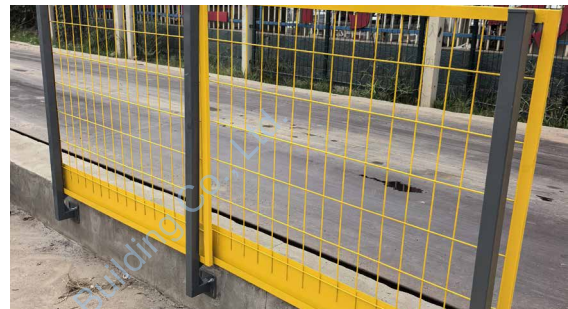

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China




PIANOPLYWOOD



WA BUSINESS

STEEL GRATING

STEEL GRATING

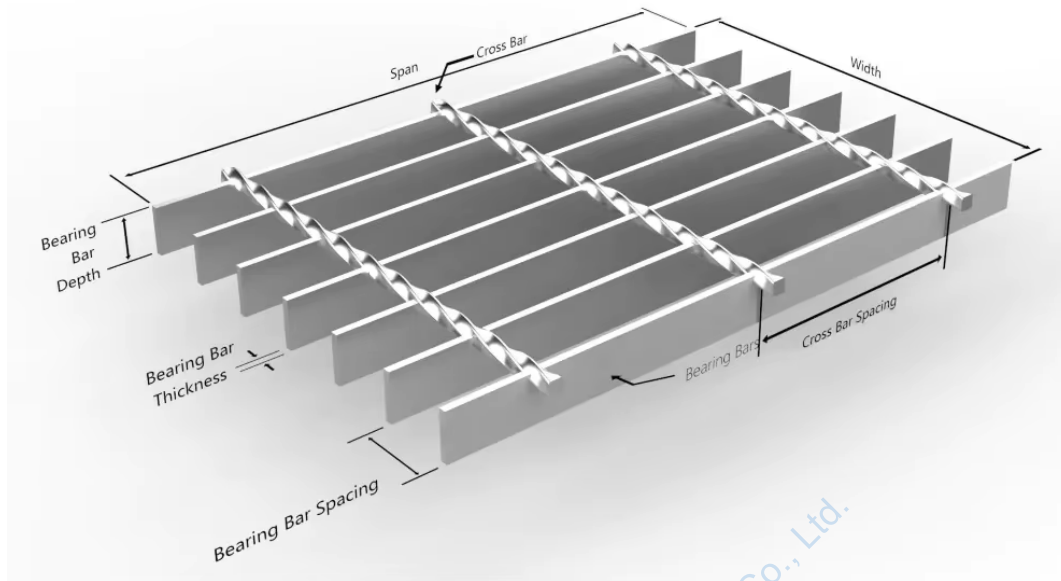

STEEL GRATING

The press welded steel grating, requested by the customers, is made of load flat steel bar and cross bars, placed horizontally and vertically, and at an equal pitch apart, by welding with 200-ton-hydraulic resistance automatic welding equipment, then cutting, punching and banding ends. Load bearing steel bar pitch: Pitch between the two neighboring load bearing steel bars is 30mm or 40mm. Cross bar pitch: Pitch between two neighboring cross bars is usually 50mm or 100mm. Special specifications can be done according to your request.

Material	Carbon Steel, Stainless Steel, Aluminum	
Surface treatment	Hot dipped galvanized, Spray painting, Polished and powder coated	
Bearing bar type	Plain(Flat) bar, Serrated bar, I-bar, etc.	
Common specification		
Bearing bar pitch (mm)	Cross bar pitch (mm)	Bearing bar size (WSG_Height×Thickness_Bearing bar pitch_Cross bar pitch)
30	100	WSG_203/253/323/403/205/325/405/455/505/555_30_100
	50	WSG_203/253/323/403/205/325/405/455/505/555_30_50
40	100	WSG_203/253/323/403/205/325/405/455/505/555_40_100
	50	WSG_203/253/323/403/205/325/405/455/505/555_40_50
60	50	WSG_203/253/323/403/205/325/405/455/505/555_60_50
If you have any questions regarding the dimensions or specific specifications, please feel free to contact us immediately.		

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

STEEL GRATING

PRODUCT APPLICATION SCENARIOS



园林走道

THE GARDEN WALKWAY



污水处理厂

SEWAGE TREATMENT



桥梁码头


BRIDGE PIER



矿山走道

MINE WALKWAY

PRODUCT ADVANTAGES

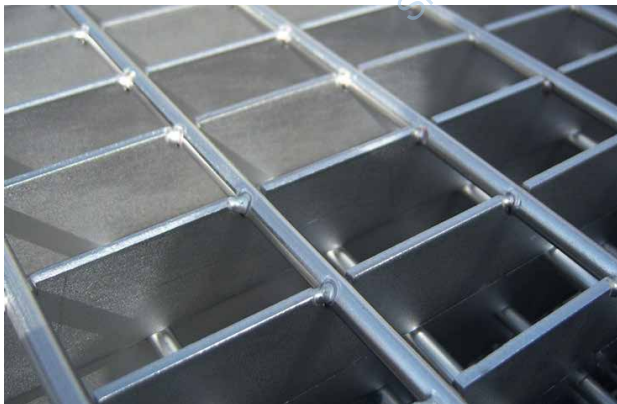

Abundant spot inventory



Strict selection of materials, stable quality

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD




WA BUINESS

TRUSS NAIL PLATE

PRODUCT

Truss Nail Plate

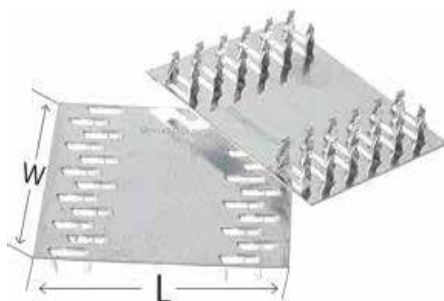

Nail plates are used to connect two or more timber members together. They are available in a variety of sizes.

Material :Galvanized Steel Strip

Surface treatment:Zinc Coated

Header member

- * Supporting member: solid wood, glued-laminated wood, composite lumber, etc.
- * Supported member: solid wood, glued-laminated wood, composite lumber, triangular trusses, profiles.

USE:

Metal Framing Kit Bracket

- * Post/beam connection
- * Jointing
- * Repairs
- * Assemblies requiring a special bending on site, etc

W	L	H	Thickness
50	50/75	0.85mm	1mm
75	75/100/125/150/200	0.85mm	1mm
100	100/125/150*200	0.85mm	1mm
125	125/150/150*200	0.85mm	1mm
150	150/200/150*200	0.85mm	1mm

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUSINESS

ALUMINUM ALLOY L-BEAM

PRODUCT

Aluminum alloy l-beam



Material

Alloy 6063, 6061, 6005 or according to customer's choice

Surface

Anodize, electrophoresis, powder coating, PVDF coating, wood grain painting, matted, etc.

Alloy

6063 / 6061 / 6005 / 6082 / 6060

Features

Compared with wood, the use of aluminum beams has great advantages. Aluminum is lighter and stronger than wood, so larger forms can be assembled, reducing fixing and erecting labor costs.

Use

Aluminum profile for formwork

Size	Weight
Length: 1.2-7.2M W/D: 130, 180, 230, 140mm customized	Excluding wood 3.2KG/M Containing wood 3.8KG/M customized
Various specifications of aluminum alloy Aluminum profile for formwork can be customized.	



Fax/Tel: +86-21-50792750



RobertWang@pianoplywood.com



PHN/WA/WX: +86-133 1189 1208



www.pianoplywood.com



Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China




PIANOPLYWOOD



WA BUINESS

METAL FORMWORK

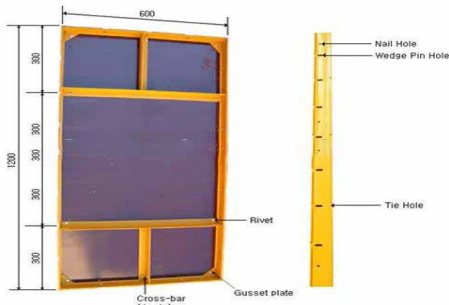

Material:Steel/Aluminium

Surface Finishing:

Electrophoresis, Hot-dip galvanized; Powder Coating

Sizes:

2400*2200*120MM/2400*1800*120mm/2400*1200*120mm/
2400*300*120mm/2400*600*120mm/1200*600*120mm/
1200/300*120mm and we could design by the clientS' sizes and actual concrete requirement.

Profile:2.5MM thickness,120mm long

Feature:

SAFE -The independent table with 6 directions moving restriction.It's a very stable system.

EFFICIENT - It includes only few components, set and removal are very simple. With early stripping mechanism,it can shorten the construction period and save your time.

REDUCED TOTAL COST - Thanks to the early stripping mechanism,the number of panels becomes less and the cost,transportation and storage is reduced.

MINIMUM OPERATORS - 3-4 workers in a team can quickly and easily set up and remove the panels.

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China




PIANOPLYWOOD



WA BUINESS

MANUFACTURING SCAFFOLDING

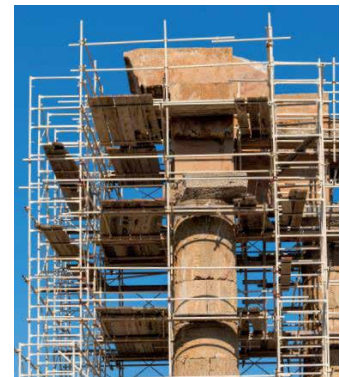

Bushing-type scaffolding

The easiest scaffolding to use due to its standardisation and the fact that it is quick to assemble and disassemble.

Pin-type scaffolding

Standard scaffolding consists of metal frameworks with predefined height and depth. Quick to assemble, quick to disassemble.

Pipe-coupling scaffolding

with their variable geometry obtained by connecting pipes by means of special couplings they can take any direction and angle.

Bushing-type scaffolding, pin-type scaffolding and pipe-coupling scaffolding how they differ.

Different configurations, same supreme quality.

However, each type is designed to perform at its best in different fields and applications.



Fax/Tel: +86-21-50792750



RobertWang@pianoplywood.com



PHN/WA/WX: +86-133 1189 1208



www.pianoplywood.com



Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

SCAFFOLDING ACCESSORIES AND COUPLINGS



Some of these accessories can make assembling and disassembling a scaffolding easier.



Product name	Weight	Photo
Galvanized platform	14KG	
Platform with trapdoor	26KG	
Galvanized ladder	8.5KG	
Galvanized toeboard	length 1,8 m 4.7KG	
Galvanized toeboard	length 1 m 2.80KG	
Scaffold pin	ø 8 weight 0.1kg	
Tubular anchorage with hook for scaffolding pipe	ø48,3x2,75mm ø20 500mm weight 1.90kg	
Base plate for scaffolding	ø40mm pipe ø140x6mm weight 0,90kg	

Fax/Tel: +86-21-50792750

RobertWang@pianopolywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianopolywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

SCAFFOLDING ACCESSORIES AND COUPLINGS



Product name	Weight	Photo
Eyelet for scaffolding	ø 22 mm 120-200 mm weight 0.20kg	
Anchor eye for scaffolding	ø 22 mm M12x90 mm weight 0.50 kg	
Anchor eye for scaffolding	ø 50 mm M12x90 mm weight 0.48 kg	
Anchoring plugs	ø60mm h35mm weight 0.95kg	
Base jack painted	ø38mm pipe 6,35mm pitch plate ø140x6 350mm weight 2,15kg 500mm weight 2,25kg 750mm weight 3,00kg 1000mm weight 4,00kg	
Base jack galvanized	ø38 mm 8.00 mm pitch 150x150x5 plate 350 mm weight 2.30 kg 500 mm weight 2.40 kg 750 mm weight 3.20 kg 1000 mm weight 4.25 kg	
Swivel base jack galvanized	ø38 mm pipe 8.00 mm pitch ø150x150x5 plate 500 mm weight 3.00 kg 1000 mm weight 4.90kg	

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

BASE & PROPS



WD-141



WD-142



WD-143



WD-146A



WD-144



WD-145



WD-147

BASE PLATE

ITEM NO	DESCRIPTION	WEIGHT(KGS)
WD-141	5" x 5" SCAFFOLD BASE PLATE	0.90
WD-142	7" x 9" SHORING BASE PLATE	3.59
WD-143	7" x 7" SHORING BASE PLATE	2.90
WD-144	8" x 8" SHORING U-HEAD	5.83
WD-145	8" x 8" SHORING BASE PLATE	3.62
WD-146	5" x 5" SWIVEL BASE PLATE	1.79
WD-147	8" x 9" SHORING U-HEAD	6.27



WD-20134
1 3/8"X24" SCREW JACK
W/ BASE PLATE
5.39 KGS



WD-20131
1 3/8" SCREW JACK
2.43 KGS



WD-20130
1 3/8" SOCKET JACK
4.98 KGS



WD-20137
30" TB-JACK
9.73 KGS

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

BASE & PROPS



WD-2000
STEEL MULTI-FUNCTION SCAFFOLD
72.57 KGS



WD-2001
STEEL GUARD RAIL ASSEMBLY
37.19 KGS

GALVANIZED PROPS

ITEM NO	OUTER TUBE	INNER TUBE	ADJUSTABLE LENGTH
WD-720	od 60x3.5mm	od 48x3mm	1062mm - 1830mm
WD-720A	od 60x3.5mm	od 48x3mm	1690mm - 3070mm
WD-720B	od 60x3.5mm	od 48x3mm	1981mm - 3361mm
WD-720C	od 60x3.5mm	od 48x3mm	2649mm - 4029mm
WD-720D	od 60x3.5mm	od 48x3mm	3257mm - 5012mm



WD-720



LIGHT DUTY PROPS

ITEM NO	OUTER TUBE	INNER TUBE	ADJUSTABLE LENGTH
WD-722	od 48x2mm od 48x2.5mm	od 40x2mm od 40x2.5mm	1000mm - 1800mm
WD-722A	od 48x2mm od 48x2.5mm	od 40x2mm od 40x2.5mm	1600mm - 2900mm
WD-722B	od 48x2mm od 48x2.5mm	od 40x2mm od 40x2.5mm	2000mm - 3600mm
WD-722C	od 48x2mm od 48x2.5mm	od 40x2mm od 40x2.5mm	2500mm - 4500mm
WD-722D	od 48x2mm od 48x2.5mm	od 40x2mm od 40x2.5mm	3000mm - 5500mm



FF-722

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUSINESS

STEEL PROPS

PRODUCT

STEEL PROPS PRODUCT INTRODUCTION



QUALITY MATERIALS



DURABILITY AND RESISTANCE



SAFETY

Props are the starting point in every multi-storey building construction. They are generally classified into: light props, DIN EN 1065 props, push-pull props, forked props, aluminium props and loading towers.

Besides helping you save materials and time, these props are a safe bet to achieve your results at the worksite.

Ever groundbreakers, since back when we were just small-scale manufactures up to today when we utilise the most advanced metal and finished product machining techniques, always striving to achieve top-notch production. Our props meet all the quality standards required by the most demanding standards regulations worldwide, throughout the entire manufacturing process.

Furthermore they are compatible with the most widespread formwork systems.

PRODUCT ADVANTAGES

1. Steel Props is made of upper plate, inner tube, outer tube, pin, nut, sleeve and bottom plate.
2. The structure is simple and it's easy to assemble and disassemble, so it can be reused.
3. Steel Props can be adjusted to different height of the construction.
4. There are several kinds of Telescopic Steel Prop which are Middle East type, Spanish type and Italian type.
5. It's for supporting concrete slab, beam, timber and formwork which is strong and reliable for interior building construction.

PRODUCTION STANDARDS

EN 1090

ASTM A36/A36M

EN GB/T 50017 GB/T 50011

DIN EN 1065:1998

NF EN 1993-6/NA-2011

BS EN 1065:1999

KS F 8015-2019

SIA 263:2013

UNI EN 1993-1

AS 4100

SI 413



Fax/Tel: +86-21-50792750



RobertWang@pianoplywood.com



PHN/WA/WX: +86-133 1189 1208



www.pianoplywood.com



Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

STEEL PROPS

PIANO PROP SYSTEM DETAILS SYSTEM DETAILS



The Piano Prop system consists of four major components designed to be joined or bolted to suit the application:

1. A range of six Telescopic Props
2. U-Head
3. Prop Pivot End Adapter
4. Raking Shore Foot Bracket

TYPICAL PIANO PROP

A range of high tensile props designed to be used for falsework support, temporary support and raking shores.

U-HEAD

Designed to be inserted into Acrow Prop Inner Tube Top-Plate to support joist or bearer.

RAKING SHORE FOOT BRACKET

Secured to the base slab to provide attachment for Acrow Props via the Prop Pivot End Adapter.

PROP PIVOT END ADAPTER

An adapter to connect Acrow props to the Raking Shore Foot Bracket.



Fax/Tel: +86-21-50792750



RobertWang@pianoplywood.com



PHN/WA/WX: +86-133 1189 1208



www.pianoplywood.com



Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

STEEL PROPS

PRODUCT

PCP – PIANO CHINESE-STYLE PROPS



Props with well-developed and practical details for fast forming.
PIANO PCP 20 and PCP 30 Tubular Steel Props High load-bearing capacity with low weight.

The PCP props from PIANO have been type-tested according to DIN EN 1065.

PCP 30 props correspond to Class E of DIN EN 1065.

The permissible prop load is a minimum of 30 kN for all extension lengths.

Durability

The 100% galvanisation of all surfaces at the end of the production process ensures a long service life.

COLOR+STYLE+SURFACE CRAFTSMANSHIP DISPLAY



Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD




WA BUINESS


STEEL PROPS



PCP 20

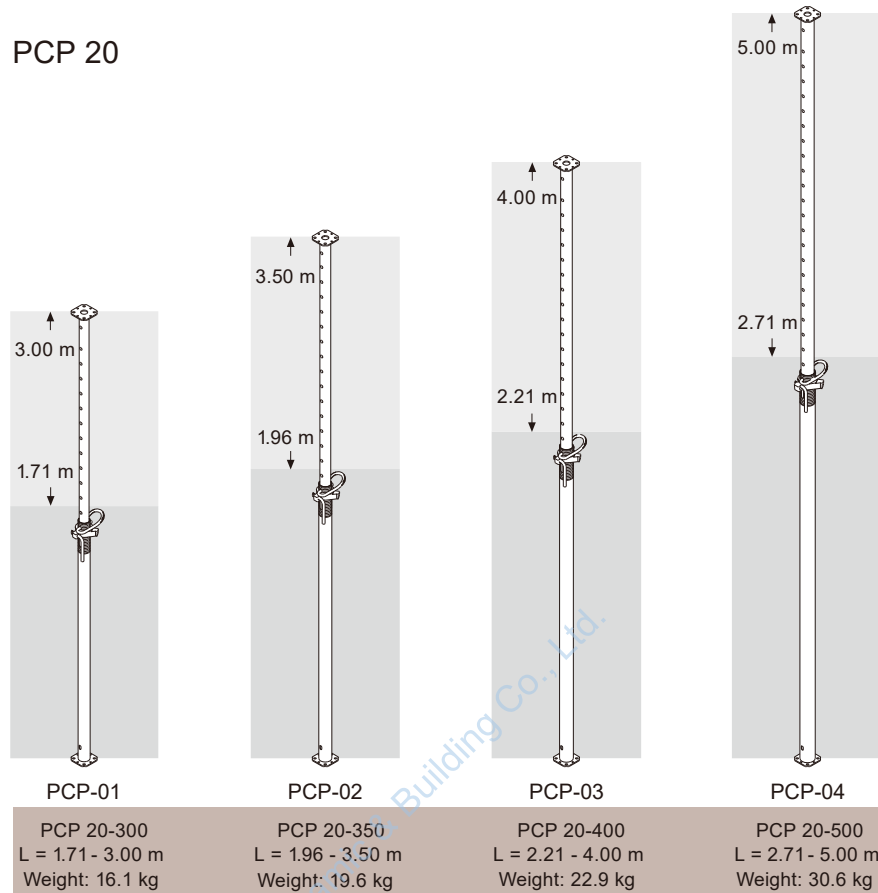

PCP 30

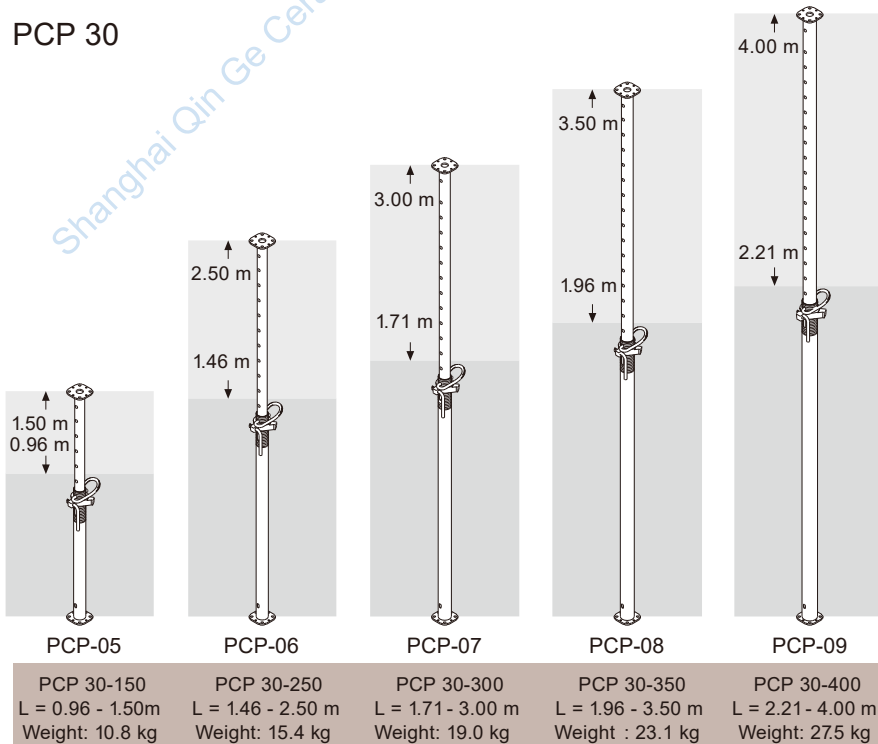

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



FASTENER

PRODUCT Fastener



Formwork Swivel Wing Nut

Size:	D70/80/90/100/110/120/130m
Surface Finish:	Electric Galvanized, HDG, Self Color, Painted
Weight:	0.38-1.16kgs
Process:	Welding, Punching, Casted
MOQ:	As clients' requirement
Weight:	0.38-1.52kgs



#QG021001

Formwork Wing Nut

Size:	D70/80/90/100/110/120/130m
Surface Finish:	Hot dip Galvanized/ Paint/ E-Galvanized
Material: Steel:	Q345/Q235/45# /Galvanized Steel
Process:	Precision casting, forging, pressing
Weight:	0.38-1.52kgs



#QG021002



Nut 70
#QG021003



Nut 80
#QG021004



Nut 90
#QG021005



Nut 100
#QG021006

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

FASTENER

PRODUCT Fastener



Fork Head

Size:	165*85mm
Surface:	Painting/Hot dip galvanized/Electro galvanized
Material:	Steel Q235



#QG021007



Scaffolding Brace Head
#QG021008



Fork Head
#QG021009



Push Pull Head
#QG021010



Push Pull Head
#QG021011

Shoring Prop Sleeve

Tube Size:	D48mm,D60mm,D76mm
Surface:	Electro Galvanized/Self Color/Painted/HDG
Material:	Steel
Length:	200/210/230mm



#QG021012

Shoring Prop Tripod

Height:	700/750/800mm
Surface treatment:	Painting/Hot dip galvanized/Electro galvanized
Material:	Steel Q235
Adjustable Range:	According to customer's request



#QG021013

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUSINESS

FASTENER

PRODUCT Fastener



Formwork Tie Rod

Size:	D15/17mm, D20/23mm
Surface Finish:	Electro Galvanized/Self Color
Surface:	Galvanized
Process:	Cold Rold/Hot Rold
Material:	Steel



#QG021014

Tie Rod Nut

Size:	D70/80/90/100/110/120/130mm
Surface treatment:	Galvanize
Surface:	Hot dip Galvanized/ Paint
Material:	Q345/Q235/Galvanized Steel
Weight:	1.36KG



#QG021015

Formwork Water Barrier

Size:	L110*D60mm
Surface treatment:	Electric Galvanized, HDG, Self Color, Painted
Surface:	Electric Galvanized; Hot Dip Galvanized
Material:	Q345/Q235 /Galvanized Steel
Weight:	0.44kg



#QG021016



Tie Rod
#QG021017



Tie Rod Nut
#QG021018



Water stop
#QG02119



combination
#QG021020

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

FASTENER

PRODUCT Fastener



Alignment Clamp

Size:	Different size as per customer's request
Surface treatment:	Electro Galvanized
Weight:	4.3kg
Material:	Steel



#QG021021

Formwork Rapid Clamp

Size:	For 4-13mm rod
Surface treatment:	Galvanized
Material:	Iron
Custom Make:	Available



#QG021022



Clamp

#QG021023



Ras To Clamp

#QG021024



Rasto Corner Clamp

#QG021025



Rasto Clamp

#QG021026

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

FASTENER

PRODUCT Fastener



Formwork Spring Clamp

Size:	75*110*4mm
Surface treatment:	Electro Galvanized, Painting etc.
Weight:	0.42kg



#QG021027

Framax Clamp

Customised Logo:	We can do the logo as per customer's requirement
Surface	Electro Galvanized, Hot Dip Galvanized
Process:	Casting Iron



#QG021028

Rasto Clamp

Size:	L200, L30*170
Surface:	Electric Galvanized; Hot Dip Galvanized



#QG021029

Accessories

Surface:	Electric Galvanized; Hot Dip Galvanized
----------	---



#QG021030

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUSINESS

FASTENER

PRODUCT Fastener



Formwork Steel Cone

Size:	Custom made
Surface :	Galvanized
Material:	Steel or iron
Weight:	0.94kg
Custom Make:	Available



#QG021031

Shoring Prop Cup

Tube Size:	60mm,D70mm,D90mm
Length:	130/140/200/210/230mm Wall Thickness: 3.0/3.5mm
Surface	Electro Galvanized/Self Color/ Painted/Hot Dip Galvanized
Process:	Rolled Thread
Material:	Steel



#QG021032

Shoring Prop Nut

Size:	60mm, D76mm
Surface :	Electro Galvanized/Self Color/ Painted/Hot Dip Galvanized
Process:	Casted Parts
Material:	Ductile Iron



#QG021033

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

FASTENER



WD-19301
CLAMP
4.30 KGS



WD-19302
CLAMP
3.90 KGS



WD-19303
CLAMP
1.75 KGS



WD-13018
JACK NUT
0.33 KGS



WD-13133
JACK NUT
0.95 KGS



WD-13134
JACK NUT
0.61 KGS



WD-13002
JACK NUT
0.57 KGS



WD-13903
JACK NUT
0.50 KGS



WD-1306A
FORGED WING NUT
0.60 KGS/DIA 70mm



WD-13114-1
WING NUT
0.55 KGS



WD-13113-1
WING NUT
0.55 KGS



WD-13170
FORGED WING NUT
0.38 KGS/DIA 70mm



WD-13001
FORGED LEDGER
0.25 KGS



WD-13003
BOTTOM CUP
0.18 KGS



WD-13016C
ROUND RING
0.435 KGS



WD-13016
ROUND RING
0.48 KGS/134mmX8mm



WD-1380A
FORGED WING NUT
0.58 KGS/DIA 80mm



WD-1300A
FORGED WING NUT
0.60 KGS/DIA 100mm



WD-13110A
FORGED WING NUT
0.80 KGS/DIA 110mm



WD-13106
FORGED WING NUT
1.25 KGS/DIA 130mm

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

FASTENER



WD-13190
FORGED WING NUT
0.70 KGS/DIA 90mm



WD-13172
WING NUT
0.70 KGS



WD-13115
FORGED WING NUT
1.33 KGS/DIA 150mm



WD-13102
FORGED WING NUT
1.07 KGS/DIA 120mm



WD-132101
FORGED WING NUT
1.18 KGS/DIA 120mmX120mm



WD-13112
FORGED WING NUT
1.22 KGS/DIA 100mmX140mm



WD-13105
FORGED WING NUT
1.35KGS/DIA 130mm



WD-13113
FORGED WING NUT
1.08 KGS/DIA 120mm



WD-13011
CASTING-STEEL PROP NUT
0.365 KGS



WD-13012
CASTING-STEEL PROP NUT
0.78 KGS



WD-13107
TEMPLATE HOOK
0.65 KGS



WD-0941
ROUND RING HALF COUPLER
48.3mm 1.20KGS



WD-9916
ROUND RING COUPLER
48.3mm 1.20 KGS



WD-0108
SLEEVE COUPLER
48.3mm 1.12KGS



WD-0109
SLEEVE COUPLER
48.3mmX48.3mm 1.09KGS



WD-0106
PRESSED INNER JOINT PIN
48.3mm 0.75 KGS



WD-0107
SLEEVE COUPLER
48.3mm 1.20KGS



WD-0030
IRON PLATE SWIVEL COUPLER
48.3mm 1.45 KGS



WD-0207
V COUPLER
48.3mm 1.03KGS

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

FASTENER



Shoring Prop Pin

Diameter:	D12-D16
Surface treatment:	Black, Galvanized, HDG
Weight:	0.335-0.85 kg



#QG021034



Pin 10
#QG021035



R Pin
#QG021036



Pin 14
#QG021037

Joint pin for scaffolding


Weight:	670/680/725
Scope of use:	With 48/60 steel pipe



#QG021038

Welded pipe

Size:	33*3*120mm
Weight:	1890g
Scope of use:	200*150*35*4.75mm



#QG021039

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

FASTENER



Scaffolding coupler/clamp

Size:	48/48, 48/60, 60/60
Surface treatment:	Electro galvanized, HDG, Painted
Color:	Sliver/Yellow/customized



#QG021041

Scaffolding coupler/clamp

Size:	48/48, 48/60, 60/60
Surface treatment:	galvanized
Color:	Sliver



#QG021042

Scaffolding coupler/clamp

Size:	48/60, 60/60
Surface treatment:	Electro galvanized, HDG, Painted
Color:	Sliver/Yellow/customized



#QG021043

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUSINESS

COUPLERS



WD-0001
GERMAN TYPE DOUBLE COUPLER
48.3mm 1.25 KGS



WD-0002
GERMAN TYPE SWIVEL COUPLER
48.3mm 1.45 KGS



WD-0035
GERMAN TYPE HALF COUPLER
48.3mm 0.71 KGS



WD-0016
GERMAN TYPE SWIVEL COUPLER
76mmX48.3mm 1.90 KGS



WD-0015
GERMAN TYPE DOUBLE COUPLER
76mmX48.3mm 1.85 KGS



WD-0016B
GERMAN TYPE HALF COUPLER
76mm 1.20 KGS



WD-0002P
GERMAN TYPE SWIVEL COUPLER
48.3mm 1.30 KGS



WD-0001P
GERMAN TYPE DOUBLE COUPLER
76mmX48.3mm 1.10 KGS



WD-0901
AMERICAN TYPE DOUBLE COUPLER
48.3mm 1.60 KGS



WD-0900
AMERICAN TYPE SWIVEL COUPLER
48.3mm 1.75 KGS



WD-0011
GERMAN TYPE DOUBLE COUPLER
60mmX48.3mm 1.50 KGS



WD-0010B
GERMAN TYPE HALF COUPLER
60mm 0.85 KGS



WD-0005
GERMAN TYPE DOUBLE COUPLER
50.8mm 1.45 KGS



WD-0006
GERMAN TYPE SWIVEL COUPLER
50.8mm 1.60 KGS



WD-0004
LIGHT SWIVEL COUPLER
48.3mm 1.25 KGS



WD-0003
LIGHT DOUBLE COUPLER
48.3mm 1.05 KGS



WD-0021
GERMAN TYPE SWIVEL COUPLER
42mmX48.3mm 1.00 KGS



WD-0022
GERMAN TYPE SWIVEL COUPLER
42mmX48.3mm 1.20 KGS



WD-0021A
GERMAN TYPE DOUBLE COUPLER
42mmX50.8mm 1.05 KGS



WD-0022D
GERMAN TYPE SWIVEL COUPLER
42mmX50.8mm 1.10 KGS



WD-0023
GERMAN TYPE SWIVEL COUPLER
42mmX42mm 1.10 KGS



WD-0024
GERMAN TYPE SWIVEL COUPLER
42mmX42mm 1.10 KGS



WD-0101
BRITISH TYPE DOUBLE COUPLER
48.3mm 1.07 KGS



WD-0102
BRITISH TYPE SWIVEL COUPLER
48.3mm 1.25 KGS

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUSINESS

COUPLERS



WD-0901
AMERICAN TYPE DOUBLE COUPLER
48.3mm 1.60 KGS



WD-0900
AMERICAN TYPE SWIVEL COUPLER
48.3mm 1.75 KGS



WD-WD34
AMERICAN TYPE HALF COUPLER
48.3mm 0.85 KGS



WD-0904C
SIDE-BY-SIDE COUPLER
48.3mmX42mm 0.84 KGS



WD-0902
FIXED GIRDER COUPLER
48.3mm 1.42 KGS



WD-0903
SWIVEL GIRDER COUPLER
48.3mm 1.60 KGS



WD-0908T
AMERICAN TYPE SWIVEL COUPLER
89mmX48.3mm 2.95 KGS



WD-0907T
AMERICAN TYPE DOUBLE COUPLER
89mmX48.3mm 2.60 KGS



WD-0909
AMERICAN TYPE HALF COUPLER
89mm 2.10 KGS



WD-0909A
COUPLER WITH WELDED BOLT
89mm 2.35 KGS



WD-0201
AUSTRALIAN TYPE DOUBLE COUPLER
48.3mm 1.12 KGS



WD-0200
AUSTRALIAN TYPE SWIVEL COUPLER
48.3mm 1.30KGS



WD-0204
AUSTRALIAN TYPE HALF COUPLER
48.3mm 0.60 KGS



WD-0206
AUSTRALIAN TYPE SWIVEL COUPLER
50.8mm 1.20 KGS



WD-0203
AUSTRALIAN TYPE DOUBLE COUPLER
50.8mm 1.08 KGS



WD-0205
AUSTRALIAN TYPE HALF COUPLER
50.8mm 0.60 KGS



WD-0801
ITALIAN FORGED DOUBLE COUPLER
48.3mm 1.20 KGS



WD-0802
ITALIAN FORGED SWIVEL COUPLER
X48.3mm 1.53 KGS



WD-0809
ITALIAN PRESSED DOUBLE COUPLER
42mmX50.8mm 1.35 KGS



WD-0810
ITALIAN PRESSED SWIVEL COUPLER
X50.8mm 1.54 KGS



WD-0901A
WEDGE HEAD DOUBLE COUPLER
48.3mm 1.20 KGS



WD-0900A
WEDGE HEAD SWIVEL COUPLER
42mmX42mm 1.37 KGS



WD-0035A
WEDGE HEAD HALF COUPLER
48.3mm 0.60 KGS



WD-0051
COUPLER WITH WELDED PLATE
48.3mm 2.10 KGS

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

STACKING PALLETS FOR PROPS



Name	Description	Photo
Paint coated container for props	Type A 1100x1500mm h900 weight 27kg Type B 920x1280mm h900 weight 25kg	
Galvanised container for props	690x1010mm h720 weight 25kg	
Heavy galvanized sheet metal container	850X1250mm h860mm peso 75kg	
Wire mesh container galvanized	800x1300mm H 875mm Capacity 1-3 Ton weight 50kg	
Container with galvanized printed mesh walls	800x1500 h800 weight 70kg	
Galvanised container for disassemblable feet props	600x1100mm h360+1000mm weight 29+15kg	

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China




PIANOPLYWOOD



WA BUINESS

RING LOCK SYSTEM

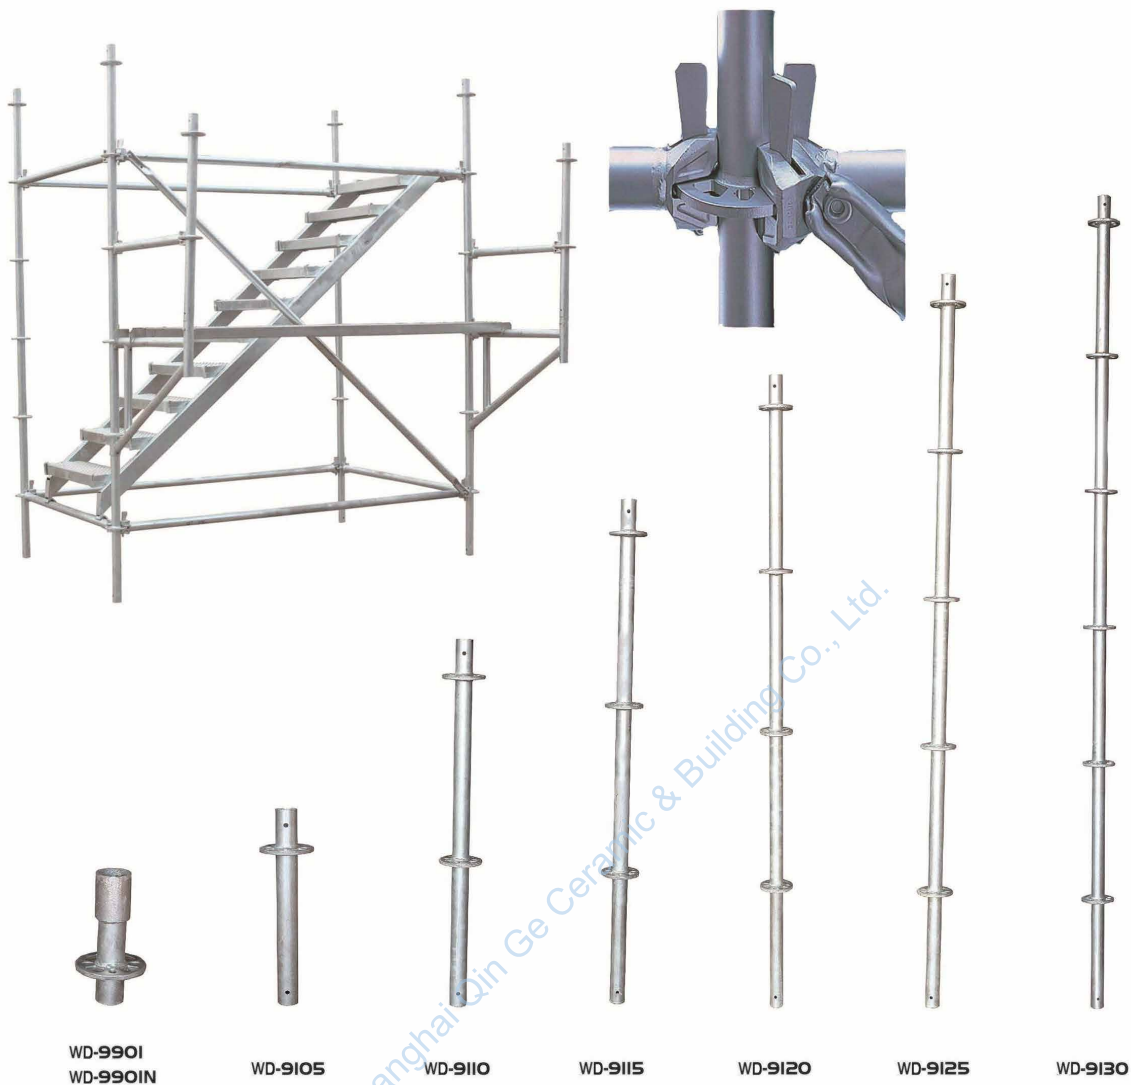

WD-9901
WD-9901IN

WD-9105

WD-9110

WD-9115

WD-9120

WD-9125

WD-9130

VERTICAL POST

ITEM NO	DESCRIPTION	WEIGHT(KGS)
WD-9901	9" STARTER COLLAR	1.60
WD-9901IN	17.5" STARTER COLLAR	2.92
WD-9105	0.5m VERTICAL	3.35
WD-9110	3'3" VERTICAL WITH SPIGOT	5.71
WD-9115	4'9" VERTICAL WITH SPIGOT(1.5m)	8.09
WD-9120	6'6" VERTICAL WITH SPIGOT	10.45
WD-9125	8'2" VERTICAL WITH SPIGOT(2.5m)	12.81
WD-9130	9'9" VERTICAL WITH SPIGOT	15.19

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUSINESS

RING LOCK SYSTEM



TRUSS LEDGERS

ITEM NO	DESCRIPTION	WEIGHT(KGS)
WD-131524	5' TRUSS LEDGER	9.99
WD-131829	6' TRUSS LEDGER	12.09
WD-132134	7' TRUSS LEDGER	14.15
WD-132438	8' TRUSS LEDGER	16.23
WD-132743	9' TRUSS LEDGER	18.32
WD-133048	10' TRUSS LEDGER	21.23
WD-131090	1.09M TRUSS LEDGER	7.27
WD-131290	1.29M TRUSS LEDGER	8.70
WD-131570	1.57M TRUSS LEDGER	10.44
WD-132070	2.07M TRUSS LEDGER	13.93



HORIZONTAL

ITEM NO	DESCRIPTION	WEIGHT(KGS)
WD-130305	1' LOAD BEARER	1.97
WD-130488	1' 6" LOAD BEARER	2.54
WD-130610	2' LOAD BEARER	3.13
WD-130671	2' 2" SINGLE LEDGER	3.35
WD-130732	2' 4" SINGLE LEDGER	3.51
WD-130792	2' 6" SINGLE LEDGER	3.70
WD-130914	3' SINGLE LEDGER	4.27
WD-131097	3' 6" SINGLE LEDGER	4.85
WD-131128	3' 7" SINGLE LEDGER	4.99
WD-131219	4' SINGLE LEDGER	5.43
WD-131311	4' 3" SINGLE LEDGER	5.72
WD-131524	5' SINGLE LEDGER	6.58
WD-131585	5' 2" SINGLE LEDGER	6.80
WD-131829	6' SINGLE LEDGER	7.75
WD-132103	6' 9" SINGLE LEDGER	8.64
WD-132134	7' SINGLE LEDGER	8.90
WD-132438	8' SINGLE LEDGER	10.06
WD-132591	8' 5" SINGLE LEDGER	10.54
WD-132621	8' 6" SINGLE LEDGER	10.64
WD-132743	9' SINGLE LEDGER	11.21
WD-133048	10' SINGLE LEDGER	12.37
WD-133078	10' 1" SINGLE LEDGER	12.46
WD-130730	0.73M SINGLE LEDGER	3.62
WD-131090	1.09M SINGLE LEDGER	4.96
WD-131290	1.29M SINGLE LEDGER	5.72



BOARD BRACKET

ITEM NO	DESCRIPTION	WEIGHT(KGS)
WD-96-01	1# BOARD SIDE BRACKET W/SPIGOT	4.37
WD-96-02	2# BOARD SIDE BRACKET W/SPIGOT	6.79
WD-96-03	3# BOARD SIDE BRACKET W/SPIGOT	8.90
WD-960390	0.39M SIDE BRACKET	5.52
WD-960730	0.73M SIDE BRACKET	9.44
WD-961090	1.09M SIDE BRACKET	8.90

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUSINESS

PROFESSIONAL LADDER



The stairs are a safe, quick and functional solution for professional, intensive domestic and hobby work .

This tool moves without the slightest effort and when you no longer need to use it, fold up very easily making it take up little space.

It is used for finishing or maintenance work at heights that range from 1 to 7 meters.

Feature:

Folding Ladders, Insulation Ladders, Telescopic Ladders

- 1.Extremely durable, novel appearance,elegant and beautiful.
- 2.Wrap around internal spreaders for strength and durability.
3. Non marring slip resistant heavy duty shoes.
- 4.High strength,impact resistance,high safety performance.

size:

Customized Size

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS


WOODEN CONNECTOR

PRODUCT Wooden connector



WOODEN CONNECTOR INFORMATION

Material:	Steel / Galvanized Sheet / Stainless Steel 304
Color:	Zinc / Powder coat / Hot-dip galvanized / Blackening / Chrome / etc.
Surface treatment:	Yellow Zinc Plating
Process:	Stamping / Machining / Welding / Bending / Milling / CNC lathe / etc.
Use:	Furniture fitting / Construction hardware / Auto / Machine / etc.

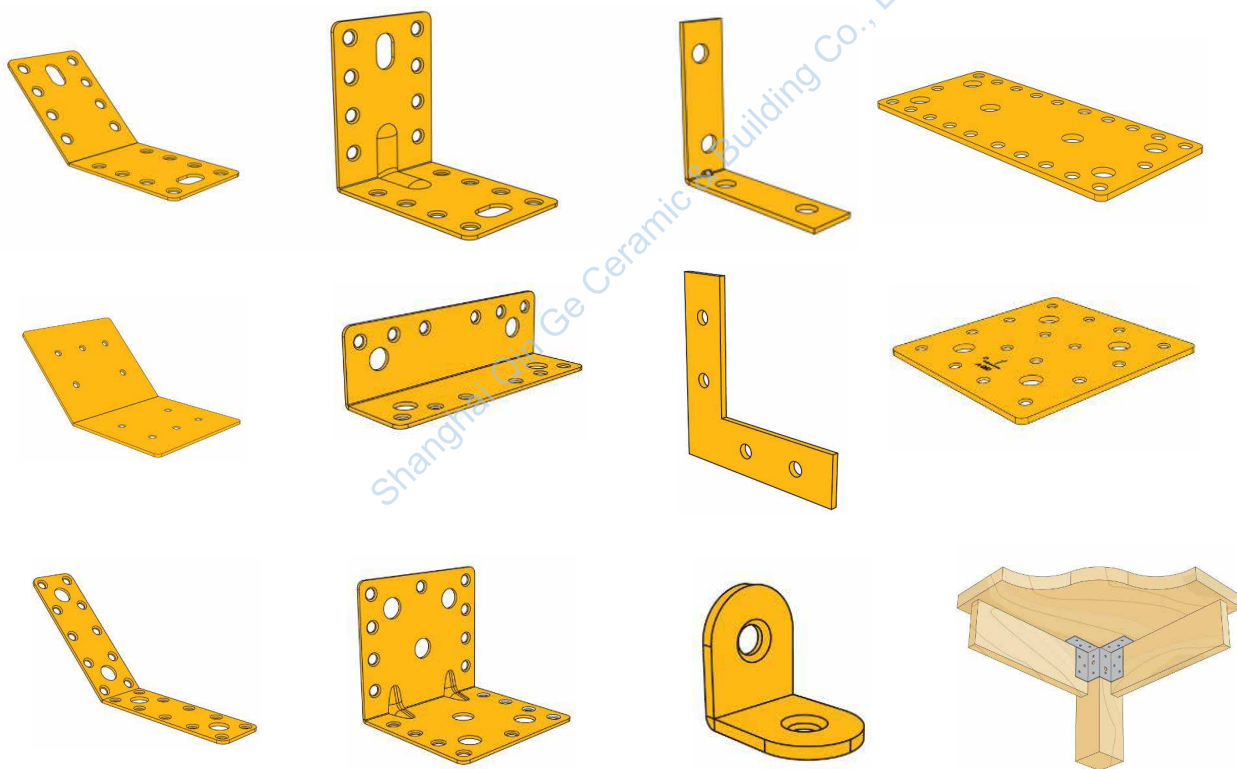

מעלות 135 זווית

135 degree angles

מעלות 90 זווית

90 degree angles

ביסא זווית

chair angle

מחברים

authors

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China








PIANOPLYWOOD









WA BUINESS

WOODEN CONNECTOR

PRODUCT 90 DEGREE ANGLES



NO.	QA-007	QA-008	QA-009	QA-010	QA-011	QA-028
Thickness	2	2	2	2	2	3
A	40	50	35	60	100	70
B	40	50	65	14	100	70
C	34	34	34	34	34	140



NO.	QA-025	QA-026	QG-027	QA-028	QA-040	QA-041
Thickness	2	2	2	3	2	2
A	90	90	150	70	60	60
B	90	90	150	70	90	90
C	65	65	65	140	65	65

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China








PIANOPLYWOOD









WA BUSINESS

WOODEN CONNECTOR

PRODUCT 90 DEGREE ANGLES



NO.	QA-090	QA-042	QA-024	QA-080	QA-101	QA-103
Thickness	2	2	2	3	2	2
A	30	70	70	120	50	70
B	30	70	70	120	50	70
C	65	65	65	132	80	80



NO.	QA-104	QA-105	QA-106	QA-107	QA-108	QA-116
Thickness	2	2	2.5	2.5	2.5	2
A	90	90	105	125	150	90
B	90	90	105	125	150	90
C	80	80	80	80	80	100

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China




PIANOPLYWOOD




WA BUINESS

WOODEN CONNECTOR

PRODUCT 90 DEGREE ANGLES

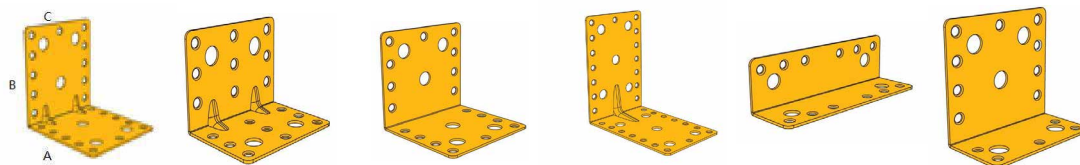

NO.	QA-117	QA-114	QA-115	QA-119	QA-124	QA-132
Thickness	2.5	2	2	2.5	2	2
A	105	70	90	150	40	50
B	105	70	90	150	40	90
C	100	100	100	100	140	100

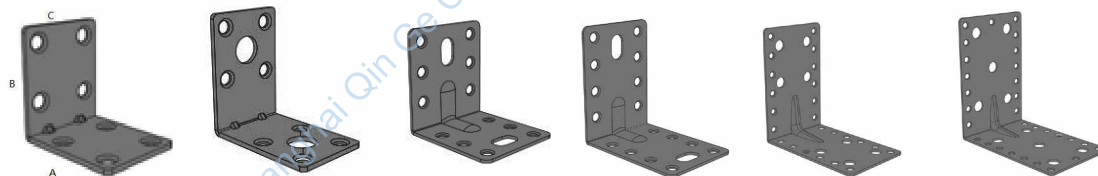

NO.	QA-007B	QA-008B	QA-024B	QA-026B	QA-107B	QA-119B
Thickness	2	2	2	2	2	2
A	40	50	70	90	125	150
B	40	50	70	90	125	150
C	34	34	65	65	80	100

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China




PIANOPLYWOOD



WA BUINESS

WOODEN CONNECTOR

PRODUCT 135 DEGREE ANGLES

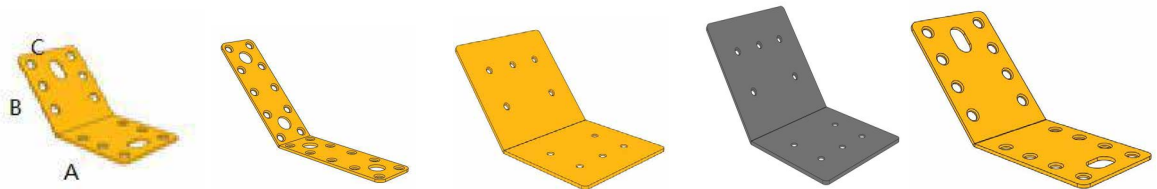

NO.	QA-043	QA-012	QA-078	QA-078B	QA-029
Thickness	2	2	3	3	2.5
A	70	100	120	120	150
B	70	100	120	120	150
C	65	34	132	132	100

Shanghai Qin Ge Ceramic Building Co., Ltd.

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China




PIANOPLYWOOD




WA BUSINESS

WOODEN CONNECTOR


PRODUCT CHAIR ANGLE



NO.	QA-003	QA-061	QA-004	QA-063	QA-065
SIZE:	40*40	50*50	60*60	80*80	100*100



NO.	QA-077
SIZE:	30*20*20



NO.	QA-067	QA-069	QA-071	QA-073	QA-075
SIZE:	30*30	45*45	60*60	75*75	100*100



NO.	QA-006
SIZE:	17*20*20

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China





PIANOPLYWOOD







WA BUSINESS

WOODEN CONNECTOR



PRODUCT AUTHORS



NO.	QA-030	QA-030B	QA-031	QA-031B
SIZE:	65*180	65*180	65*140	65*140



NO.	QA-032	QA-032B	QA-033	QA-033B
SIZE:	34*200	34*200	34*100	34*100



NO.	QA-034	QA-035
SIZE:	Yellow T connector	34*200

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China






PIANOPLYWOOD







WA BUSINESS

WOODEN CONNECTOR



PRODUCT AUTHORS



NO.	QA-048	QA-079	QA-140	QA-140B
SIZE:	100*100	4*120*120	100*120	210*100



NO.	QA-050	QA-051	QA-051B	QA-055
SIZE:	3*140*140	3*132*240	3*132*240	4*100*100



NO.	QA-056	QA-057	QG-054
SIZE:	4*150*150	4*200*200	Silver table connector

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China




PIANOPLYWOOD



WA BUSINESS

WOODEN CONNECTOR

PRODUCT 70 FLOOR MOUNTS



NO.	QC-004	QC-004B	QC-075	QC-075B
Description	Floor mount	Floor mount	Black waves Bracket	Black waves Bracket
Thickness	2	2	2	2
A	80	80	120	120
B	70	70	70	70
C	60	60	70	70

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China




PIANOPLYWOOD




WA BUSINESS

WOODEN CONNECTOR

PRODUCT 95 FLOOR MOUNTS

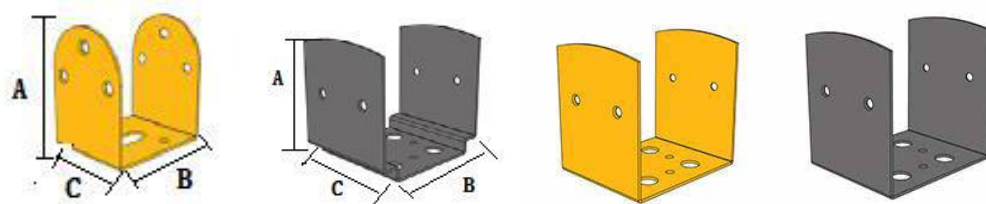

NO.	QC-003	QC-003B	QC-005	QC-005B
Description	Ranked floor mount	Ranked floor mount	Floor mount Ranked floor mount	Floor mount Ranked floor mount
Thickness	2	2	2	2
A	90	90	90	90
B	95	95	95	95
C	80	80	80	80

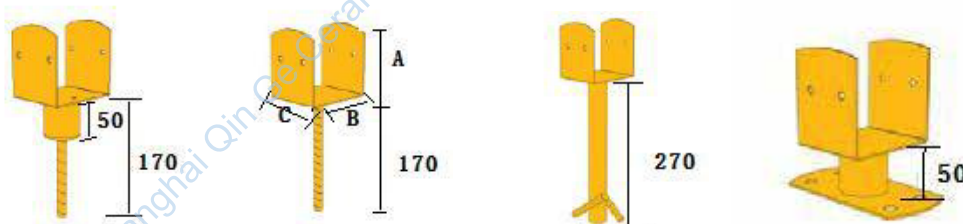

NO.	QD-004	QD-005	QD-013	QD-021
Description	Rod Bracket	Without booster rod Bracket	Bracket Casting	Floor mount Ranked floor mount
Thickness	2	2	2	2
A	90	90	90	90
B	95	95	95	95
C	80	80	80	80

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China






PIANOPLYWOOD





WA BUINESS

WOODEN CONNECTOR

PRODUCT 95 FLOOR MOUNTS



NO.	QC-001	QC-002	QC-055
Description	Small Bracket	Reinforced Bracket	A narrow Bracket
Thickness	2	3	2
A	60	130	40
B	45	45	45
C	60	60	40



NO.	QD-022	QD-024
Description	Bracket Casting	Arod Bracket
Thickness	2	2
A	130	85
B	45	135
C	60	132

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

WOODEN CONNECTOR

PRODUCT 45 FLOOR MOUNTS



NO.	QD-095	QD-095B
Description	Bracket Waves 95	Bracket Waves 95
Thickness	2	2
A	120	120
B	95	95
C	95	95

Shanghai Qin Ge Ceramic & Building Co., Ltd.



Fax/Tel: +86-21-50792750



RobertWang@pianoplywood.com



PHN/WA/WX: +86-133 1189 1208



www.pianoplywood.com



Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD




WA BUSINESS

WOODEN CONNECTOR


PRODUCT SPECIAL SIZE FLOOR MOUNTS




NO.	QD-026	QD-027	QD-090	QD-091
Description	ROD BRACKET			
Thickness	3	3	3	3
SIZE	60*60*170	90*90*170	70*70*170	100*100*170




NO.	QD-036	QD-037
Description	Bracket Casting	
Thickness	3	3
SIZE	120*235*220	150*285*270



NO.	QD-038	QD-039
Description	Surface bracket	
Thickness	3	3
SIZE	120*235*240	120*235*290



NO.	QC-053	QC-053B
Description	Floor Bracket 120	
Thickness	3yellow	3black
SIZE	80*120*80	80*120*80



Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China




PIANOPLYWOOD




WA BUINESS

WOODEN CONNECTOR

PRODUCT 135 FLOOR MOUNTS

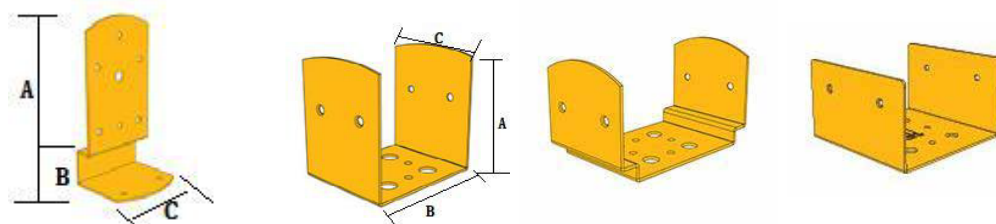

NO.	QC-006	QC-007	QC-008	QC-011
Description	Adjustable Bracket	Floor narrow bracket	Ranked narrow bracket	Wide floor mount
Thickness	2.5	2.5	2.5	2.5
A	190	80	80	80
B	20	135	135	135
C	90	80	80	132

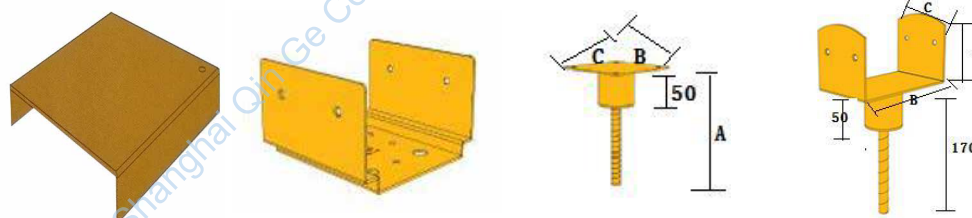

NO.	QC-012	QC-027	QD-003	QD-006
Description	A cross wide floor chassis	Ranked broad Bracket	Rod Bracket 100*100	Narrow rod bracket
Thickness	2.5	2.5	3	2.5
A	12	85	170	80
B	135	135	100	135
C	135	132	100	80

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China







PIANOPLYWOOD







WA BUINESS

WOODEN CONNECTOR

PRODUCT 135 FLOOR MOUNTS



NO.	QD-007	QD-011	QD-012	QD-014
Description	Wide rod bracket	bracket narrow surface	Wide surface bracket	Broad casting bracket
Thickness	2.5	2.5	2.5	2.5
A	80	80	80	80
B	135	135	135	135
C	132	80	132	132



NO.	QC-015	QC-040	QD-008	QD-015
Description	Bracket Casting	Ranked bracket	Rod bracket	Bracket Casting
Thickness	3	3	3	3
A	120	120	120	120
B	135	135	135	135
C	132	132	132	132

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS



Material:

Iron, Q195, Q235

Head:

countersunk checked head, flat head

Features:

- 1) Nails have sharp heads and can easily penetrate into wood
- 2) Nail cap net pattern design, not easy to slip
- 3) The surface is smooth and flat, with metallic luster, which is as bright as new after long-term use
- 4) Complete specifications to meet the needs of various sizes and lengths

Treatment:

Electro galvanized, hot dipped galvanized, vinyl coated

USE:

Building construction, decoration field, bicycle parts, wooden furniture, electrical component, household and so on



Bright finished



Anti-rust




Strong and hard



Skid proof head




Standard test



Non-slip design



Bright finished



Diamond point



Plank



Soft composite



Wall



Doors & Windows



Wooden Products



Decorated Houses



Furniture

Size	Color
Shank diameter: 1.2mm-5.0mm Length:19mm-300mm	Silver White, black,blue,yellow



Fax/Tel: +86-21-50792750



RobertWang@pianoplywood.com



PHN/WA/WX: +86-133 1189 1208



www.pianoplywood.com



Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

SCREW-CHIPBOARD SCREW



Finish:

Yellow Color Zinc Plated

Material:

Steel

Size:

M3.5*30-50mm


M4*30-60mm

M4.5*50-100mm

M5*40-100mm

M6*80-240mm

M8*80-400mm

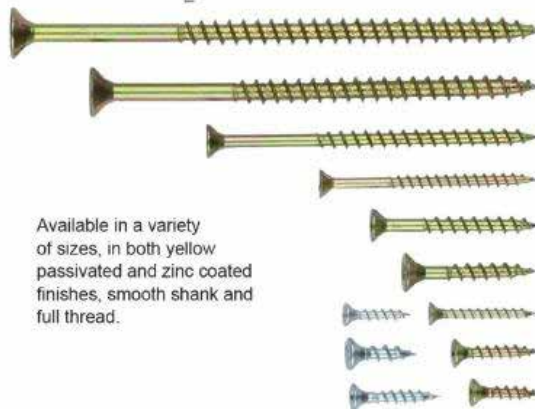

Available in a variety of sizes, in both yellow passivated and zinc coated finishes, smooth shank and full thread.

Main Characteristics

- Ideal for general DIY use.
- Easy to use with any power drill or screwdriver

Ideal for


- Softer type woods
- Joining wood to wood
- Joining metal to wood

Features

- Pozi drive
- Rust resistant

Pozi drive

Use with Pozi bit

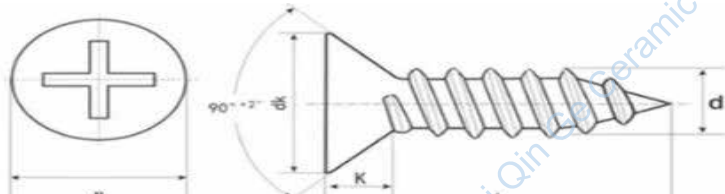

Smooth Shank Screws: For Wood to Wood



No Gap!

The smooth shank turns in top piece while pulling bottom piece tightly together

Smooth shank

Full Thread Screws: For Metal to Wood



Ideal for fastening thin pieces of metal to wood

Full thread

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

SCREW-HEAVY DUTY CHIPBOARD SCREW



Finish:

ZINC PLATED, Silver
Plated, Yellow
Galvanized

Material:

Steel

Size:

M3.5*30-50mm
M4*30-60mm
M4.5*50-100mm
M5*40-100mm
M6*80-240mm
M8*80-400mm



Countersunk head with TX drive

Countersunk head ensures flush fitting of the screw in the installed member. TX drive guarantees optimum torque transfer.



Cutting ribs

Self-countersinking head ensures aesthetic finish result.



Shank ribs

Shank ribs reduces driving torque by reaming the hole.





Serrated thread

Special cutting notches on the thread cut wood structural fibres while the screw is advancing.



Special cutting point

Notched thread tip makes the start of installation easier and prevents timber from splitting.

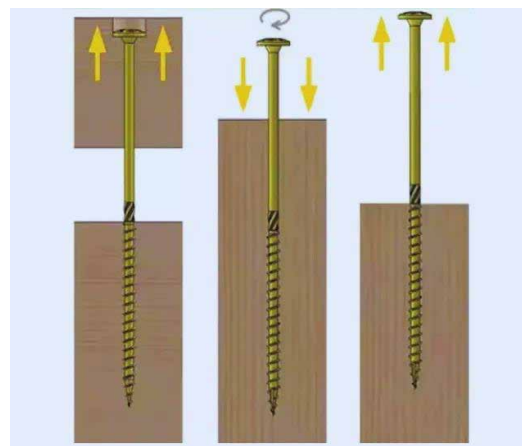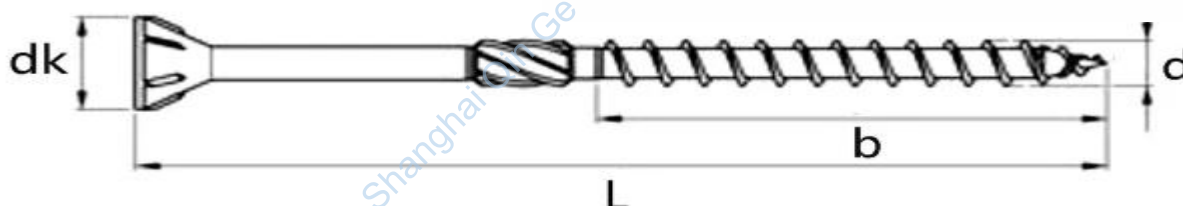

Fax/Tel: +86-21-50792750

RobertWang@pianopolywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianopolywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

SCREW-SELF DRILLING SCREW HEX HEAD

**Material:**

Steel


Size:

M2.2/3.5/3.9/4.2/4.8/6.3

L: 4.5-50mm

APPLICATION:

Electronic, auto, electric appliance, electrical machine, toy, medical treatment spare metal parts, loudspeaker box, furniture and fitness equipment and other industries.

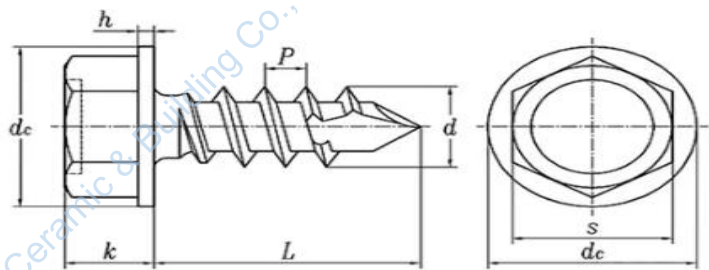


尺寸单位: 毫米(mm)

Self tapping

Spoon screw

Drilling screw #3/#4

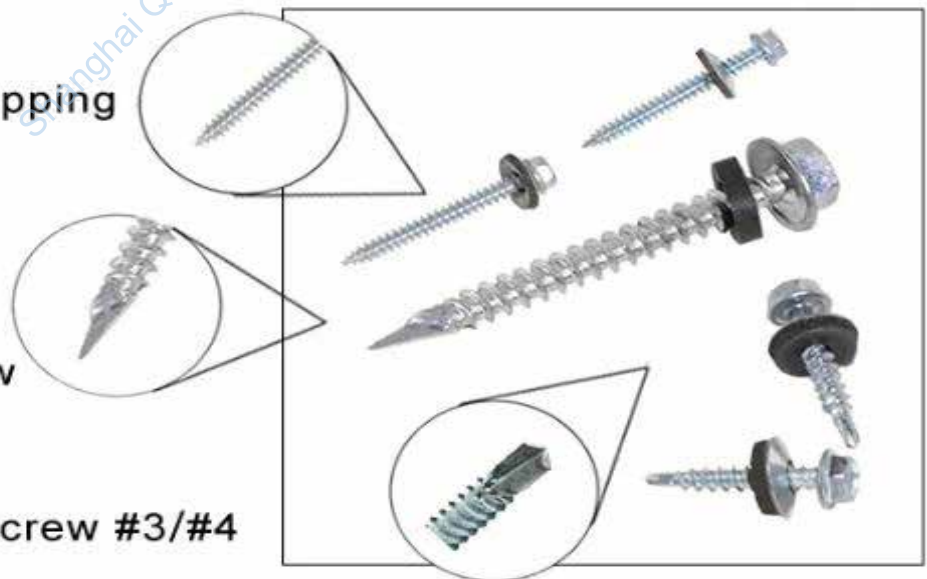

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

SCREW-COUNTERSUNK HEAD SELF DRILLING SCREW



Finish:

ZINC, Plain, ZINC PLATED

Material:

Steel

Size:


M4.8*35/40/50

M5.5*40/50

M6.3*60/70/80

Application:

Heavy Industry, Building Industry, Furniture and Kitchenware, Machinery, General Industry, Automotive Industry, Oil and Gas, etc.

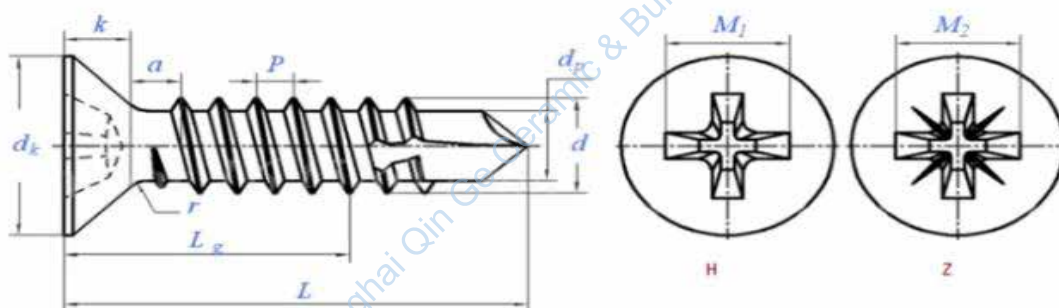

Unit: mm



Special Plastic Bag



Suitable Carton



Wood Fix Pallet



Fax/Tel: +86-21-50792750



RobertWang@pianoplywood.com



PHN/WA/WX: +86-133 1189 1208



www.pianoplywood.com



Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD




WA BUINESS

SCREW-TRUSS HEAD SELF DRILLING SCREW



SIZE	THREAD SIZE(mm)	TOTAL LENGTH(mm)	HEAD DIAMETER (mm)	HEAD THICKNESS (mm)
M4.2*13mm	4.20	15.20	10.26	2.19
M4.2*16mm	4.16	18.17	10.61	2.20
M4.2*19mm	4.15	20.96	10.74	2.06
M4.2*25mm	4.20	27.09	10.54	2.21
M4.2*32mm	4.17	34.29	11.08	2.68
M4.2*38mm	4.15	39.93	10.59	2.46
M4.2*50mm	4.19	52.01	10.63	2.03

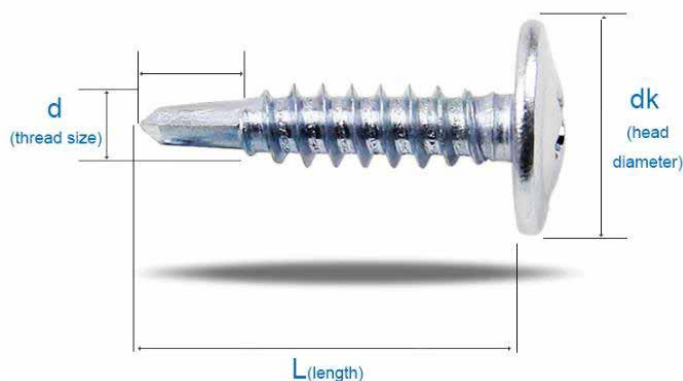

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS

SCREW-DRYWALL SCREW






BLACK PHOSPHATED

GREY PHOSPHATED

ZINC PLATED

Size(inch)	Size(mm)	Size(inch)	Size(mm)
#6x1/2"	3.5X13	#5x1"	2.5X25
#6x5/8"	3.5X16	#8x4"	4.2X100
#6x3/4"	3.5x19	#8x5/8"	4.2X16
#6x1"	3.5X25	#8x3/4"	4.2X19
#10x4"	4.8X100	#8x1"	4.2X25
#10x5"	4.8X125	#10x3"	4.8X75

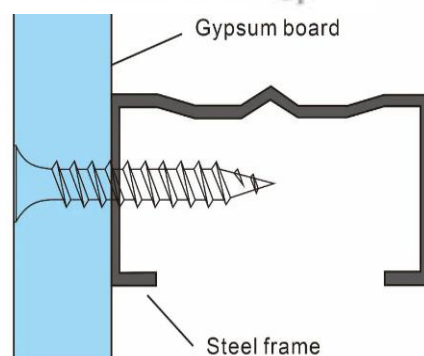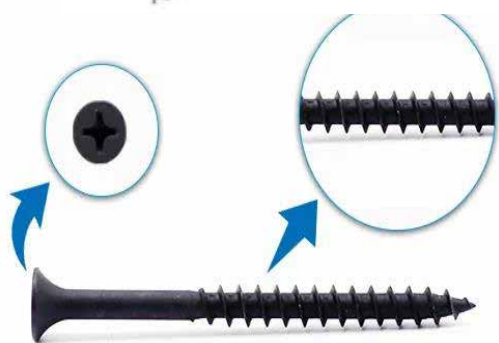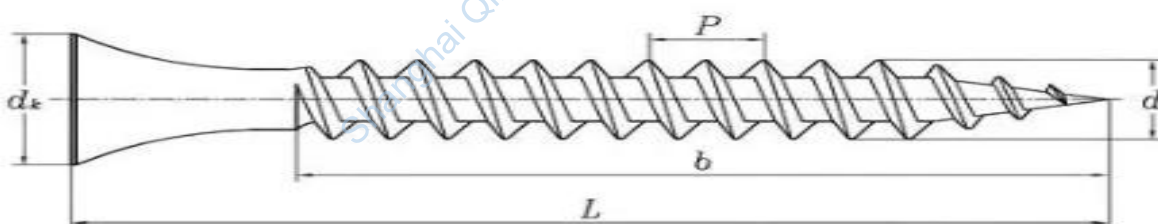

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD




WA BUINESS

SCREW-DRYWALL SCREW



Model	Length (mm)	casing length (mm)	Screw diameter (mm)	casing diameter (mm)	Punch size(mm)
M6*50	50	35	6	8	8mm drilling
M6*80	80	55			
M6*100	100	80			
M8*60	60	40	8	10	10mm drilling
M8*100	100	70			
M8*150	150	120			
M10*60	60	35	10	12	12mm drilling
M10*100	100	75			
M10*150	150	120			
M12*80	80	50	12	16	16mm drilling
M12*120	120	90			
M12*150	150	120			
M16*110	110	70	16	20	20mm drilling
M16*150	150	100			
M16*200	200	150			

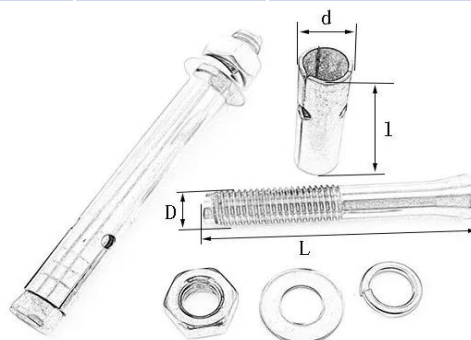

Fax/Tel: +86-21-50792750

RobertWang@pianoplywood.com

PHN/WA/WX: +86-133 1189 1208

www.pianoplywood.com

Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



PIANOPLYWOOD



WA BUINESS



Piano Plywood

CHINESE BUILDING MATERIAL EXPERT, ONE STOP SERVICE PROVIDER

WWW.PIANOPLYWOOD.COM

Fax/Tel: +86-21-50792750

Phone/WhatsApp/WeChat: +86-133 1189 1208

E-mail: RobertWang@pianoplywood.com

Add: Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China



WWW.PIANOPLYWOOD.COM

Shanghai Qin Ge Ceramic & Building Co., Ltd.

Piano Plywood

Fax/Tel: +86-21-50792750

Phone/WhatsApp/WeChat: +86-133 1189 1208

E-mail: RobertWang@pianoplywood.com

Add: Block F, Floor 8, NO.58, New Jinqiao RD, Pudong District, Shanghai 201206, China