

REV	DESCRIPTION OF REVISION	ECN No.	BY	DATE	APPROVED
Rv01	N/A	N/A	J.Wang	2013/5/19	Karl Pan

TECHNICAL DATA

■Electrical data

Impedance	75Ω
Frequency range	0~1GHz
Withstand Voltage	1500V rms
Working Voltage	500V
VSWR	
Straight	≤ 1.22
Contact resistance	
-center contact	≤1.5mΩ
-outer contact	≤1mΩ
Insulation resistance	≥5000MΩ

■Mechanical data


Temperature range	-55°C~+155°C
Durability(matings)	>500

■Material data

Piece Part	Base Material	Plating
Body	Brass	Nickel plated
Center conductor	Brass	Gold plated
Insulator	PTFE	

■Interface Standards

IEC 60169-16 /MIL-C-39012/CECC22210

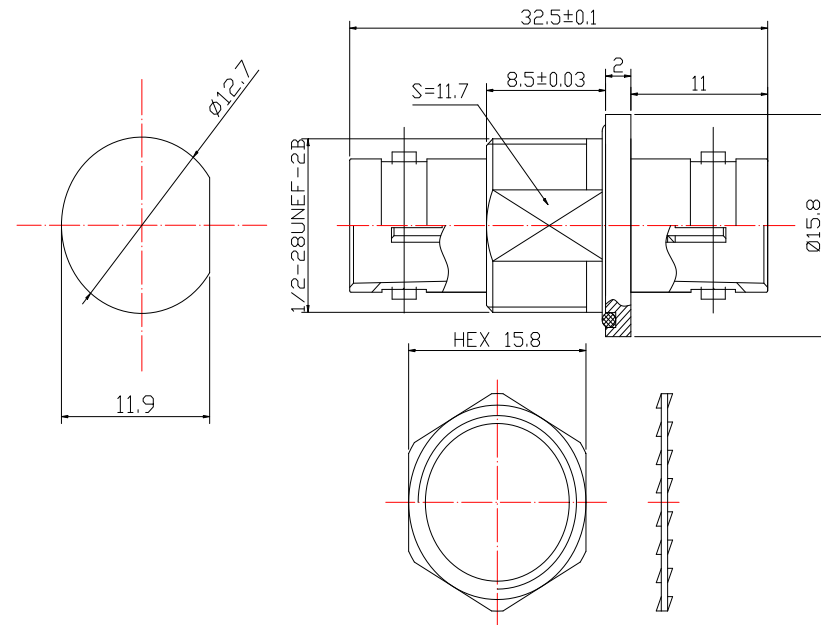

BNC female



BNC female

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITH NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Part Name:				
75ohm BNC Female Bulkhead to BNC Female	www.RF-connectors.com			
WT17D3.640.536	SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: A